


New processor card SA 1

Change the processor card only, when the unit is out of circuit!

Since April 1993 the Stand Alone units have been equipped with new processor cards which can easily be subject to interference. The new processor cards are fully compatible with the previous processor cards, however, the connection of the LCD-display has to be modified. Now the display must be connected directly to the processor card and not to the keyboard card as before. The small bipolar plug for the display illumination is still connected to the keyboard card.

- Proceeding:
- Detach the previous processor card as well as the covering above the display.
 - Take off the connecting plug of the display from the keyboard card and curve the flat cable at right angles (see drawing on the left).
 - Put on the covering above the display and insert the new card.
 - Put in the connecting plug of the display on the new processor card (see drawing on the right)
 - Check the function of the unit, and adjust eventually the contrast of the display (see drawing on the right)

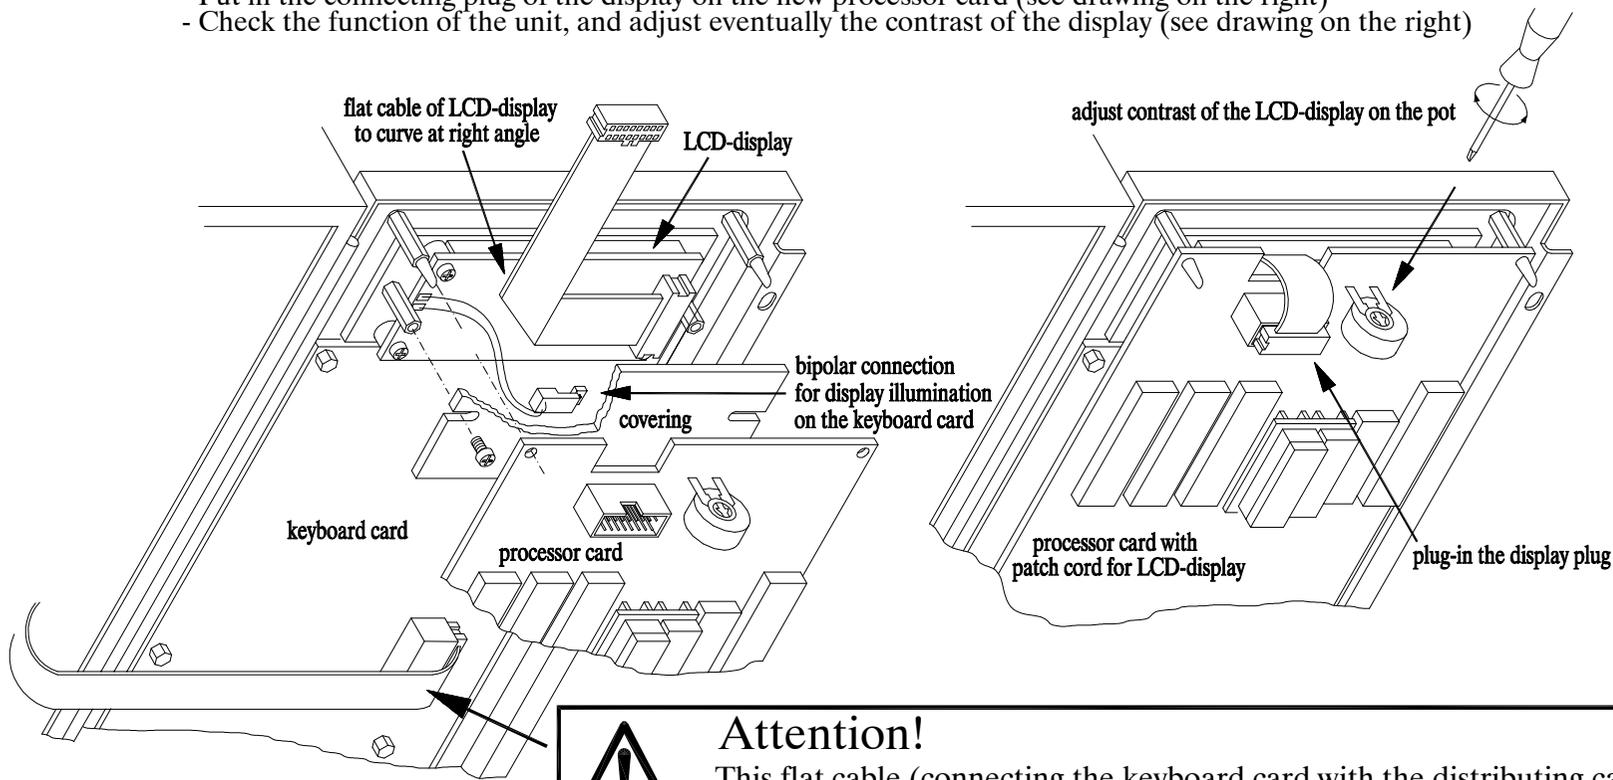

Attention!
 This flat cable (connecting the keyboard card with the distributing card) must not be put into the processor card, otherwise this would be destroyed!

				New Processor Card SA 1		Förster Technik GmbH		Zeichnungs-Nr. ski49c		Blatt			
						gezeichnet		Datum 13.05.93		Auftrags-Nr.			
Änderung				Ind.		Datum		Name		von		Blätter	
						Name		Ruh		Kom.-Nr.			