

Instruction Manual

Automatic Calf Feeder Vario Combi

as of program version 5.12

**TAK5-VH1-55_50_30_32_28 / VDW5-VH1-50_32_30_28 / TAK5-CH1-25 /
VDW5-CH1-25**



Squelch values and identification ranges

The identification range of the antenna is approx. 15 to 25 cm.

The antenna type is crucial to the identification range. With the micro-identification Nedap you can adjust the identification range via the Squelch value.

The following table contains the Squelch values and identification ranges for the different identification systems. These Squelch values are empirical and factory-set.

System	Squelch (default values)	Identification range
Collar (X-Responder-system)	-	20 - 25 cm
Eartag in the collar Eartag (Nedap-system)	0	15 - 18 cm
Eartag in the collar Eartag (Tiris-system)	-	15 - 18 cm

1	Introduction	9
1.1	Safety instructions	9
1.2	Application	10
1.2.1	Intended use of the automatic feeder	10
1.2.2	Adverse use of the automatic feeder	10
1.3	Safety signs	11
1.4	Information signs on the automatic feeder	11
1.5	Icons used in this instruction manual	12
1.6	Specific terms	13
1.7	Abbreviations used in this instruction manual	14
1.8	Contact details of Förster-Technik	15
1.9	Components	16
1.9.1	Compact Combi	16
1.9.2	Vario Combi	17
1.9.3	CPU and relay power board	18
1.9.3.1	Relay power board	18
1.9.4	Heat exchanger with separate heating circuits for milk and water	20
1.9.4.1	Compact Combi	20
1.9.4.2	Vario Combi	21
1.10	Technical data of the automatic feeder	22
1.11	Special danger areas	24
2	Operation	25
2.1	Keyboard	25
2.2	Operating elements and menu structure	26
2.2.1	Animal control	27
2.2.2	Main menu	28
2.2.3	Manual functions	28
2.2.4	Training pump	29
2.2.5	Arrow Up / Arrow Down	29
2.2.6	Enter	29
2.2.7	Arrow right / Arrow left	29
2.2.8	Asterisk	29
2.2.9	C (=delete)	30
2.2.10	ESC(=Escape)	30
2.3	Operating modi	31
2.3.1	Automatic mode	31
2.3.2	Offline-mode	32
2.4	Displays in the automatic mode	32
2.4.1	Display icons	32
2.4.2	Displays in the operating mode of the automatic feeder	35
2.4.2.1	Restricted mode	35
2.4.2.2	Ad libitum-mode	36
2.4.3	Displays referring to the individual animal	36
3	Start-up	39
3.1	Electrical connection provided by customers	39
3.2	Locating the automatic feeder	40
3.3	Mounting the protective grating of the powder hopper extension	40
3.4	Water supply and milk supply	42
3.4.1	Water supply	42
3.4.2	Milk supply	43
3.5	Mounting the feeding station	44
3.6	Connecting the antennas	44

3.6.1	Notes on how to mount the antennas	44
3.6.2	Connecting the antenna cable to the motherboard	45
3.7	Mounting the teat	47
3.8	Filling the heat exchanger.	47
3.9	Portion	48
3.9.1	Adjusting the target (set) and the minimum temperature	48
3.9.2	Setting the parameters for the parallel mode	50
3.9.2.1	Portion dispense with entitlement less than 250 ml	50
3.9.2.2	Tolerance values for concentration and milk ratio	50
3.10	Vapour screen for powder outlet, mixer heating and equipment against frost	51
3.11	Filling the milk powder hopper and the milk tank	52
3.11.1	Filling the milk powder into the powder hopper	52
3.11.2	Filling the milk tank	53
3.12	Calibrating the feed components and the detergent.	53
4	Setup	55
4.1	Overview of the menus in the setup	55
4.2	Language	56
4.3	Time/date	57
4.4	Machine	57
4.5	Equipment.	59
4.6	Identification	61
4.7	ID-chip	61
4.8	Stations.	61
4.8.1	Feed control	62
4.8.1.1	Internal stations controlled by the automatic feeder.	62
4.8.1.2	IFS-F(eeding stations)	63
4.8.1.3	IFS-compact unit for four feeding stations	65
4.8.2	IFS-concentrate stations	67
4.8.3	Scales	68
4.9	Terminal	68
4.10	Communication.	69
5	Device data	71
5.1	Checking and adjusting time/date.	71
5.1.1	Checking time/date	71
5.1.2	Adjusting time and date.	71
5.2	New installation.	72
5.2.1	New installation only of device data, plans, medicine prescriptions, animal data or transmitter numbers72	
5.2.2	New installation of everything	72
5.3	Restricted mode/ad libitum mode	73
5.4	Parallel mode	74
5.5	Station parameters	74
5.5.1	Feeding station	74
5.5.1.1	Draining time	75
5.5.1.2	Entering turn-on and turn-off delay	76
5.5.1.3	Pump start and stop.	76
5.5.1.4	Maximum speed.	77
5.5.2	Concentrate stations	77
5.5.3	Teat slider	77
5.5.4	CalfProtect.	77
5.6	Mixer.	78
5.6.1	Mixer draining	78
5.6.1.1	Mixer draining valve	78

5.6.1.2	Emptying via the teat	78
5.6.2	Mixer emptying	79
5.6.2.1	Mixer emptying according to time	79
5.6.2.2	Draining mode	79
5.6.3	OFF delay of the mixer	79
5.7	Milk values	80
5.7.1	Selecting the MP/milk mode or the MP-mode	80
5.7.2	Continue with MP / machine stop	80
5.7.3	Entering the dry matter	81
5.7.4	Activating milk expelling	81
5.7.5	Commuting to the single heating circuit	82
6	Calibration	85
6.1	Manual calibration of the foodstuff	85
6.1.1	Liquid components (water, milk, liquid additive, detergent).	85
6.1.2	Powder components (MP and powder additive)	87
6.2	Semi and fully automatic calibration of the feeding stations with peristaltic pumps	87
6.2.1	Semi-automatic calibration	87
6.2.2	Fully automatic calibration.	88
6.2.3	Calibrating at the feeding station.	88
7	Transmitter and animal management	91
7.1	Transmitter management	91
7.1.1	Basics	91
7.1.1.1	Identification process at the station	91
7.1.1.2	Correlation between transmitter and animal numbers	92
7.1.2	Entering the transmitter numbers	92
7.1.2.1	Reading in the transmitter numbers	92
7.1.2.2	Entering the transmitter numbers manually	93
7.1.3	Allocating the animal numbers	94
7.1.3.1	Continuous allocation of the animal numbers	94
7.1.3.2	Allocating the animal numbers on the basis of the transmitter numbers	94
7.1.4	Editing the transmitter or animal numbers.	95
7.1.4.1	Changing the transmitter number.	95
7.1.4.2	Changing the animal number.	96
7.1.4.3	Deleting the transmitter numbers.	96
7.1.5	Deleting the transmitter numbers of animals being canceled	96
7.1.6	Recalling the transmitter statistics.	97
7.2	Registering the animals	97
7.2.1	Registering the animals manually	98
7.2.2	Registering the animal automatically.	99
7.2.2.1	Deactivating the automatic registration	100
7.2.2.2	Registering only available transmitters automatically	100
7.2.2.3	Entering the transmitter numbers and registering the animals automatically.	101
7.3	Canceling the animals or animal groups.	102
7.3.1	Canceling an individual animal	102
7.3.2	Canceling the group	103
7.3.3	Canceling weaned animals	103
7.4	Transferring the animals.	103
8	Feeding	105
8.1	Functioning of the automatic feeder	105
8.1.1	Feed preparation.	105
8.1.2	Feed dispense.	105

8.1.2.1	Priority mode	106
8.1.2.2	Parallel mode (SynchroFeed)	106
8.1.3	Feeding regime	106
8.1.3.1	Restricted mode	106
8.1.3.2	Ad libitum-mode	108
8.1.3.3	Priority	108
8.1.4	Dispensing additional feed portions	109
8.1.4.1	Dispensing extra portions	109
8.1.4.2	MilkMaker-functionality	110
8.2	Changing the data of individual animals	111
8.2.1	Changing the group	112
8.2.2	Deviations of the feed quantity or feed concentration	112
8.2.3	Checking the milk ratio	113
8.2.4	Changing additive dispense	113
8.2.5	Changing the weight	113
8.2.6	Shortening or extending the total duration of feeding	113
8.3	Plans	114
8.3.1	Changing the feeding plans	115
8.3.2	Changing the concentration plans	117
8.3.3	Changing the milk ratio plans	119
8.3.4	Changing the plan for limitation of quantities	120
8.3.5	Changing the plan for maximum speed	122
8.4	Alarm levels	123
8.5	Additive dispense	126
8.5.1	Creating a medicine prescription plan	127
8.5.1.1	Selecting the dosage	127
8.5.1.2	Distribution	128
8.5.1.3	Dispenser	129
8.5.1.4	Duration of medication and additive quantity	129
8.5.2	Creating the electrolyte prescription plan	131
8.5.3	Programming additive dispense	131
8.5.3.1	Giving medicine to individual animals	132
8.5.3.2	Giving electrolyte to individual animals	133
8.5.3.3	Giving additive to a group	133
8.5.3.4	Changing additive dispense	135
8.5.4	Handling remaining portions	137
8.5.4.1	Blocking the remaining portions for individual animals	137
8.5.4.2	Blocking the remaining portions for animal groups	138
9	Cleaning	139
9.1	Settings	139
9.2	Mixer	140
9.2.1	Starting mixer cleaning automatically/time-controlled	141
9.2.2	Starting mixer cleaning manually	142
9.3	Heat exchanger cleaning (serial equipment with)	142
9.4	Circuit cleaning	143
9.5	Air (pulsating compressed air cleaning)	145
9.6	(Box) valve cleaning	146
9.7	Sponge cleaning	146
9.8	Rinsing the hose	148
10	Diagnostic	151
10.1	Checking the valves/motors	151
10.2	Checking the heating	152
10.3	Checking the sensors	152

10.4	Checking the stations	153
10.4.1	Feeding stations	153
10.4.2	Concentrate stations	155
10.4.3	Animal scales	155
10.5	Control	155
10.6	Version	157
10.7	Setup	158
10.8	Software	158
11	Animal control	159
11.1	Checking the complete animal group or specific animals	159
11.1.1	Checking feed consumption	160
11.1.2	Checking the feeding break-offs	162
11.1.3	Checking the feeding speed	162
11.1.4	Checking the visiting behavior	163
11.1.5	Checking the feeding day	163
11.2	Checking the entitled animals	163
11.3	Checking the alarm animals	164
11.4	Checking the animals with expiry messages	165
11.5	Checking the animals to which additive is administered	165
11.6	Checking newly housed animals	167
11.7	Checking double animal numbers	168
11.8	Checking the unknown transmitters	168
11.9	Checking the total consumption	169
12	Failures and warnings	171
12.1	Failures	171
12.1.1	CRC-error	171
12.1.2	Heating	172
12.1.3	Temperature too high	173
12.1.4	Heat exchanger not filled	173
12.1.5	Water shortage	174
12.1.6	Water meter	175
12.1.7	Mixer emptying	176
12.1.8	Heating	177
12.1.9	Boiler temperature sensor	178
12.1.10	Milk/circulation valve	178
12.1.11	Milk empty	179
12.1.12	Calibration	179
12.1.13	Supply electrode	179
12.1.14	ID-chip	180
12.1.15	Station/draining valve	180
12.1.16	IFS-version	181
12.1.17	Output error	181
12.2	Warnings	182
12.2.1	Identification	182
12.2.2	Incorrect ID	182
12.2.3	Double address	182
12.2.4	IFS-F(eeding station)	183
12.2.5	Motor F-station	184
12.2.6	IFS-C(oncentrate station)	184
12.2.7	Motor C-station	184
12.2.8	Scales (SC)	185
12.2.9	Water meter	185
12.2.10	Mixer emptying	185

12.2.11	Mixer sensor	186
12.2.12	Milk empty	186
12.2.13	Unknown transmitters	186
12.2.14	Calibration	187
12.2.15	Automatic calibration	187
12.2.16	Circulation pump	188
12.2.17	ID-chip	188
12.2.18	Detergent	188
12.2.19	Double animal number	188
12.2.20	Machine capacity	189
12.2.21	Database	189
12.3	Further failures and messages	189
12.3.1	Hand-held terminal	189
12.3.1.1	CAN bus off	189
12.3.1.2	CAN bus heavy	190
12.3.1.3	Waiting	190
12.3.1.4	Searching	190
12.3.2	Bootloader	191
12.3.2.1	Waiting for update	191
12.3.2.2	Flash programming	191
12.3.2.3	Starting program	191
12.3.3	Message when starting the automatic feeder	191
13	Care and maintenance plan / Routine tasks	193
13.1	Automatic feeder in operation	193
13.2	Shutdown of the automatic feeder and the peripheral devices	195
14	Check list for after-sales service	197
15	Accessories	201
16	Annex	203
16.1	Menu overview	203
16.1.1	Main menu (key)	203
16.1.2	Menu overview of the manual functions (key)	211
16.1.3	Menu overview of animal control (key)	212
16.2	EC-Declaration of Conformity as per EC Machines Directives 98/37/EC, Annex II A	216
16.3	Default feeding plans	217
16.3.1	Group A	217
16.3.2	Group B	217
16.3.3	Group C	218
16.3.4	Group D	218
16.3.5	Template for individual feeding plan	219
16.4	Basic principle of interval feeding	220
16.5	CAN-bus addresses	221
16.5.1	Default addresses	221
16.5.2	Template for individual allocation of addresses	222

1 Introduction

Dear customer, thank you for placing your trust in us and purchasing this automatic feeder.

- > Read this operating manual thoroughly and attentively before putting this automatic feeder into service. This is an important precondition for safe and trouble-free operation.
- > Keep this instruction manual always ready to hand and pass it on to the next user.
- > Correct operation and proper care and maintenance are the prerequisites for trouble-free functioning of the automatic feeder.



Note: Please consider the documentation of the peripheral devices, if required.

1.1 Safety instructions

- > Only qualified and authorized service personnel is allowed to install, operate and repair the automatic feeder.
- > In addition to the instruction manual, please follow any regulations for accident prevention in force in the operator's country as well as the rules of engineering practice for safe and expert working.
- > Incorrect inputs may cause harm to animals' health. Therefore, check whether all inputs are correct and the automatic feeder is running properly.
- > Constantly check your livestock and the functions of the automatic feeder. If the animals are not or insufficiently provided with feed by the automatic feeder, make sure to feed them elsewhere.

- > Remove any prominent parts from the animals' house (e. g. pipe ends), because collars with transmitters may get caught in them.
- > Make sure that a pipe disconnecter is installed on site. Pipe disconnectors are safety valves that prevent pollution of drinking water by backflow of non drinking water (such as e.g. rinsing water or milk).
- > Protect the machine and the cables from sunlight.
- > The machines are equipped with a power plug which is common in most of the countries within and outside of Europe. For those countries where another power plug is used, the standard power plug must be expertly replaced by a power plug which is prescribed by the regulations of the corresponding country.

1.2 Application

1.2.1 Intended use of the automatic feeder

- > The automatic feeder must be used exclusively for liquid calf feeding.
- > Exclusively commercially available milk powders and additives must be used.
- > The water used to prepare the milk powder feed must be food-grade.
- > Make sure that the microbiological composition of the milk being fed to the calves is immaculate. Otherwise, severe scours may be the consequence thus affecting animals' health.


1.2.2 Adverse use of the automatic feeder

Do not use the automatic feeder to feed e.g.:

- non commercially available milk powder.

- milk starting to turn sour if it is heated before being fed. This milk may curdle by heating, thus occluding the stainless steel coil of the heat exchanger.

1.3 Safety signs



Danger! Hazardous voltage! Electric shock hazard!

Do not touch any live parts, otherwise current will flow through your body. This may cause severe physical injury.

Turn off and lock out power before carrying out any kind of operations on the labeled parts.



Warning!


Automatic start-up!

Keep hands clear from the crushing danger area as long as parts can move. For cleaning, use the tools contained in the scope of delivery.


1.4 Information signs on the automatic feeder

Below you will find the description of each individual information sign located in or on the automatic feeder.


Reset the safety temperature limiter.



Guidelines for resetting the safety temperature limiter.




Remove the metal covering.




Push the red Reset button. Follow the instructions in this manual.

Cut off the power supply of the boiler.



Before removing the boiler, it is imperative to cut off power supply. To do so, loosen the clamps and pull the plug.

Do not spray wash the automatic feeder.



Wipe the automatic feeder only with a moist cloth. Never use a high-pressure cleaner or similar to clean the automatic feeder.

1.5 Icons used in this instruction manual

Below you will find the icons and abbreviations used in this instruction manual.



Warning: It is imperative to observe these instructions to prevent damages to the machine and the animals.



Caution: It is imperative to observe these instructions to prevent damages to the mechanical or/and other components of the automatic feeder.



Note and example: This icon references important information and additional explanations on how to operate the automatic feeder.



The text passages marked with this icon are only valid for the automatic feeder Compact.







The text passages marked with this icon are only valid for the automatic feeder Vario.



The text passages marked with this icon are only valid for the automatic feeder Vario with Farmer-equipment.



The text passages marked with this icon are only valid for the automatic feeder Vario with Profi-equipment.

-  The text passages marked with this icon are only valid if at least one feeding station of the automatic feeder is operated in the parallel feeding mode.
-  Option: A white plus on a black background signals the description of optional functions or equipments.
-  The text passages marked with this icon are only valid if the automatic feeder is operated as a Stand Alone.
-  The text passages marked with this icon are only valid if the automatic feeder Vario is connected to a feed computer.

1.6 Specific terms

In this chapter you will find an explanation of specific terms used in this instruction manual.

Service personnel

This term stands for electricity specialists trained on operating, servicing and repairing the automatic feeder and its accessories.

Electricity specialist

An electricity specialist is defined as a specifically trained person able to detect and avoid dangers which may arise from electricity.

1.7 Abbreviations used in this instruction manual

Abbreviation	Meaning
abs.	absolute
add. disp.	additive dispenser
B-ant.	B-antenna
C-station	concentrate station
circ. pump	circulation pump
cl. mixer	mixer cleaning
deterg. pump	detergent pump
dos.	dosage
drain. time	draining time
empty v. teat	empty via teat
F-station	feeding station
feed. speed	feeding speed
gr A (B)	group A (B)
gradient	gradient control
HE	heat exchanger
IV	interval
IFS-C	Intelligent Feeding Station for concentrate
IFS-F	Intelligent Feeding Station for feed
MP	milk powder
MAP	manual training pump
max.	maximum
min. temp.	minimum temperature
mixer drain	mixer draining valve
n.	not
No.	number
P	period or prescription
powd. motor	powder motor
rel.	relative
servo	servo control
SNTR	designation of IFS-compact unit
temp.	temperature
train. pump	training pump
w. add.	with additive
w. entit.	with entitlement
water bo.	boiler water
with add.	with additive
w.o. add.	without additive
w.o. entit.	without entitlement


1.8 Contact details of Förster-Technik

If you have further questions or need a specific advice, contact us directly at any time. Before calling us, please write down the information indicated on the rating plate (device type, device number) which is located at the left of the chassis, as well as the program version.


Our address:
Förster-Technik GmbH
Gerwigstraße 25
D-78234 Engen
fon: +49 / (0)7733 / 9406 - 0
fax: +49 / (0)7733 / 9406 - 99
info@foerster-technik.de
www.foerster-technik.de



1.9 Components

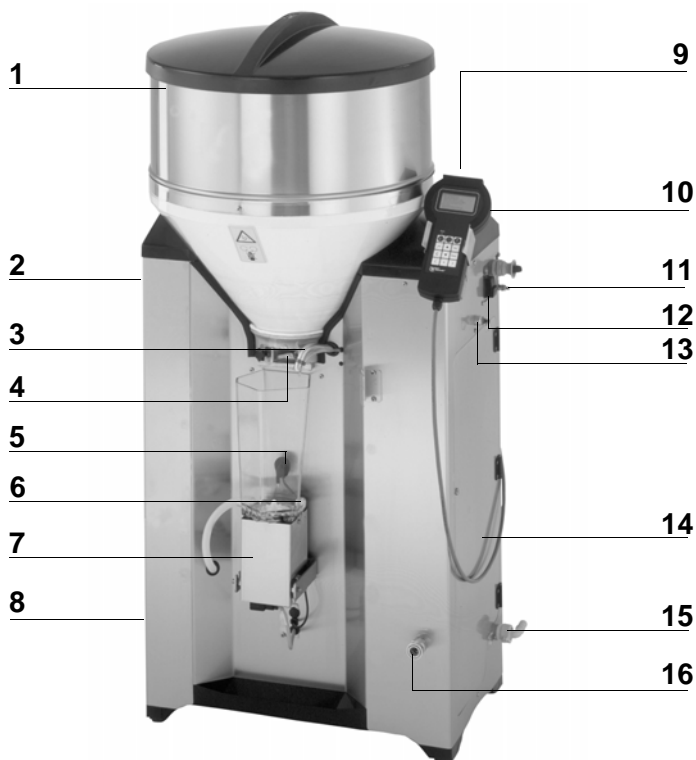1.9.1 Compact Combi

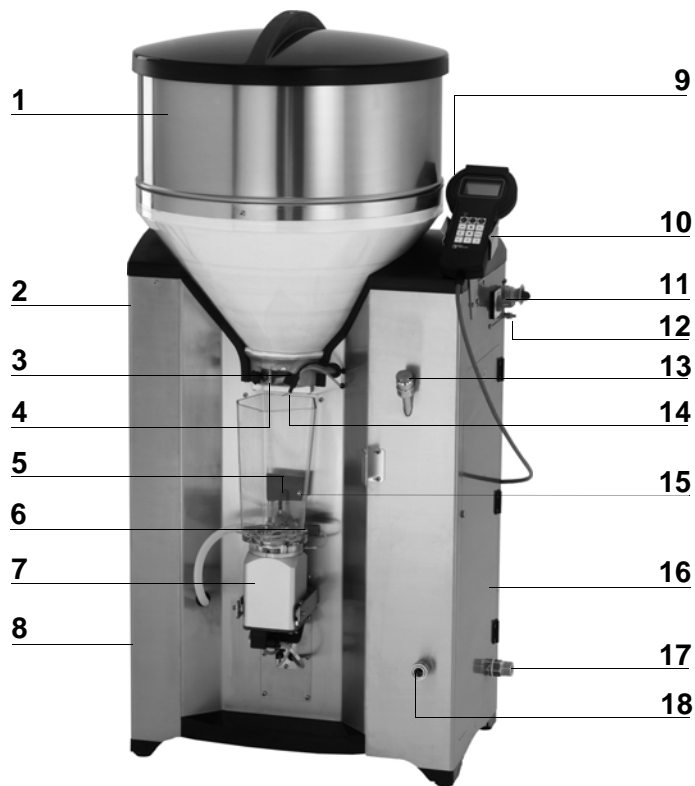


1 Milk powder hopper with top section	9 Rear of the chassis: control unit with boards
2 Rating plate (not illustrated)	10 Hand-held terminal
3 Milk outlet resp. Water outlet	11 Connection screw for equipotential bonding
4 Milk powder outlet	12 Control switch
5 Bar electrode	13 Nozzle for sponge cleaning
6 Temperature sensor	14 Right side of the chassis: water valve and milk valve, electronic heat exchanger, safety temperature limiter, milk pump
7 Mixer (mixer jar + mixer motor)	15 Water supply
8 Left side of the chassis: Box valve(s), training pump, ⊕ mixer draining valve, ⊕ detergent container, ⊕ detergent dosing pump	16 Milk supply

1.9.2  Vario Combi

1 Milk powder hopper with top section	10 Hand-held terminal
2 Rating plate (not illustrated)	11 Main switch
3 Milk resp. water outlet	12 Connection screw for equipotential bonding
4 Milk powder outlet	13 Nozzle for sponge cleaning
5 Bar electrode	14 Supply electrode
6 Temperature sensor	15 Spot electrode for 250 ml portions
7 Mixer (mixer jar + mixer motor)	16 Right side of the chassis: water valve and milk valve, electronic heat exchanger, safety temperature limiter, stainless steel milk pump
8 Left side of the chassis: Box valve(s), training pump, mixer draining valve,  detergent container,  detergent dosing pump	17 Water supply
9 Rear of the chassis: control unit with boards	18 Milk supply

1.9.3 CPU and relay power board

The CPU board and the relay power board are located at the rear (1) of the chassis.



Danger! Hazardous voltage! Electric shock hazard!

Solely service personnel is allowed to open and service the CPU and the relay power board.



1

1 Rear of the chassis for CPU and relay power board

(→ **Wiring diagram**)

1.9.3.1 Relay power board

On the relay power board are located among others:


- the transformer for the low voltage supply of the processor control,
- the relays and connecting terminals for external components as well as the microfuses,
- the interface for the PC,

-
- the toggle switch (right) to switch the heating of the milk powder outlet (vapour screen) on and off,
 - the toggle switch (left) to switch the heating cable and the mixer heating on and off.


(→ **wiring diagram**)

1.9.4 Heat exchanger with separate heating circuits for milk and water

1.9.4.1 Compact Combi

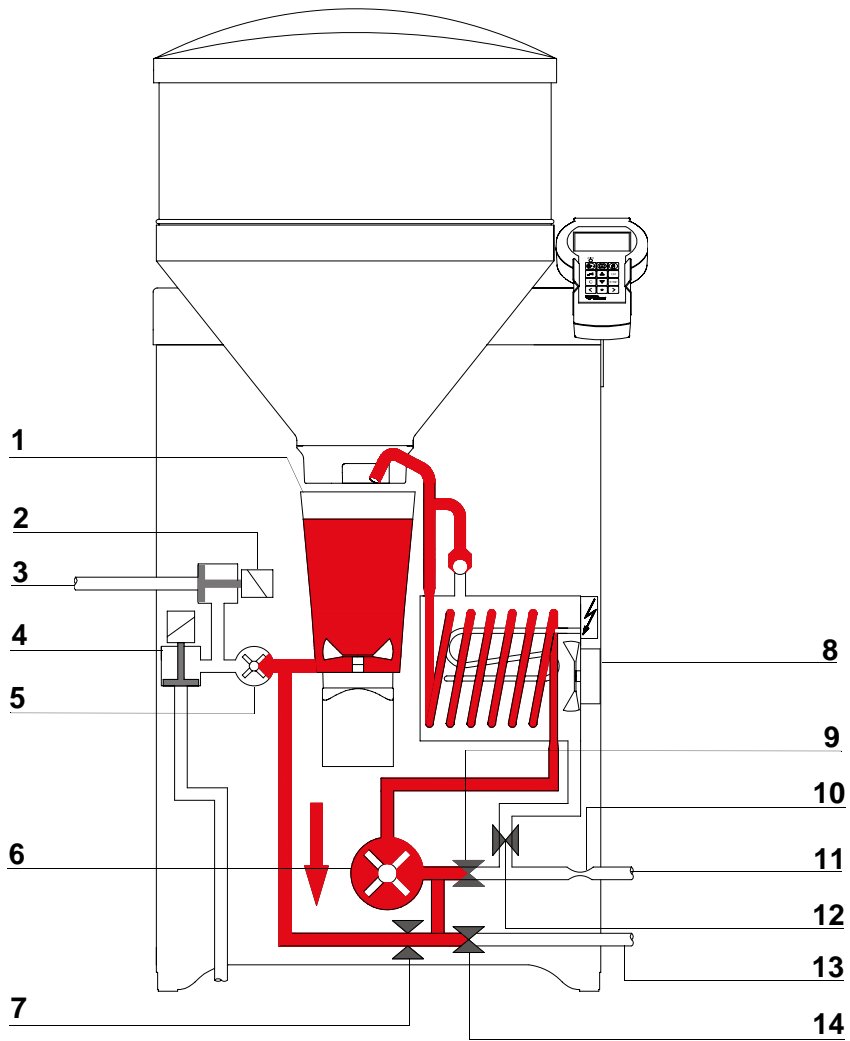

1 Mixer to mix up the feed components	8 Heat exchanger with stainless steel coil
2 Box valve	9 Water valve stainless steel coil
3 Hose connection between box valve and teat	10 Volume regulator
4 ●Mixer draining valve	11 Hose connection to the water pipe
5 Training pump	12 Water valve boiler
6 Milk pump for milk supply and dispense	13 Hose connection to the milk tank
7 Circulation valve	14 Milk valve

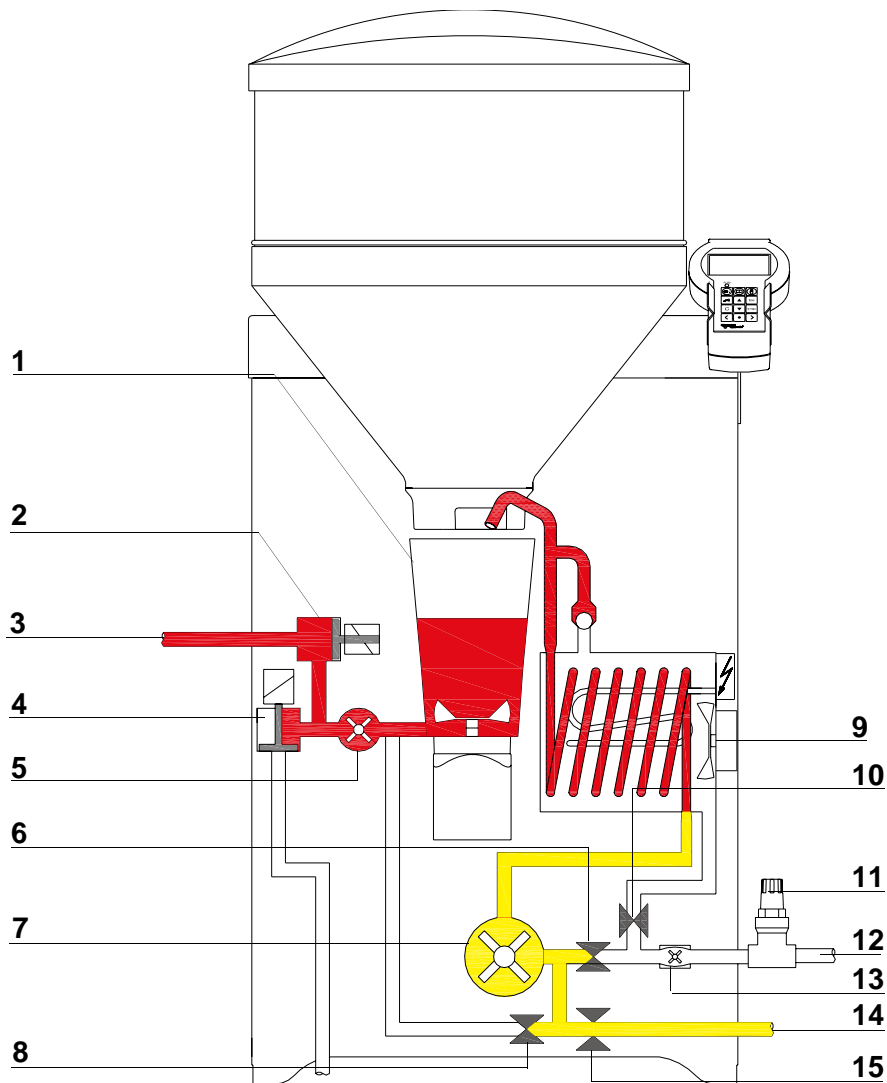1.9.4.2  Vario Combi

1 Mixer to mix up the feed components	9 Heat exchanger with stainless steel coil
2 Box valve	10 Water valve boiler
3 Hose connection between box valve and teat	11 Pressure reducer
4 Mixer draining valve	12 Hose connection to the water pipe
5 Training pump	13 Water meter
6 Water valve stainless steel coil	14 Hose connection to the milk tank
7 Stainless steel pump for milk supply and dispense	15 Milk valve
8 Circulation valve	

1.10 Technical data of the automatic feeder

Electrical connection

TAK5-VH1-50-F2 or TAK5-VH1-50-P2 (400 V)

VDW5-VH1-50-F2 or VDW5-VH1-50-P2 (400 V)

230 V / 400V / 3 / N / PE / 50 Hz / 16 A

or TAK5-VH1-55-P2 (240 V) (USA/Canada)

240 V / L1, L2 / Grd / 60 Hz / 30 A

TAK5-VH1-32-F2 or TAK5-VH1-32-P2

VDW5-VH1-32-F2 or VDW5-VH1-32-P2

230 V / L / N / PE / 50 Hz / 20 A

TAK5-VH1-30-P2 (Japan)

200 V / L1, L2 / Grd / 50/60 Hz / 20 A

TAK5-VH1-28-P2 (USA/Canada)

VDW5-VH1-28-P2

240 V / L1, L2 / Grd / 60 Hz / 15 A

TAK5-CH1-25 (400 V)

230 V / 400V / 3 / N / PE / 50 Hz / 16 A

TAK5-CH1-25 (230 V)

230 V / L / N / PE / 50 Hz / 16 A

TAK5-CH1-25 (240 V) (USA/Canada)

240 V / L / N / PE / 60 Hz / 16 A



Note: The data of the electrical connection are indicated on the rating plate at the left of the chassis!

Dimensions of the automatic feeder

Height:	126 cm
Width:	76 cm with closed lateral doors 115 cm with open lateral doors
Depth:	57 cm without additive dispenser Powder 66 cm with additive dispenser Powder

Weight

▼ ~80 kg

● ~74 kg

Water supply

½-inch hose with ¾-inch threaded hose coupling.

The local water pressure must be

▼ between 1 and 6 bar,

● between 2.5 und 6 bar.

Heat exchanger

Boiler capacity: approx. 7 L


● Capacity of the stainless steel coil: 0.25 L

▼ Capacity of the stainless steel coil: 0.5 L

Milk powder hopper

Capacity with top section: approx. 35 kg

Number of feeding stations and animals

	Compact	Vario
1 feeding station	max. 30 calves	max. 30 calves
2 feeding stations	max. 50 calves	max. 60 calves
4 feeding stations	-	max. 80 /  120 calves

1.11 Special danger areas

Special danger areas are:

- the milk powder outlet



Warning!

Automatic start-up!

Keep hands clear from the crushing danger areas as long as parts can move. For cleaning only use the tools contained in the scope of delivery. Never use your fingers!

2 Operation

2.1 Keyboard

In this instruction manual the keypresses are represented by the icons given below.



Control



Main menu




Manual functions




Training pump



Arrow Up/Arrow Down



Escape




Delete



Enter






Asterisk




Arrow Left/Arrow Right




2.2 Operating elements and menu structure



If you press ,  or , a menu will be displayed to which further menus may follow.

How to navigate within a menu is hereafter exemplified by  >

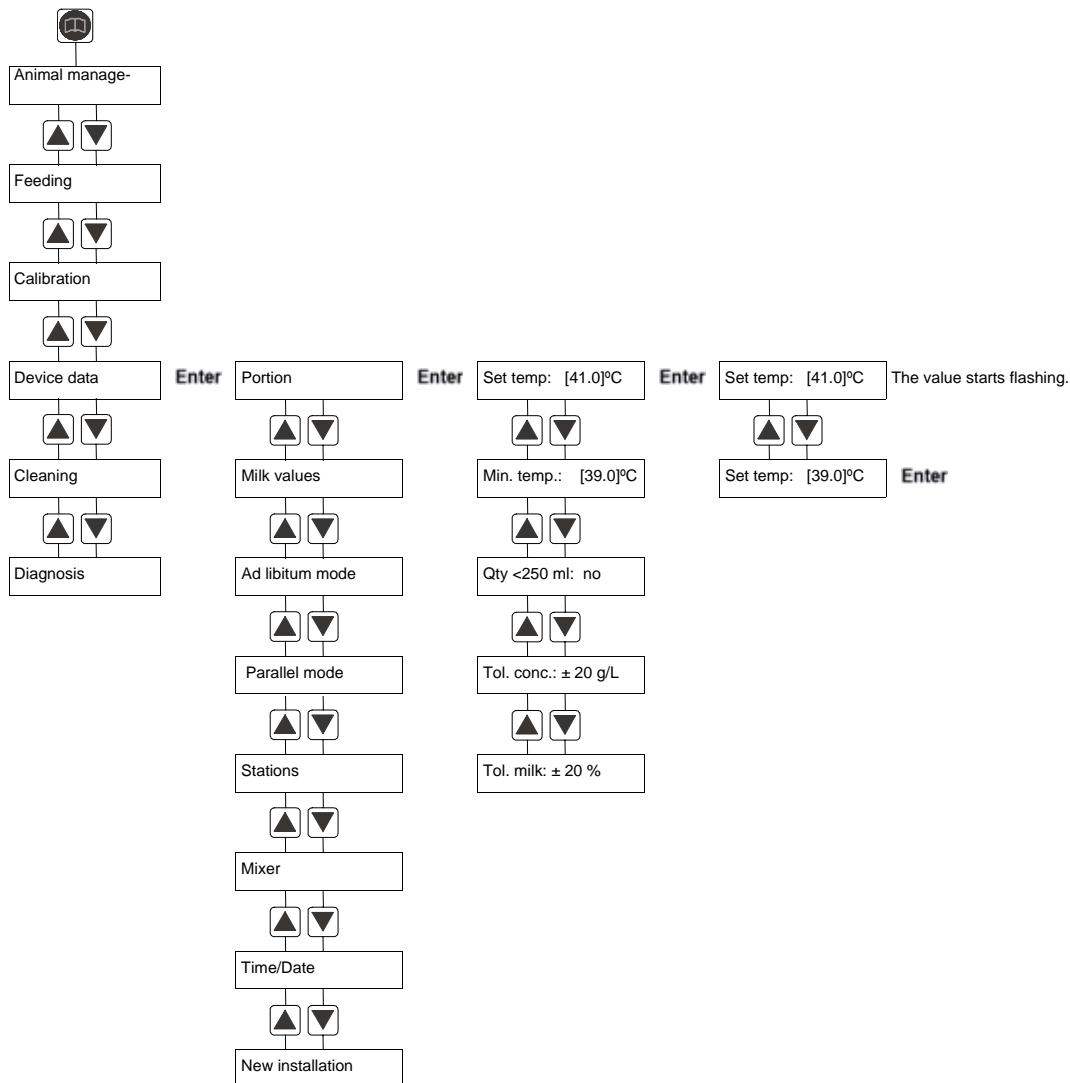
Device data > Portion > Set temp(erature).




Note: Some menus resp. menu items are not displayed because e.g. the automatic feeder is not equipped with a specific (optional) component or specific functions were not activated in the setup.

 **Example: Cleaning/day** is displayed in  > **Cleaning** > **Mixer** only if the automatic feeder is equipped with a mixer draining valve which has been previously activated in the setup.

2.2.1 Animal control

 If you press this key, the following menu will be displayed:

- entitled
- alarm
- plan over
-  additive (only displayed if an additive dispenser is connected)
- marked
- new
- double
- unknown
- all
- total consumption

```
animal control
▶ entitled:      4
  alarm:        4
  plan over:    3
```

2.2.2 Main menu



If you press this key, the following menu will be displayed:

- animal management
- feeding
- calibration
- device data
- cleaning
- diagnosis

```
animal control
▶ entitled:      4
  marked:       4
  all:          3
```

```
main menu
▶ animal management
  feeding
  calibration
  device data
  cleaning
  diagnosis
```

2.2.3 Manual functions



Press this key to manually activate specific functions of the automatic feeder:

- to dispense extra portions via the MilkMaker-function,
- to empty the mixer via the mixer draining valve, if available, or by means of the training pump via the teat,
- to select **milk: suck in?** if there is some air in the milk-supplying pipes. Press until the milk comes out bubble-free.
- to open the milk valve and actuate the milk pump,
- to fill the stainless steel coil of the heat exchanger with water via the milk pump,
- to fill the boiler with water,
- to actuate the mixer,
- to open the box valve(s) resp. to stimulate the hose pumps,
- to automatically fill the boiler of the heat exchanger with water.

```
manual function
▶ extra portion
  MilkMaker
  mixer:      empty?
  milk:      suck in?
  milk:      start?
  water HE:  start?
  water bo.: start?
  mixer:      start?
  F-station
  HE:        fill?
```

2.2.4 Training pump



Press this key to activate the training pump. The training pump is intended to easily accustom the animals to automatic feeding and to stimulate slowly drinking animals.

2.2.5 Arrow Up / Arrow Down



Press these keys to navigate within the menus.

Moreover, these keys allow you to change values and terms in the square brackets.

```
main menu
▶ feeding
  calibration
  device data
```

```
mixer
  draining mode:    no
  drain:           30 min
▷ OFF delay:      [3]sec
```

2.2.6 Enter



Press this key to

- open the menus,
- select figures / parameters within the square brackets,
- select figures and terms or confirm them when they start flashing,
- confirm the inputs.

2.2.7 Arrow right / Arrow left



Press Arrow Right or Arrow Left to move to equivalent menus. Equivalent menus are those within the angle brackets.


```
<boiler water>
▷ start?
  set qty:         500 ml
  runtime:         5.72 s
  pulses:          280
  date:            01.07.09
```

2.2.8 Asterisk






This key has two functions:

First function = Marking

Those animals to which particular attention should be paid, can be marked by . This is only possible when an animal number is displayed.

```
< 1331/A1> ↗ 6.0 L
till 16:40 0.0 L
▷ cons. %: 100 100
cons. L: 2.7 6.0
```


Press  or  to select the desired animal and press . An asterisk preceding the animal number indicates that this animal is marked.

```
<005000/90> 6.0 L/d
available: 0.1 L
▷ !cons. %: 0 100
cons. L: 0.0 6.0
* < 1331/A1> ↗ 6.0 L
till 16:40 0.0 L
▷ cons. %: 100 100
cons. L: 2.7 6.0
```

To delete marking press  next to the corresponding animal.

All marked animals can be viewed under  > **marked animals**.

Second function = Shift

Within the overview menu of the automatic mode press  to move from the

4-row


to the 8-row display and viceversa.

 In the 4-row mode the displayed characters are bigger.

```
automatic |
▶ F 1:‡ 3469 2.00 L
F 2:‡ 7261 1.25 L
C 1:- - - g
```

```
automatic |
▶ F 1:‡ 3469 2.00 L
F 2:‡ 7261 1.25 L
C 1:- - - g
entitled anim.: 2
alarm animals: 2
expire animals: 1
mixer cleaning: 17:00
```

2.2.9 C (=delete)



 Press this key to

1. delete failures and warnings,
2. take warnings from the overview menu of the automatic mode to the fore.


2.2.10 ESC(=Escape)

 This key has three functions:


First function

If you want to **go back to the automatic mode** after having carried out program settings in the offline-mode, press  until **automatic mode start?** is displayed. Then, press . The diode below **Auto** starts glowing, thus signalling the automatic mode.

Second function

Press  to access **the one higher level of the menu tree**. Likewise you can reaccess the overview menu of the automatic mode when the warnings are displayed.


Third function



Press  to **break off processes**, such as e.g. the calibration of powder or liquid feed components.



2.3 Operating modi

The automatic feeder knows two operating modi: the **automatic mode** and the **offline-mode**. In the automatic mode, the animals are fed. The offline-mode is used to carry out actions which cannot take place in the continuous operation, such as e.g. the calibration of feed components or the functional test of motors or sensors.



2.3.1 Automatic mode

Auto  The automatic feeder is operating in the automatic mode when the **diode below Auto is glowing**.

In the automatic mode you can move at any time to the menus of the keys  and  to check or change the settings/data. Meanwhile the **automatic mode is not broken off**.



If you press  or move to a menu that requires termination of the automatic mode (e.g. calibration), the message on the right is displayed. Press  to **quit the automatic mode**.

```
automatic mode
terminate?
```

To **go back to the automatic mode**, press  until the message on the right is displayed. Press  to confirm the input.



```
automatic mode
start?
```

2.3.2 Offline-mode

Auto  The **diode below Auto does not glow** when the automatic feeder is in the offline-mode. This occurs e.g. if you have selected the calibration menu or pressed . Every now and then the message on the right is displayed.

```
offline
▷ time:          15:11:59
  date:          30.07.05
```




Note: If the automatic feeder is offline, feeding will be broken off. If you want to go back to the automatic mode, press  until **automatic mode start?** is displayed. Then, press . The diode glowing below **Auto** signals the automatic mode.

2.4 Displays in the automatic mode

2.4.1 Display icons


Positioning marks

There are two different positioning marks:



- ▶ The **black positioning mark** indicates that by pressing  another menu is going to follow.
- ▷ If at the beginning of a line a **hollow mark** is displayed, settings can be changed or actions be started.

Angle brackets

< > Angle brackets indicate that you can select equivalent menus.


 **Example** taken from the calibration menu. Beside **boiler water** there are further menus, such as e.g. **MP**, **detergent** and **additive 1**.

```
<boiler water>
▷ start?
  set qty:      500 ml
  runtime:     5.72 s
  pulses:      280
  date:       01.07.09
```




To move among the offered menus, press  or . The currently selected menu is displayed in the first line within the angle brackets.

Square brackets






[] The square brackets contain figures or terms. To change them, proceed as follows:

1. Press . The value/term within the square brackets starts flashing.


```
mixer
  draining mode:  no
  drain:         30 min
▷ OFF delay:    [3]sec
```


2. Press  or  until the desired value/term is set. Press  to confirm the input.


```
mixer
  draining mode:  no
  drain:         30 min
▷ OFF delay:    [5]sec
```

 **Note:** If you keep  or  pressed, you will achieve the target value more rapidly. Once you have achieved the maximum or minimum value, the display will stop. Repress  or  to restart the counting mechanism.


Bar electrode free/covered


 This symbol is displayed when the mixer jar is filled (= the tip of the bar electrode is in the liquid).

 This symbol is displayed when the mixer jar is empty (= the bar electrode is free).

```
automatic 
▶ F 1: # 3469 2.00 L
  entitled anim. 2
  alarm animals: 0
```

Identification and feed consumption

 If this symbol is displayed next to the station number (here exemplified by => 1), an animal is being identified.

```
automatic 
▶ F 1: # 3469 2.00 L
  entitled anim.: 2
  alarm animals: 0
```

- If next to the antenna symbol ‡ a check mark , is displayed, an entitled animal is staying in the feeding station where it can consume its feed portion.
- If next to the antenna symbol ‡ a dash is displayed, the animal is entitled to feed but the animal-specific settings referring to concentration, milk ratio or additive dispense do not correspond to the current milk portion in the mixer jar. Therefore, at the moment the animal cannot consume the feed.
- A dash next to the station number indicates that no animal is being identified.

```
automatic |
▶ F 1:‡, 3469 2.00 L
  entitled anim.: 2
  alarm animals: 0
```

```
automatic |
▶ F 1:‡- 3469 2.00 L
  entitled anim.: 2
  alarm animals: 0
```

```
automatic |
▶ F 1:- - -1
  entitled anim.: 2
  alarm animals: 0
```

Plan tendency

- ↗ The Arrow Right next to the animal number indicates animal's current feeding phase.

The arrow shows

- top right: The feed quantity continuously increases (e.g. at the beginning of the feeding plan),
- rightwards: The feed quantity remains unchanged (e.g. in the middle of the feeding plan),
- bottom right: The feed quantity is continuously reduced (e.g. at the end of the feeding plan).

```
< 3469/A1> ↗ 6.0 L
  from 08:00 4.0 L
▷ cons. %: 0 100
  cons. L: 0.0 6.0
```

```
< 3469/A1> → 6.0 L
  from 04:00 5.5 L
▷ cons. %: 0 100
  cons. L: 0.0 6.0
```

```
< 3469/A1> ↘ 6.0 L
  from 04:00 5.5 L
▷ cons. %: 0 100
  cons. L: 0.0 6.0
```

Marking


- * An asterisk next to the animal number indicates that the animal has been marked.

```
*< 3469/A1> ↘ 6.0 L
  from 04:00 5.5 L
▷ cons. %: 0 100
  cons. L: 0.0 6.0
```

Alarms


! An exclamation mark next to the animal number indicates that this animal triggered an alarm. This may happen e.g. because the drinking speed is too low or the animal has not consumed enough feed.

```
*!< 3469/A1> 6.0 L
from 04:00 5.5 L
▷ cons. %: 0 100
cons. L: 0.0 6.0
```

The alarms can be deleted in the menus of  by pressing .

2.4.2 Displays in the operating mode of the automatic feeder

2.4.2.1 Restricted mode

Each individual feeding station provided by the automatic feeder is displayed in a line starting with F1 (= feeding station 1), F2 (= feeding station 2) etc. If an animal is detected in the corresponding station (can be recognized by the antenna symbol ‡ next to the station number), the animal number as well as the feed quantity that the animal is currently allowed to consume are displayed. You can press  in any line to get further details on the animal which is currently staying in the feeding station.

```
automatic
▶ F 1:‡ 3469 2.00 L
F 2:‡ 7261 1.25 L
entitled anim.: 2
alarm animals: 2
expire animals: 1
cl. mixer: 17:00
clean HE: 22:00
boiler: 42.1 °C
mixer: 39.5 °C
time: 18:14:54
date: 01.07.09
```

Further information

Below the lines referring to the available feeding stations, further information is displayed:

- the amount of animals, which are currently entitled to feed,
- the amount of animals for which an alarm was given,
- the amount of animals, which achieved the end of the feeding plan,
- the amount of registered animals,
- the time of the next mixer cleaning,
- the temperature of the water in the boiler,
- the temperature of the feed in the mixer,
- the current time,

- the current date.



If the connection to a station is disturbed, the text **warning** will be displayed instead of the animal number and the entitlement. To get further information, press in the line with the corresponding warning.

```
automatic |
F 1:‡ 3469 2.00 L
▶ F 2:- warning
```

2.4.2.2 Ad libitum-mode

Activation of the operating mode **ad libitum** is explicitly shown in the display. Please find below the same information as for the restricted mode.

```
automatic |
▶ F: ad lib-mode
...
```

2.4.3 Displays referring to the individual animal

To get detailed information about the animal, which is currently staying in the feeding station, press .

```
automatic |
▶ F 1:‡ 3469 2.00 L
F 2:- - -L
```

- The **top line** shows: the animal number, the feeding group, the feeding station, the plan tendency and the feed quantity, to which the animal is entitled today according to the plan.
- The information displayed in **line 2** varies depending on the animal's feed entitlement. The following options are possible:
 - The animal is entitled to feed. The display shows: The time as of which the animal is entitled to feed and the feed quantity saved till check time.

```
< 3469/A1> ↗ 6.0 L
from 08:00 4.0 L
▷ cons. %: 0 100
cons. L: 0.0 6.0
```



Example: The animal has saved 4.0 liters of feed since 8 a.m.

```
< 3469/A1> ↗ 6.0 L
from 08:00 4.0 L
▷ cons. %: 0 100
cons. L: 0.0 6.0
```

- The animal is not entitled to feed (here: till 1 p.m.).

```
< 3469/A1> ↗ 6.0 L
till 13:00 0.0 L
▷ cons. %: 0 100
cons. L: 0.0 6.0
```

- The animal saved more feed than it is allowed to consume all at once: If this animal consumes up to the maximum feed quantity, it will then be blocked for two hours.

```
< 3469/A1> ↗ 6.0 L
till 18:11 block
▷ cons. %: 0 100
cons. L: 0.0 6.0
```



Example: The animal saved 4 liters of feed, the maximum quantity is limited to 2 liters. If this animal consumes 2 liters of feed, it will be blocked.

- The animal saved more feed than it is allowed to consume all at once: If the animal does not consume the maximum quantity, the display will show the time up to which the difference between the consumed and the maximum quantity will be available.

```
< 3469/A1> ↗ 6.0 L
till 18:00 max. 1.5 L
▷ cons. %: 0 100
cons. L: 0.0 6.0
```



Example: The animal saved 4 liters, the maximum quantity is limited to 2 liters. The animal consumes 0.5 liters. This means that the animal is currently allowed to consume max. 1.5 liters.

- In **line 3:** The consumed quantity as a percentage (%) of the save-up quantity for today (left column) and yesterday (right column).
- In **line 4:** The feed quantity consumed till check time (consumed quantity in liters [L]) for today and yesterday.
- In **line 5:** The feed quantity to which the animal is entitled today and which the animal consumed yesterday according to plan.
- In **line 6:** The feed concentration for today and yesterday.
- In **line 7:** The milk ratio of the feed portion for today and yesterday.

3 Start-up



Note: Please consider the documentation of the peripheral devices, if required.



Note: When recommissioning the automatic feeder, proceed as described in the chapter „Start-up“.

3.1 Electrical connection provided by customers

- > The electrical connection to be provided by the customer must be installed by a qualified electrician.
- > Observe the local regulations and protective measures.
- > A fault-current circuit breaker (30 mA) in the power supply to be provided by the customer is compulsory in order to operate the automatic feeder.
- > The automatic feeder requires its own electrical connection.
- > The nominal voltage and nominal frequency must be observed. The nominal voltage specified on the name plate of the device must correspond to that of the mains supply.
- > Have overvoltage limiters installed in the main distributor if there is a risk of overvoltage.

Equipotential bonding



For animals' safety and to prevent electrical interferences, carry out equipotential bonding of all metal parts such as water pipe, feeding station, race-way and automatic feeder. At the right of the chassis, next to the power lead, is located the connection screw for the equipotential bonding of the automatic feeder. It is imperative to connect this screw to the local earth electrode via

a short and flexible copper conductor (minimum cross section: 4 mm²).

Lightning protection

As it is technically impossible to protect such an installation against lightning stroke separately, it is to the owner to install an adequate lightning protection (e.g. a lightning protection system for the entire building). We recommend to conclude a lightning protection insurance.

3.2 Locating the automatic feeder

- > Place the automatic feeder ideally in a dry location, if possible separate from the animal area, e. g. in the fodder storage or the milk room.
- > Protect the automatic feeder against dirt and flies, e.g. by means of the  large fly protection door.
- > Be sure to protect the automatic feeder against frost, e.g. by means of the  equipment against frost.

3.3 Mounting the protective grating of the powder hopper extension

The protective grating of the powder hopper extension prevents injuries caused by rotating tools which are located inside the powder hopper. Injuries may occur e.g. when filling the milk powder into the powder hopper.



1

1 Opening on the powder hopper extension to screw in a self-cutting screw

**Warning!**


Automatic start-up!

1. Remove the bags containing the small pieces and the hoses as well as the instruction manual from the milk powder hopper.
2. Mount the protective grating for the milk powder hopper extension.
3. Screw the three self-cutting screws into the holes intended for them.



Warning: During operation the protective grating must always be mounted.

3.4 Water supply and milk supply

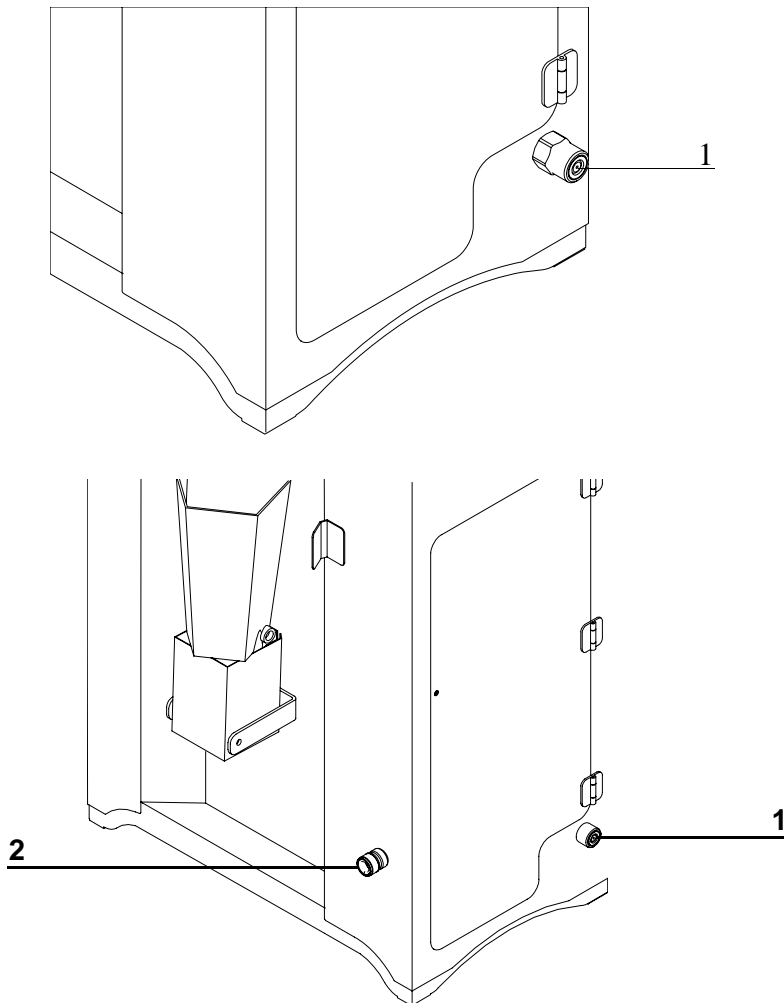

1	Water supply
2	Milk supply

3.4.1 Water supply

> Make sure that the water pressure is constant:

⚠ The water pressure must be at least 1 bar but it can also drop below 1 bar for a short time. The maximum pressure must not exceed 6 bar. If the water pressure drops below 1 bar for a long period or even permanently, make sure to install e.g. a device for pressure increase in order to achieve a higher water pressure.

ⓐ The water pressure must be at least 2.5 bar and must not exceed 6 bar. If 2.5 bar water pressure cannot be guaranteed, install the ⓑ water box.



Note: If you convert to the water box, the standard water valve of the automatic feeder is replaced by a low-pressure valve. Therefore, the water must unexceptionally be supplied to the automatic feeder via the water box.

> Use a separate water stop-cock for the water supply of the automatic feeder.



Note: If the water pipe has a small cross section, the water pressure may drop during operation. The same applies to a water pipe from which water is simultaneously extracted at different spots.



Caution: Drinking water quality is compulsory. Please consider that a high lime, iron, and manganese content may lead to premature wear. In that case, it is reasonable to install appropriate filter systems.

3.4.2 Milk supply

- > Place the milk tank ideally next to the automatic feeder.
- > Make sure that the hose connection between the milk tank and the automatic feeder is short. If a long hose connection is inevitable, use a hose with a larger cross section.
- > Install the milk hose on the bottom of the milk tank. Do not hang the milk hose topdown into the milk tank thus preventing the creation of air bubbles which may impair milk dosage.
- > If the milk pipe consists of several sections, make sure that the connection pieces are reliably tight. The same applies to the connections on the milk tank and the automatic feeder.

- > For hygienic reasons, avoid too large differences in cross sections.
- > Solely use connection pieces which are easy to clean.
- > Close the milk supply on the automatic feeder by means of the blind plug, if the automatic feeder solely operates in the water mode.



Note: Air-containing pipes, very long and thin, as well as thin-walled pipes prone to contract, may break-off the feeding mode or lead to unintentional change-over to the MP-mode.

3.5 Mounting the feeding station

- > Install an appropriate race-way in front of the feeding station. This prevents the animals from being pushed aside by other animals.
- > Mount the feeding station according to the enclosed manufacturers' instructions.

3.6 Connecting the antennas

3.6.1 Notes on how to mount the antennas

- > Mount the antennas according to the mounting instructions.
- > Keep the distance between the antenna and the transmitter as short as possible.
- >
- > Check the identification range of the antennas by means of the antenna test.
- > If an entitled animal is staying outside the feeding station but within the identification range of the antenna, it may happen that a feed portion is prepared which is not consumed by the

animal. Block the area next to the feeding station, if necessary.

If an antenna identifies two animals simultaneously, animal identification will be disrupted for both animals.


- > The distance between two antennas should be approx. 100 cm, in order to avoid overlaps of the identification range. In case of double or foreign identifications, you have to screen the antennas by means of grounded plates.




Caution: Lay out the antenna cables in such a way that they are not damaged by the animals.

3.6.2 Connecting the antenna cable to the motherboard

Only **service personnel** is allowed to connect the antenna cables.

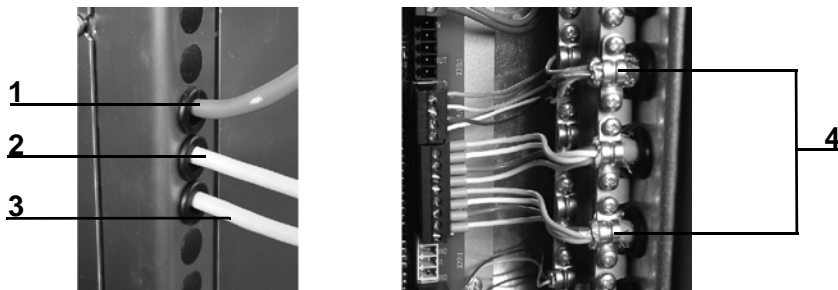

1 Cable of the hand-held terminal	3 Antenna cable of feeding station 2
2 Antenna cable of feeding station 1	4 Cable clamps



Danger! Hazardous voltage! Electric shock hazard.

Pull the mains plug.

1. Remove the casing cover of the control unit.

2. Below the cable grommet which is intended for the cable of the hand-held terminal, are located two more cable grommets. Push the antenna cables through these grommets into the control unit.
3. Connect the cables of the identification resp. the antenna to the motherboard according to the wiring diagram.
4. Secure the cable harness to the cable clamps.




Caution: To ensure grounding, approx. 1 cm of the shield (if available) must be clamped, too. Make sure that the shield does not overlie the cable insulation but the cable sheath.

5. Close the control unit.

3.7 Mounting the teat

1. The teat must be mounted in the feeding station 10 to 15 cm above the suction hose connection of the mixer and, as a result of this, 50 to 80 cm above calf's platform.

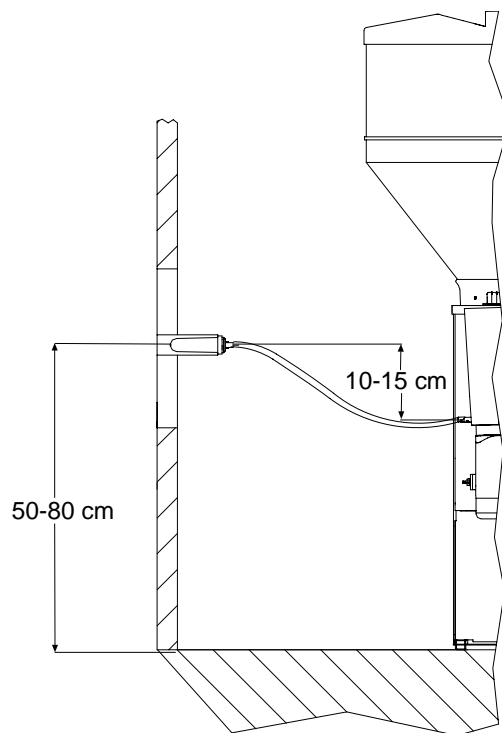

2. The suction hose should not be more than two meters long.
3. Secure the teat bracket with splash guard towards the bottom.
4. To avoid feed accumulation in the hose, make sure that the hose between the teat and the box valve (restricted mode) resp. the mixer jar (adlib-mode) does not sag.



Caution: It is imperative not to extend the hose that leads from the mixer draining valve to the drain!

3.8 Filling the heat exchanger

1. Plug in the mains plug and press the **C** control switch resp. turn the **V** main switch to the right to position **ON**.



Note: After you have switched the automatic feeder on, the program version of the hand-held terminal is briefly displayed before the automatic feeder starts carrying out a check routine. Do not press any key during these start routines.

2. The fault message on the right is displayed. Press .

```
failure
▶ HE not filled
```

3. Confirm **HE fill?** with . The boiler of the heat exchanger is automatically filled with water.

```
HE not filled
▷ HE:                fill?
  mixer:              empty?
  water bo.:          start?
```

3.9 Portion

In this menu you can carry out the settings for the feed portion:

- The target temperature of the feed in the mixer jar,
- The minimum temperature of the water in the boiler,
- The distribution pause,
- The portion dispense when entitlement less than 250 ml,
- The tolerance values for the concentration and the milk ratio.

```
portion
▷ set temp.:         [41.0]°C
  min. temp.:        38.0 °C
  qty <250 ml:       no
  tol. conc.:        20 g/L
  tol. milk:         0 %
```

3.9.1 Adjusting the target (set) and the minimum temperature

1. > **device data** > **portion** > **set temp.** resp. **min. temp.**
2. In **set temp.** enter the desired target temperature of the feed in the mixer jar (= mixing temperature).
3. In **min. temp.** enter the desired minimum temperature of the water in the boiler.

```
portion
▷ set temp.:         [41.0]°C
  min. temp.:        38.0 °C
  ...
```


	Set temperature	Min. temperature
Default value:	41 °C	38 °C
Allowed range:	10 °C to 44 °C	0 °C to set temperature minus 0.5 °C



Note: The values entered for the target and the minimum temperature are converted to the target and the minimum temperature of the boiler water. If the temperature of the boiler water falls below the minimum temperature, feed preparation will be broken off until the minimum temperature is achieved again.



Note: If you want to deactivate the minimum temperature parameter, in min. temp. enter **0 °C**.

Recommendations for temperature settings

The automatic feeder and the heat exchanger are designed in such a way that also milk powders with higher fat melting point can be used without any problems. Make sure that the feed temperature in the mixer jar is between 42 °C and 43 °C.

If you solely use whole milk or cold-soluble milk powders, a lower temperature of the feed in the mixer jar may be sufficient (e. g. 38 °C).



Warning: Too low feed temperatures may cause digestive troubles. Too high feed temperatures may lead to inflammations of the mucosa in the abomasum.




Note: the first feed portion is always mixed with slightly warmer water in accordance with ambient temperature.


3.9.2 **P** Setting the parameters for the parallel mode

3.9.2.1 **P** Portion dispense with entitlement less than 250 ml

For technical reasons the automatic feeder is not able to prepare portions less than 250 ml. If an animal has drunk up the mixer contents and the quantity to which it is still entitled is less than 250 ml, there are two possible scenarios:

- no portion is prepared for the animal (default setting: **no**)
- a 250 ml-portion is prepared for the animal. With it the animal achieves a 100 % consumption, but it obtains insignificantly more feed (in the case of station with valve) or a small quantity (250 ml - remaining entitlement of the animal in ml) remains in the mixer jar (in the case of station with hose pump).

1.  > **device data** > **portion** > **qty < 250 ml**

2. Select in **qty < 250 ml** either **yes** or **no** and confirm with .

```
portion
...
▷ qty <250ml:      [no]
...
```

3.9.2.2 **P** Tolerance values for concentration and milk ratio


If the SynchroFeed-function of the automatic feeder is used, the animals in the stations which are operated in parallel are simultaneously fed with the portion prepared in the mixer jar (see **8.1.2.2 Parallel mode (SynchroFeed), page 104**). If different concentration or milk ratio values are assigned to two animals fed in parallel, the tolerance value for concentration or milk ratio decides about whether both animals are allowed to drink simultaneously or not.

Tolerance for:	Concentration	Mik ratio
Default value:	± 20 g/L	± 20 %
Range:	± 0 to 50 g/L	± 0 to 100 %



Example: For an animal the feed concentration is 120 g/L. For another animal the feed concentration is 110 g/L. If the default setting for the tolerance value of the concentration (± 20 g/L) is maintained, this animal is allowed to drink together with the already drinking animal: The difference between the concentration value of the prepared feed (120 g/L) and the concentration value for the animal according to its feeding plan (110 g/L) is less than the set tolerance value (± 20 g/L).

Whereas, if the tolerance value had been 0 g/L, the animal – like for the priority mode – would have been fed only after the animal drinking first had consumed its complete portion.

1.  > **device data** > **portion** > **tol. conc.**

```
portion
...
▷ tol. conc.:  ±[20]g/L
tol. milk:    ± 20 %
```

2.  > **device data** > **portion** > **tol. milk**

3. In **tol. milk** enter the desired value and confirm with .

```
portion
...
▷ tol. conc.:  ± 20 g/L
▷ tol. milk:   ±[20]%
```

4. In **tol. conc.** enter the desired value and confirm with .

3.10 Vapour screen for powder outlet, mixer heating and equipment against frost


The heating element located at the milk powder outlet (vapour screen) prevents condensation.

Mixer jar heating prevents residual feed from cooling down.

The heating cable is activated as soon as the temperature falls below 3 °C. It protects e.g. the hose pipes, the training pump and the fittings against frost.

The heating cable becomes necessary when the automatic feeder is installed in an unprotected location or it is exposed to extreme cold.

Solely for service personnel:



Danger! Hazardous voltage! Electric shock hazard!

The automatic feeder must be free of voltage before opening the rear cover behind which are located the processor and the relay power board.

To do so, pull the mains plug.

3.11 Filling the milk powder hopper and the milk tank

3.11.1 Filling the milk powder into the powder hopper



Warning!

Automatic start-up!

Before carrying out any kind of operations on or inside the powder hopper, make sure that the automatic feeder is free of voltage. To do so, pull the mains plug.



Note: There is no warning when the powder hopper is empty! The automatic feeder will continue to feed without milk powder. This may effect that the animals are only fed with water, thus being not or insufficiently provided with feed. Only fill in milk powder that is suitable for calf feeding.



Caution: Make sure that no paper or other foreign material may access the powder hopper. The dosing mechanism may be damaged or the dosing accuracy may be impaired.

3.11.2 Filling the milk tank



Caution: The milk must always be clean. Straw, hay and other foreign material impair the functioning of the automatic feeder.



Note: With cow and flaked milk use a slow-running interval stirrer to avoid creaming of the milk. Continuously or fast running stirrers lead to creaming.



Warning: Those animals being fed with too fat milk may suffer from digestive troubles.

Cool the milk or preserve it with formic acid (20 - 30 ml of a 10 percent formic acid per liter of milk).



Caution: Do not use the automatic feeder to heat milk starting to turn sour. The stainless steel coil of the heat exchanger might get clogged.

3.12 Calibrating the feed components and the detergent






The feed components must be calibrated first in order to ensure the correct mixing ratio. The detergent must be calibrated, too.

4 Setup

In Setup you will find the program menus in which the manufacturer or the service personnel carried out all basic settings relating e.g. to the equipment of the automatic feeder. Verify the settings before starting to feed the animals.







Note: the manufacturer disclaims any liability for incorrect settings carried out by the user!

1. Press  and keep the key pressed when switching the automatic feeder on. After a short time the displays shows the message on the right:
2. If you want to change the settings, press .
3. Confirm the changes with .
4. To quit the setup, press  until the message on the right is displayed. Confirm with .

```
setup
▷ language:      [English]
  time/date
  machine
```

```
setup
terminate?
```


4.1 Overview of the menus in the setup

Language		English
Time / date		Time / date
Machine	Type	Powder
		Combi
		Milk
	Number	1-99 (= machine number, decimal)
	Address	2-FD (= CAN-address, hexadecimal)
	System	Interval
	Operating mode	SA / SM
	Animal number	 50 /  250
	HE capacity	 250 /  500 ml
	Boiler valve	Basic / brass
HE valve	Basic / brass	

Equipment	Mixer drain	Available yes / no?
	Training pump	Available yes / no?
	<input type="checkbox"/> Additive dispenser 1	Available yes / no?
	<input checked="" type="checkbox"/> <input type="checkbox"/> Additive dispenser 2	Available yes / no?
	<input type="checkbox"/> Detergent pump	Available yes / no?
	<input type="checkbox"/> Detergent sensor	No / internal / external
	<input type="checkbox"/> Circulation valve	HE / <input checked="" type="checkbox"/> valve / no
	<input checked="" type="checkbox"/> Air valve	Available yes / no?
	Circulation pump	Available yes / no?
	Temperature sensor mixer	Available yes / no?
	<input checked="" type="checkbox"/> Water meter	Available yes / no?
	<input checked="" type="checkbox"/> Supply electrode	Available yes / no?
	<input checked="" type="checkbox"/> Spot electrode	Available yes / no?
	<input checked="" type="checkbox"/> <input type="checkbox"/> MilkMaker	Available yes / no?
Heating	Activated	Yes / no
	Relay	<input checked="" type="checkbox"/> Mechanical <input checked="" type="checkbox"/> Electronical
Identification	Type	Nedap / Tiris
	Squelch	0 to 255
ID-chip	Activated	Yes / no
	Read in?	
Stations	Feed	<Internal 1>, <internal 2>
		<IFS-F 1 .. 8>
		<IFS-F quadruple 1, 2>
	Concentrate	<IFS-C 1 .. 8>
		Allocation: [C-station 1 .. 8]
		Address: 51-60 Type: Standard
Animal scales	Unit 1 / 2: [available stations]	
Terminal	Address	1-FD (= CAN-address, hexadecimal)
Communication	PC	Serial / CAN
	Printer	No / serial / CAN

4.2 Language

Here you can choose one of the available languages for the user guidance of the automatic feeder.



4.3 Time/date

Check and rectify the time and date, if necessary.

```
time/date
▷ time:      [17:55:23]
  date:      29.04.09
```

4.4 Machine


Types

Three machine types are available:

- Powder: This machine type is able to feed MP/water mixtures.
- Combi: This machine type is able to feed fresh milk as well as MP/water mixtures.
- Fresh milk: This machine type is able to feed solely fresh milk.


```
machine
▷ type:[ Combi]
  ...
```



Note: If with Combi and Fresh milk feeders you intend to feed solely milk powder and water for a certain period of time, do **not** select the menu **Powder**, otherwise malfunctioning of the automatic feeder may occur. The liquid feed resp. the combination of liquid feeds to be fed must be selected solely in  **> device data > milk values**.

```
milk values
▷ [MP-mode]
```

Number

To make the programs UpdateManager and KalbManager access the software of the automatic feeder, the automatic feeder needs a number. The default number is 1.

```
machine
  type:      Combi
▷ number:    [ 2 ]
  ...
```



Note: If several automatic feeders are networked, make sure that a number is assigned only once.

Address

Each node of the CAN-bus system requires an address for clear identification purposes.



Note: Make sure that a number is assigned only once.



Note: If you select an address that has already been assigned, the message on the right will be displayed.

```
machine
  type:      Combi
  number:    1
  ▷ address: [10]
  ...
```

```
address
  already allocated!
```

Address ranges for CAN-nodes	
1-10	=> Hand-held terminal
11-20	=> Automatic feeder
41-50	=> IFS-feed control single
51-60	=> IFS-concentrate feeder
61-70	=> IFS-feed control quadruple

Operating mode

Do not change the preset value SA (= Stand Alone).

```
machine
  ...
  ▷ operating mode: [SA]
  ...
```

Here you select whether the automatic feeder is equipped with a heating and if so, the **heating relay** type. With here you must select **electronic**, with **mechanical**.

```
machine
  ...
  ▷ heating: [electronic]
  ...
```

HE-capacity

With 250 ml, with 500 ml must be set. The set value determines:

- The target quantity for the calibration of water HE and milk

```
machine
  ...
  ▷ HE-cap.: [500] ml
  ...
```

-
- The water quantity used to press the milk out of the stainless steel coil.

Water valve boiler and water valve HE

The factory-set values must remain unchanged.

4.5 Equipment

Here you can enter whether the automatic feeder is equipped with specific components or options.

```
equipment
▷ mixer drain:    [ yes]
...
```

Mixer draining valve

The content of the mixer can be drained all automatically via the mixer draining valve, if available.

Training pump

The training pump is available as standard. It facilitates animals' accustoming to the automatic feeder. With the training pump you can also empty the mixer jar via the teat.

```
equipment
  mixer drain:    yes
▷ feeding pump:   [ yes]
  add. disp. 1:   yes
  add. disp. 2:   yes
  deterg. pump:   yes
  de. sensor:     rod
  circ. valve:    HE
  air valve:      yes
...
```

◆ Additive dispenser 1/2

Up to two additive dispensers can be connected to the automatic feeder.

◆ Detergent pump

If the automatic feeder is equipped with the detergent pump, during the cleaning cycle detergent can be added all-automatically.

◆ Detergent sensor

If the level of the liquid in the detergent container is detected by a floater which is located at the level rod, enter **rod**. Whereas, if the detergent sensor is integrated in the piping for the detergent, select **external**.

Circulation valve

Here you can select:

- HE (= heat exchanger): This valve is part of the standard equipment of all Profi models. For all Farmer models it is an option. It facilitates all-automatic heat exchanger cleaning.
- **VF** Valve: The **cleaning valve** is part of the standard equipment of all Farmer models. It facilitates all-automatic cold water cleaning of the box valves.

V **+** Air valve

The air valve is part of the compressed-air cleaning system.

Mixer sensor

The sensor in the mixer continuously records the temperature of the feed in the mixer jar. If the temperature does not comply with the target value, the boiler heating will be readjusted. This means that the animals are always fed with the desired temperature - irrespective of the season.

equipment	
...	
▷ air valve:	[no]
circ. pump:	yes
mixer sensor:	yes
water meter:	yes
supply el.:	yes
spot el.:	yes
MilkMaker:	no

Circulation pump

The circulation pump ensures that the heat of the boiler water is rapidly and uniformly transferred to the liquid in the stainless steel coil.

V Water meter

The factory-set value (**yes**) must remain unchanged.

Supply and spot electrode

V The setting referring to the supply and the spot electrode must be **yes**.

C The setting referring to the supply and the spot electrode must be **no**.

MilkMaker

If the automatic feeder is equipped with an optional MilkMaker-dosing unit, larger milk quantities can be prepared and pumped into a container or a transport unit (e.g. a MilchMobil).

4.6 Identification

Type

Here you can enter the identification system in accordance with the identification system of the sales partner.

```
identification
▷ type: [Nedap]
  squelch:          180
```

Squelch

Via the Squelch value you can adjust the input and reading sensitivity of the identification. The higher the entered value, the smaller the identification range.

4.7 ID-chip

Before the automatic feeder Vario is delivered, all Setup settings are unchangeably stored on the ID-chip. Therefore, the primitive state of the setup can be restored at any time, e.g. if you accidentally changed a setting or had to replace the CPU board.

```
ID-chip
▷ activated:      [ yes]
  read in?
```

 In the line **activated** you must select **yes**.

 The automatic feeder Compact is not equipped with an ID-chip. Therefore, in the line **activated no** must be selected.

To transfer the **data from the ID-chip to the CPU board**, in **read in?** press .

4.8 Stations

In the menu **stations** you can activate additional feeding or concentrate stations and determine the accessories which may be available for them. The Compact and Vario feeders are equipped as standard with one box valve for one feeding station.

```
stations
▶ feed
  concentrate
  animal scales
```

4.8.1 Feed control

4.8.1.1 Internal stations controlled by the automatic feeder

Ⓢ The Compact is designed for connection of max. two feeding stations. The two internal controls required for that are part of the standard equipment of the automatic feeder.

Ⓥ With the Vario both internal controls are also available and useable. In addition, further stations can be controlled as so-called IFS-stations (see **4.8.1.2 IFS-F(eeding stations)**, page **63**).

Select the internal control to be allocated.

Allocation

In **allocation** select the feeding station which is to be allocated to the internal control.

```
F-stations
▶ internal (device)
  IFS-F single
  IFS-F quadruple
```

Options

In **options** select whether a gradient or servo control is connected.

```
<internal 1>
▷ allocation: [station 1]
  options:      none
  teat slider:  no
```

Teat slider

If the station is equipped with a teat slider, select **teat slider closed** resp. **open**. **Closed** means that the teat slider remains closed until an entitled animal enters the feeding station. If the animal has no feed entitlement anymore, the teat slider will close again. **Open** means that the teat slider remains open until a non-entitled animal enters the feeding station. After an entitled animal has entered the station and consumed its feed, the teat slider will close and open again when an entitled animal enters the station resp. opening time has lapsed.

4.8.1.2 IFS-F(eeding stations)

To the Vario up to eight feeding stations can be connected. However, for the third to eighth station, the automatic feeder has no own control anymore. Therefore, for the control of these (external) feeding stations you have to use so-called **Intelligent Feeding Stations (IFS)** as external peripheral devices. It is then up to these IFS-controls to identify the animals and dispense the feed at one or more external feeding stations. (If necessary, observe the documentation of the IFS-controls).

```
F-stations
  internal (device)
  ► IFS-F single
  IFS-F quadruple
```

Allocation

In line **allocation** select the feeding station which is to be allocated to the IFS-feed control.

```
<IFS-F 1>
  ► allocation: [station 3]
  address:           41
  type:              parallel
  teat slider:      no
  CalfProtect:      no
  search?
```

Address

The IFS (feeding station) is part of the CAN-bus-system. Therefore, it requires an address for clear identification purposes.



Note: Within a CAN-bus system an address can be allocated only once. The default addresses are the following:
IFS-F 1, address 41,
IFS-F 2, address 42,
...,
IFS-F 8, address 48.



Note: If you select an address that has already been allocated, the message on the right will be displayed.

```
address
already allocated!
```

Station type

Here you select whether an animal which is claiming its portion at this IFS-feeding station is allowed to be simultaneously fed with other animals (**parallel mode**) or whether this animal has to wait until the calves at the other stations have finished off feed consumption (**priority mode**).

Options and test slider


see **4.8.1.1** Internal stations controlled by the automatic feeder, page **62**

CalfProtect

If the Intelligent Feeding Station is equipped with CalfProtect, select **yes**. The gate closes automatically as soon as an entitled animal enters the station.

Search?

To facilitate data transfer between the automatic feeder and the IFS-feeding station, the selected CAN-bus-address must be transferred to the IFS.

1. Activate the **search mode** at the IFS. To do so, briefly push the **S5 button** located on the motherboard of the IFS (see wiring diagram of the IFS in the annex of this instruction manual). The green LED (ST1) next to button flashes (ten times per second).
2. In **search?** press .
3. If the IFS is detected on the CAN-bus, the address will be transferred. The message on the right will be displayed. The green LED (ST1) of the IFS-motherboard does not flash anymore.

```
IFS-F single
is being searched!
```

```
IFS-F single
found!
```



Note: If you have activated the **search mode** by mistake, repress the button S5. The search-mode will **be terminated**.



Note: The IFS-control described above is able to provide **just one single feeding station**. If you intend to use the IFS-control for several stations at the same time, the quadruple compact unit described below must be used.

4.8.1.3 IFS-compact unit for four feeding stations

Beside the IFS-controls for single feeding stations described in the previous chapter, also an IFS-compact unit able to provide four feeding stations at the same time thanks to four integrated hose pumps is available. This compact unit has been specifically designed for big farms.

```
F-stations
  internal (device)
  IFS-F single
  ► IFS-F quadruple
```

Pump 1 to 4

All four pumps of the IFS-compact unit must be allocated and configured individually in a separate submenu. Move to the pump which you would like to configure (e.g. **pump 1**) and press .

```
<IFS-F quadruple 1>
  ► pump 1: [station 1]
  pump 2: [station 2]
  pump 3: [station 3]
  pump 4: [station 4]
  address:      63
  search?
```

Pump allocation

- In the line **allocation** select the feeding station that has to be allocated to the corresponding pump of the IFS-compact unit.

```
<pump 1>
  ▷ allocation: [station 3]
  teat slider:      no
  CalfProtect:      no
  leakage sensor:   no
```

Equipment of the stations

- **Teat slider:** see 4.8.1.1 Internal stations controlled by the automatic feeder, page 62
- **CalfProtect:** If the Intelligent Feeding Station (IFS) is equipped with CalfProtect, select **yes**. The gate will automatically close as soon as an entitled animal enters the station.




Note: For each station of the IFS-compact unit either the teat slider or CalfProtect can be activated. Both devices cannot be simultaneously used for one station.


- **Leakage sensor:** Via the leakage sensor it is possible to detect leakage of the hose of the peristaltic pump. If your IFS-compact unit is equipped with a leakage sensor, here select **yes** and confirm with .

Address


The IFS-compact unit is integrated into the CAN-bus-system. Therefore it requires an address for clear identification purposes.

 **Note:** Within a CAN-bus system an address can be allocated only once. The default addresses are the following:
 Quadruple IFS-compact unit 1 = address 61,
 Quadruple IFS-compact unit 2 = address 62.

```
<IFS-F quadruple 1>
  pump 1:  [station 1]
  pump 2:  [station 2]
  pump 3:  [station 3]
  pump 4:  [station 4]
  ▶ address:      63
  search?
```

 **Note:** If you select an address that has already been allocated, the message on the right will be displayed.

```
address
already allocated!
```

 **Note:** The IFS-compact unit has one unique CAN-address but it provides 4 stations. The individual controls of the compact unit are designated as IFS4 1/1, IFS4 1/2, IFS4 1/3 and IFS4 1/4 (first compact unit) resp. IFS4 2/1, IFS4 2/2, IFS4 2/3 and IFS4 2/4 (second compact unit).

Search?

To facilitate data transfer between the automatic feeder and the IFS-compact unit, the selected CAN-bus address must be transferred to the IFS-compact unit.

1. Activate the **search mode** at the IFS-compact unit. To do so, briefly push the red, round **search button** on the motherboard of the IFS-compact unit. The green LED (H4) flashes (10 times per second).
2. In **search?** press .
3. If the quadruple IFS-unit is detected on the CAN-bus, the address will be transferred. The message on the right is displayed. The green LED (H4) on the motherboard of the IFS-compact unit stops flashing.

```
IFS-F quadruple
is being searched!
```

```
IFS-F quadruple
found!
```



Note: If you have activated the **search mode** by mistake, repress the red button. The search mode will be **terminated**.

4.8.2 IFS-concentrate stations

Here you can configure the concentrate station(s). Up to four concentrate stations per automatic feeder can be connected.

```
stations
  feed
  ► concentrate
  animal scales
```

Address

In the line **allocation** select the concentrate station which has to be allocated to the IFS-concentrate control.

Address

The IFS (concentrate feeder) is part of the CAN-bus system. Therefore it requires an address for clear identification purposes.

```
<IFS-C 1>
  ► allocation:[station 1]
  address:           51
  type:              standard
  search?
```



Note: Within a CAN-bus system an address can be allocated only once. The default addresses are the following:

IFS-C 1 (= concentrate station 1): address 51

IFS-C 2 (= concentrate station 2): address 52

...

IFS-C 8 (= concentrate station 8): address 58



Note: If you select an address that has already been allocated, the message on the right will be displayed.

```
address
  already allocated!
```

Type

Here you can select the concentrate feeder type.

Search?

Please refer to the previous chapter **IFS-feed controls**.

4.8.3 Scales

Here you can configure the scales which are connected to the automatic feeder. Up to twelve scales controls per feeder can be connected and each control is able to control two animal scales.

```
stations
  feed
  concentrate
  ► animal scales
```

Unit 1 and unit 2

In the line **unit 1** select the feed or concentrate station to which the first weighing unit of the scales control has been connected. Same procedure for **unit 2**, if necessary.

```
<scales control 1>
  ► unit 1:      [F-st. 1]
  unit 2:      [C-st. 1]
  address:      21
```

Address

The scales control is part of the CAN-bus system. Therefore, each scales control requires an address for clear identification purposes. This address is defined on the board of the scales control via the DIP-switch (→ **Instruction manual of the half-body scales**).



Note: Within a CAN-bus system an address can be allocated only once. The default addresses are the following:

Scales control 1 = address 22

Scales control 2 = address 22

...

Scales control 8 = address 28



Note: If you select an address that has already been allocated, the message on the right will be displayed.

```
address
  already allocated!
```

4.9 Terminal

Address

The hand-held terminal is part of the CAN-bus system of the automatic feeder. Therefore it requires its own address. The default address is 1.

```
setup
  ...
  ► terminal
  communication
```



Note: Within a CAN-bus system an address can be allocated only once.

```
terminal
▷ address:          [1]
```

4.10 Communication

PC

If you want to connect a PC to the automatic feeder, here you can select whether your PC shall exchange the data with the automatic feeder via a serial or a CAN-interface (via the Förster-gateway). If you want to use the institute program, which is intended to record the data relating to animals' visits, in **institute** select **yes**.

```
setup
...
▶ communication
```



Note: If you want to update the control program of the automatic feeder by means of the update set, basically here **serial** must be selected.

```
communication
▷ PC:                CAN
  institute:         no
  printer:           [ no]
```


Printer

- Serial: Select this option if a commercially available printer is connected to the automatic feeder via a serial interface.
- CAN: Select this option if the print data have to be transferred via the CAN-bus.

```
communication
  PC:                serial
▷ printer:           [ no]
```


5 Device data

Device data contains the following submenus.

- **Portion** (see Start-up)
- **Milk values**
- **Ad libitum mode**
- ** Parallel mode**
- **Stations**
- **Teat slider**
- **CalfProtect**
- **Mixer**
- **Time/date**
- **New installation**

```
device data
▷ portion
  milk values
  ad libitum mode
  parallel mode
  stations
  mixer
  time/date
  new installation
```

5.1 Checking and adjusting time/date


At start-up you must first of all check and, if necessary, change the time and the date.

5.1.1 Checking time/date

Auto In the automatic mode the time and the date are displayed.

```
automatic 
...
time:      14:29:39
date:      29.04.09
```

5.1.2 Adjusting time and date

1.  > **device data** > **time/date**
2. In the menu **time** enter the hours first. Press to move to the minutes and the seconds.
3. In the menu **date** proceed as with **time**.

```
time/date
▷ time:      [14:29:42]
  date:      29.04.09
```



Note: After you have changed the date, switch the automatic feeder off and then on to immediately carry out daily calculation.

5.2 New installation

When (re)commissioning the automatic feeder, the program (software) must be completely reset, i.e. redundant data and outdated inputs resp. misentries are removed from the memory.

Animal data are defined as e.g. group membership, housing date, feeding days and total consumption.


Device data are defined as e.g. feeding and concentration plans.

```
new installation
▷ device data
  plans
  medicine prescr.
  animal data
  transmitter
  CalfProtect
  everything
```



Note: When carrying out „new installation“ all the **animal data** as well as the **medicine** and **electrolyte prescriptions** are deleted, the **transmitter numbers** are set to zero and the **device data** are overwritten by default values.

5.2.1 New installation only of device data, plans, medicine prescriptions, animal data or transmitter numbers

1.  > **device data** > **new installation**
2. Press in **device data**.
3. Confirm **device data, new installation?** with .
4. With the menus **plans, medicine prescription, animal data** resp. **transmitter** proceed as with **device data**.

```
new installation
▷ device data
  ...
```

```
device data
new installation?
```

5.2.2 New installation of everything

1.  > **device data** > **new installation**
2. In **everything** press .
3. Confirm **everything new installation?** with .

```
everything
new installation?
```




Note: The settings in the setup of the automatic feeder are **not** changed when carrying out „new installation“.

5.3 Restricted mode/ad libitum mode


The automatic feeder operates as a standard in the restricted mode but it can also commute to the ad libitum mode.

Restricted mode

In the restricted mode the automatic feeder operates with animal identification, i.e. the animals are fed animal-specifically and in a restricted way.

Ad libitum mode

In the ad libitum mode the automatic feeder operates without animal identification. In the feeding mode a portion is prepared only when the bar electrode in the mixer jar is free (the mixer is empty). The box valves are constantly open.

1.  > **device data** > **ad libitum mode**
2. In **activated** select the desired setting.



Note: If the automatic feeder operates in the ad libitum mode for a long period of time, the box valves will heat up considerably as they are always open. Therefore, slip the suction hoses directly onto the nozzles of the mixer jar and remove the female power connectors from the box valves.

In the ad libitum mode the animals are not identified. Therefore, the function **automatic read in** of the transmitter numbers is **not** active.

```
device data
  portion
  milk values
▶ ad libitum mode
  ...
```

```
ad libitum mode
▶ activated:      [ no]
```

```
ad libitum mode
▶ activated:      [ yes]
conc.:           135 g/l
milk ratio:      100 %
add. 1:          0 g/l
add. 2:          0 g/l
```


If the ad libitum-mode is active, in the following lines you can select the **feed concentration**, the **milk ratio** and **additive dispense**.



Note: these settings are taken into account for the preparation of all feed portions.

5.4 **P**Parallel mode

If the automatic feeder is operating in the parallel mode, one or more stations are supplied by peristaltic pumps. To ensure a high dosing accuracy, these pumps are automatically calibrated once a day.

1.  > **device data** > **parallel mode**
2. In **autom. cal.** select whether such an automatic calibration has to take place.
3. In **cal. time** select the time of automatic calibration. The default time is midnight.

```
device data
...
▶ parallel mode
...
```

```
parallel mode
▷ autom. cal.: [ yes]
cal. time:      00:00
```



Note: If the calibration value determined via the automatic calibration deviates considerably from the value determined until now, the warning **autom. cal.** will be displayed (see **12.2.15** Automatic calibration, page 187).

5.5 Station parameters

5.5.1 Feeding station

In **feed** you can define the following parameters for each station:

- **Draining time**
- Turn-on delay
- **Turn-off delay**

```
<station 1>
▷ drain. time: [16]sec
  t. on delay:  0.2 sec
  t. off delay: 0.2 sec
  pump start:   0.7 sec
  pump stop:    0.7 sec
  max. speed:   70 %
```

- **Pump start**
- **Pump stop**
- **Maximum speed**




Note: Depending on the station type only some of these parameters can be applied resp. changed. The details are contained in the following table.

	Draining time	Turn-on delay	Turn-off delay	Pump start	Pump stop	Maximum speed
Default value:	16 sec	0.1 sec	0.4 sec	0.2 sec	0.4 sec	70 %
Range:	10 - 60 sec	0 - 2.0 sec	0 - 2.0 sec	0.2 - 9.9 sec	0.4 - 9.9 sec	20 - 100 %
Valve station (internal 1/2):	adjustable	–	–	–	–	–
IFS in the parallel mode:	–	adjustable	adjustable	adjustable	adjustable	according to max. speed plan
IFS with servo pump:	adjustable	adjustable	adjustable	adjustable	adjustable	adjustable
IFS with gradient control	adjustable	adjustable	adjustable	–	–	–

5.5.1.1 Draining time

The **draining time** begins when the bar electrode is not covered anymore after the last portion has been dispensed and ends when the corresponding box valve closes.


If the animals do not drink up the liquid in the mixer jar within the default draining time, you can extend draining time.

1.  > **device data** > **F-station** > **drain. time**
2. In menu **drain. time** enter the desired time.

```
<station 1>
▷ drain. time:  [16]sec
...
```

5.5.1.2 Entering turn-on and turn-off delay

The values for turn-on or turn-off delay may only be changed after consultation with service personnel. 0.1 s-steps can be keyed in.

1.  > **device data** > **F-station** > **t. on** resp. **t. off delay**
2. In menu **t. on delay** enter the desired time.
3. In menu **t. off delay** proceed as with **t. on delay**.


```
<station 1>
...
▷ t. on delay:  [0.2]sec
t. off delay:  0.2 sec
...
```

The pumps are switched on only after the turn-on delay has lapsed.

For those animals breaking off feed intake for a short time, the turn-off delay prevents the valves from switching on and off continuously or the peristaltic pumps from running up or shutting down.

5.5.1.3 Pump start and stop


The value for **pump start** determines the time within which a non-operative peristaltic pump runs up to its maximum speed. The value for **pump stop** determines the period of time needed by a peristaltic pump to shut down from its maximum speed to a non-operative state. Usually the values in the menus **pump start** and **stop** remain unchanged.

1.  > **device data** > **F-station** > **pump start** resp. **pump stop**
2. In **pump start** enter the desired period of time.
3. In **pump stop** enter the desired value.

```
<station 1>
...
▷ pump start:  [0.2]sec
pump stop:    0.2 sec
...
```

5.5.1.4 Maximum speed

The maximum speed of the pump must only be changed if the pump output is too high or too low.

1.  > **device data** > **F-station** > **max. speed**
2. In **max. speed** enter the desired percentage. This value refers to the maximum number of revolutions, which can be achieved with this pump.


```
<station 1>
...
max. speed:      [70]%
```



Note: The maximum speed of the peristaltic pumps in the parallel mode is determined via the maximum speed plan (see **8.3.5 Changing the plan for maximum speed**, page **122**).

5.5.2 Concentrate stations

The automatic feeder provides the opportunity to dispense two different concentrate types according to two different plans.

1.  > **device data** > **pump parameter** > **feed**
2. Select the desired concentrate station.
3. In **C-type** select the desired concentrate type.

```
<C-station 1>
C-type:          [1]
```

5.5.3 Teat slider

Here you can enter after which time the teat slider must be opened or closed.

```
teat slider
▷ close after:   [2]min
  open after:    2 min
```

Teat slider:	open	close
Default value:	2 min	2 min
Allowed range:	0 to 9 min	0 to 9 min

5.5.4 CalfProtect

If an entitled animal enters a feeding station which is equipped with CalfProtect, the grating gate closes as soon as the animal

```
CalfProtect
▷ open after:   [10]min
```

is staying within the identification. Here you can enter the time after which the gate is going to be opened.

Default value:	10 min
Allowed range:	0 (=deactivated) to 30 min



Note: You can change this value only if the station, which is equipped with CalfProtect, is controlled by an IFS-feed control or an IFS-compact unit.

5.6 Mixer

5.6.1 Mixer draining

For the sake of optimum feed hygiene, the milk residues in the mixer jar are usually drained off after a certain time.

5.6.1.1 Mixer draining valve

The best and easiest solution is to pump out the residues from the mixer jar via the mixer draining valve, if available.



Note: If a mixer valve is available, is determined in the setup of the automatic feeder (see **4.5 Equipment**, page **59**).

5.6.1.2 Emptying via the teat

If the automatic feeder is not equipped with a mixer draining valve, the cleaning water can be drained via the **teat** by means of the **training pump**. Alternatively you can also forego to pump out the residues.

1. > **device data** > **mixer** > **empty v. teat**
2. In **empty v. teat** select whether the mixer should be emptied.

```

mixer
▷ empty v. teat:  [yes]
draining mode:   no
drain:           120 min
OFF delay:      3 sec

```

```

mixer
▷ empty v. teat:  [yes]
...

```

5.6.2 Mixer emptying


5.6.2.1 Mixer emptying according to time

The automatic feeder allows you to select the time (minutes) after which the remaining portion in the mixer jar should be drained off. The emptying process is possibly followed by a draining process (see the following chapter).

```

mixer
  draining mode:      no
  ▷ drain:           [ 30]min
  OFF delay:         3 sec


```

1.  > **device data** > **mixer** > **drain**
2. In **drain** enter the desired period of time (minutes).

Default value:	30 min
Allowed range:	0 min (= deactivated emptying), 5 to 120 min

5.6.2.2 Draining mode

The **draining mode** helps to reduce the risk of suction hose freezing in winter. If the draining mode is active, after mixer emptying in order to pump off a remaining portion for all the available stations, the box valves will open for one minute to facilitate draining of the remaining liquid from the hoses. If the station is equipped with peristaltic pumps, these pumps start running for one minute.

1.  > **device data** > **mixer** > **draining mode**
2. Activate resp. deactivate the **draining mode** carrying the same name. The draining mode is deactivated as a standard.


```

mixer
  ▷ draining mode:  [ yes]
  drain:           30 min
  OFF delay:       3 sec

```

5.6.3 OFF delay of the mixer

Via the menu **OFF delay** you can change the runtime of the mixer. Whether and how long the mixer should continue to run, depends on the solubility of the milk powder.

1.  > **device data** > **mixer** > **OFF delay**
2. In **OFF delay** select the desired value.

```

mixer
  ...
  ▷ OFF delay:      3 sec

```


Default value:	3 sec
Allowed range:	3 to 12 sec

5.7 Milk values

If only fresh milk or fresh milk and milk powder must be dispensed via the automatic feeder, you have to carry out the appropriate settings in **milk values**.

5.7.1 Selecting the MP/milk mode or the MP-mode

If you would like to feed fresh milk and a mixture of water and milk powder, select **MP/milk mode**. If you would like to feed solely a mixture of water and milk powder, select **MP-mode**. If solely milk has to be fed, see **continue with MP**.

1.  > **device data** > **milk values**
2. In **MP/milk mode** resp. **MP-mode**, select the desired setting.
3. If you select **MP/milk mode**, the following lines are displayed:
 - **continue with MP**
 - **dry matter**
 - **drain**
 - **1-circle**

```

milk values
MP/milk mode
▷ continue with MP
dry matter:    135 g/L

```

5.7.2 Continue with MP / machine stop


When the milk tank is empty, the automatic feeder switches off or commutes to the MP-mode.

Continue with MP means that the automatic feeder commutes to the MP-mode when the milk tank is empty.



Note: Make sure that the powder hopper is always filled with milk powder!

Machine stop means that the automatic feeder switches off when the milk tank is empty.

1.  > **device data** > **milk values**
2. In **continue with MP** resp. **machine stop**, select the desired setting.

```
milk values
MP/milk mode
▷ [continue with MP]
dry matter:    135 g/L
```




Note: As soon as the milk tank is empty, the heat exchanger cleaning program will start running thus cleaning the heat exchanger.

5.7.3 Entering the dry matter

This value corresponds to the dry matter contents of whole milk. Generally the dry matter of whole milk is 120 g/L to 135 g/L.

The dry matter is automatically compared with the concentration plan each day anew. If the feed concentration is above the dry matter contents of the milk, milk powder will be dispensed into the mixer jar until the target concentration is achieved. If the concentration is below the dry matter contents of the milk, the milk or the milk/MP mixture is diluted with water.

Default value:	135 g
Allowed range:	5 g to 255 g

1.  > **device data** > **milk values**
2. Enter the desired value in **dry matter**.

```
milk values
MP/milk mode
continue with MP
▷ [dry matter]: 135 g/L
```

5.7.4 Activating milk expelling


When the automatic feeder operates in the **MP/milk mode**, a warm milk portion is always ready for demand in the stainless steel coil of the heat exchanger. This milk can be replaced by a

water portion after an adjustable time. The stainless steel coil is then filled with water, thus preventing the milk from thickening in the coil.

Default value:	1 hour
Allowed range:	0 to 3 hours



Note: To avoid that the milk stays too long in the stainless steel coil of the heat exchanger, the default value should remain unchanged.

1.  > **device data** > **milk values**
2. Enter the desired value in **drain**.



Note: If you select 0, **draining** is deactivated.

The idle time begins after the last milk portion has been dispensed.

```

milk values
...
dry matter: 135 g/L
▷ drain: [1 h]
1-circle: < 30 %


```

When an animal with feed entitlement enters the feeding station, the water portion in the heat exchanger is dispensed into the mixer jar and drained via the mixer draining valve. Only then the milk is dispensed into the mixer jar.

5.7.5 Commuting to the single heating circuit

As a rule the water is heated in the boiler of the heat exchanger and the milk in the stainless steel coil. If the milk ratio of animal's feed portion is too low, the automatic feeder automatically commutes to the **1-circle mode**. That means that the water as well as the milk are heated in the stainless steel coil of the heat exchanger, thus preventing the milk from staying too long in the coil.

Default value:	30 %
Allowed range:	30 % to 70 % as well as 100 %

1.  > **device data > milk values**
2. In **1-circle** enter the desired value.



Example: According to the milk ratio plan the current milk ratio of the feed portion of animal 1A is 30 %. If in **1-circle** you have entered 40 %, the automatic feeder will commute to the **single circuit** because the milk ratio has fallen below 40 %.



Note: In the majority of cases there is no need to change the default value.

```
milk values
dry matter: 135 g/L
drain:      1 h
▷ 1-circle: [< 40]%
```


6 Calibration



Note: Please consider the documentation of the peripheral devices, if required.

The automatic feeder must be calibrated first to ensure that the components water, milk, MP and ●additives are accurately dispensed and mixed. The ●detergent dosing pump and the peristaltic pumps must be calibrated, too.









Note: For calibration, keep the following objects at hand: A graduated cylinder with ml-scale for the calibration of **liquid feed components** (boiler water, HE water, milk, liquid additive and detergent); A scales accurate to gram for the calibration of **MP**; A precision scales for the calibration of powder additives (weighing accuracy: 0.1 g).

For calibration of the valve stations, the volume resp. the weight of all the foodstuff to be calibrated must be determined manually. Thereupon, each of the ●peristaltic pump stations - if available - at which the animals can be simultaneously fed, must be calibrated separately. The calibration process takes place semi or all-automatically.

6.1 Manual calibration of the foodstuff

6.1.1 Liquid components (water, milk, liquid additive, detergent)

Boiler water is intended to exemplify how to calibrate a liquid component.

1.  > **calibration** > **boiler water**
2. Hold an empty measuring vessel under the water/milk outlet.
3. Confirm **start?** with . The calibration process starts running. First the target value entered in Setup is displayed. Shortly afterwards, the display shows the flashing actual value.
4. Measure the collected quantity.
5. Enter the measured quantity in the line **actual** and confirm with . You will return to the calibration menu where the following is displayed:
 - the set quantity,
 - how long the water valve remained open during calibration,
 -  the pulses of the water meter (only with boiler water and HE water),
 - the date of the last calibration.
6. Repeat the calibration process to check the result.
7. Now also calibrate the components **HE water**, **milk**,  **additive** and  **detergent**. For the calibration of the remaining liquids, proceed as for the calibration of **boiler water**.

```
<boiler water>
▷ start?
  set qty:      500 ml
  ...
```


```
calibration
set:           500 ml
actual:       500 ml
```

```
calibration
set:           500 ml
actual:       485 ml
```

```
<boiler water>
▷ start?
  set qty:      500 ml
  runtime:     5.37 s
  pulses:      275
  date:        01.07.09
```

```
< HE water   >
▷ start?
  set qty:      500 ml
  ...
```



Note: After calibration of the additive, pay particular attention to the value displayed in the line **max. qty**. This value exactly corresponds to the quantity of this specific additive that you can administer at most (see **8.5.1.4 Duration of medication and additive quantity**, page **128**). If you enter a larger quantity, the message on the right will be displayed. If you confirm with , the **maximum quantity** will be automatically taken over.

```
runtime too long?
reduce quantity?
```

6.1.2 Powder components (MP and powder additive)

Calibrate the powder feed components as described in the previous chapter.




Note: If no precision scales is available for the calibration of powder additives, you have to repeat the calibration process several times in order to get a larger additive amount. Divide the measured quantity by the number of calibration processes and then key in the figure.

Repeat the calibration process in order to check the result.



6.2 Semi and fully automatic calibration of the feeding stations with peristaltic pumps

6.2.1 Semi-automatic calibration



Note: The peristaltic pumps must be calibrated only if they are used for  parallel feeding.

The semi-automatic calibration process of a station with peristaltic pumps is exemplified by **F-station 1**:

1.  > **calibration** > **F-station 1**
2. Confirm **start?** with . The semi-automatic calibration process starts running and a series of automated processes takes place.
3. After completion of the calibration process, the message on the right will be displayed.
4. Now also calibrate the other stations which are equipped with the peristaltic pumps.


```
<F-station 1 >
▷ start?
...
```

```
calibration
completed!
```

6.2.2 Fully automatic calibration

If required, the stations equipped with the peristaltic pumps can be all-automatically calibrated once a day (see **5.4 Parallel mode**, page **72**). If the calibration value determined via the automatic calibration differs considerably from the value determined so far, the calibration value until now will persist and the warning **autom. cal.** will be given. For each feeding station a tolerance value can be defined separately. This value determines the maximum percentage the value determined via the automatic calibration is allowed to differ from the calibration value until now in order to be still considered valid, thus being taken over as the new value.

```
<F-station 3>
start?
measured?
set qty:      500 ml
pulses:      110
▷ tolerance:  [15]%
date:        29.04.09
```

1.  > **calibration > F-station 3**
2. In **tolerance** enter the desired percentage of the tolerance value.

Default value:	15 %
Allowed range:	5 to 50 %



Note: If the value determined via the automatic calibration is undone, the warning **autom. cal.** will be given (see **12.2.15 Automatic calibration**, page **187**).



6.2.3 Calibrating at the feeding station

1. Remove the suction hose from the teat at the feeding station to be calibrated and hold the hose opening into the graduated cylinder.
2. Press the calibration button at the IFS, which is allocated to the feeding station. The feed is now dispensed via the suction hose into the graduated cylinder. Keep the button pressed un-

til feed dispense switches off automatically. The calibration button is located on the right of the control box.

3. Read the value of the dispensed feed quantity from the measuring lines of the calibration container.

 > **calibration** > **F-station 1**

4. Go to the menu **measured?** and press .
5. Use the arrow keys to enter the determined feed volume into the input box **actual**. Press  to confirm the input.
6. At the IFS-station repress the calibration button and check whether the set and the actual volume of the dispensed feed correspond.



Note: It is imperative that the suction hose out of which the feed flows into the graduated cylinder is completely filled, before you press the calibration button.

```
<F-station 1>
  start?
▷ measured?
  set qty:      500 ml
  pulses:      110
  tolerance:    ± 15 %
  date:        30.04.09
```


7 Transmitter and animal management


The menu **animal management** contains all the information about the management of the transmitter pool and of the registered animals.

```
main menu
▶ animal management
...
```

7.1 Transmitter management

7.1.1 Basics

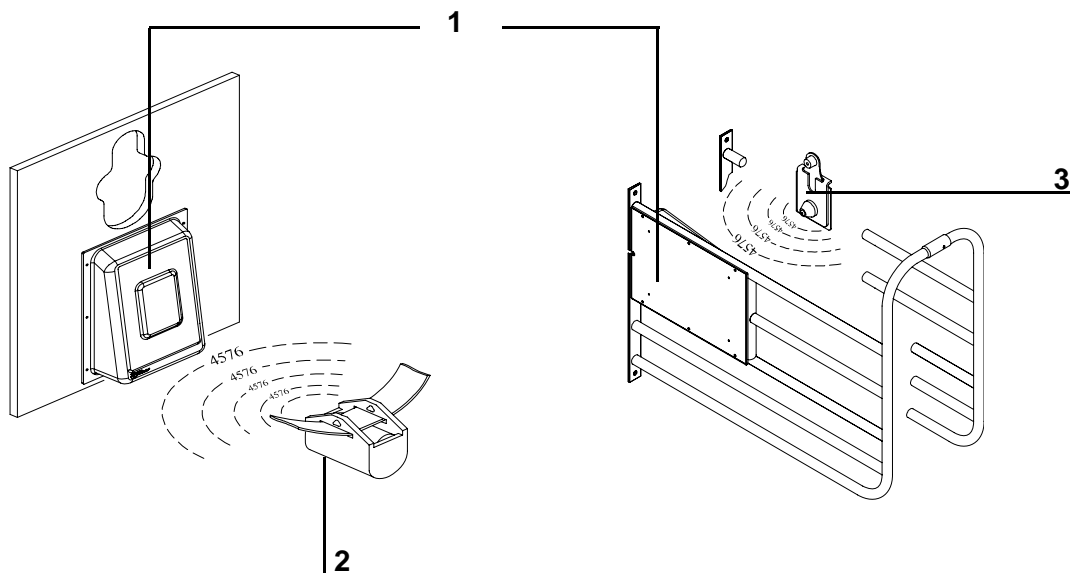

7.1.1.1 Identification process at the station



1	Antenna
2	Collar transmitter
3	Eartag transmitter

For identification purposes, each animal wears a collar with transmitter or an eartag with transmitter. The transmitter has a multi-digit number which in the majority of cases is additionally imprinted on the transmitter casing. This **transmitter number** is transferred from the transmitter to the antenna which is part of the feeding station.

7.1.1.2 Correlation between transmitter and animal numbers

The multi-digit transmitter number is not suited to rapidly locate individual animals. Therefore, beside the transmitter number also an animal number is allocated to each animal. The animal wears this animal number on its collar or this animal number is applied on the eartag in a clearly legible way. To the animals up to  50 resp.  250 different animal numbers with maximum four digits can be allocated.

7.1.2 Entering the transmitter numbers

At start-up of the automatic feeder the available transmitters must be entered into the system for once. Thereby an animal number with maximum four digits is allocated to each transmitter number. These animal numbers are then available and can be used to register the animals (see **7.2 Registering the animals**, page **97**).




Example: A farmer would like to feed 20 animals at one machine and has bought 20 collar transmitters. First, he numbers the collars consecutively with the animal numbers 1 to 20. Then, he enters these collar transmitters into the system by reading in their transmitter numbers (see **7.1.2.1 Reading in the transmitter numbers**, page **92**) or by entering them manually (see **7.1.2.2 Entering the transmitter numbers manually**, page **93**).

During this process, he only enters the animal number which is on the collar. These transmitter numbers are available now and can be used to register the animals into the system.

7.1.2.1 Reading in the transmitter numbers

If you intend to allocate the transmitter numbers for the first time, it is recommended to let the automatic feeder read them in. This

saves typing and prevents accidental mistyping. Proceed as follows:

1.  > **animal management** > **transmitter** > **new**
2. Hold a transmitter into the identification of a feeding station.
The number of the transmitter will be read in and displayed in the second line next to **no.** At the same time, in the third line **animal-no.** the animal number to be newly entered is suggested.

```
transmitter
▶ new
...
```



Note: You can influence the suggested animal number by selecting an allocation plan for the animal number in the fourth line **no.** (see **7.1.3** Allocating the animal numbers, page **94**).


```
new
no. #: [ 17494400]
animal no.: 21
no.: continuous
next: 21
▷ accept?
```

3. Check whether the suggested **animal-no.** is correct and in the line **accept?** press .
4. To allocate the transmitter number which has been read in to the displayed animal number, confirm the security query displayed on the right with .

```
no. 17494400
for animal 21
newly create?
```

7.1.2.2 Entering the transmitter numbers manually

Alternatively to the read-in process of the transmitters, you can also manually key in the transmitter numbers, if necessary. Proceed as follows:

1.  > **animal management** > **transmitter** > **new**
2. Enter the transmitter number into the second line next to **no.**



Note: The number must be entered figure by figure and each figure be confirmed with . After all figures have been keyed in, press until the remaining figures of the input box are zero-filled. You can also press or to move to any figures.

```
new
▷ no. #: [ 17494400]
animal no.: 21
no.: continuous
next: 21
accept?
```

3. In the third line check the suggested animal number next to **animal no.** and confirm with .
4. In the line **accept?** press .
5. To allocate the entered transmitter number to the displayed animal number, press to confirm the security query displayed on the right.


```
no. 17494400
for animal 21
newly create?
```

7.1.3 Allocating the animal numbers

If at the first allocation the transmitter numbers are automatically read in, an animal number is automatically suggested. To allocate the numbers, you may choose among two options.

7.1.3.1 Continuous allocation of the animal numbers

A counter is available which counts up each time a transmitter number is read in. Thereby all transmitter numbers detected by the antenna are allocated to continuous animal numbers, e.g. 1 to 50. Proceed as follows:

1.  > **animal management** > **transmitter** > **new**
2. In the fourth line **no.** select the option **continuous**.
3. If necessary, in the fifth line **next** you can define the animal number as of which the automatic read-in process of the transmitters should begin.


```
new
no. #: [ 17494400]
animal no.: 21
▷ no.: continuous
next: 21
accept?
```



Note: If collars are used, it is appropriate to begin with 1 and to read in the transmitters in succession.

7.1.3.2 Allocating the animal numbers on the basis of the transmitter numbers

Already at birth animals are more and more equipped with an electronic ear tag-transmitter that they wear all their life. For this transmitter type, the program of the automatic feeder allows fully automatic registration of the transmitters and the animals.

1.  > **animal management** > **transmitter** > **new**
2. In the second line **no.** select the option **automatic**.
3. In the third line **range** define the range of figures of the transmitter number that shall be taken over as an animal number with max. four digits.

```
settings
▷ no.:      [automatic]
range:      5-2
delete no.: yes
```





Example: 5-2 means that, starting to count from the right, the second to fifth figure of the transmitter number will be taken over as an animal number. **6-3** means that, starting to count from the right, the third to sixth figure of the transmitter number will be taken over as an animal number.

7.1.4 Editing the transmitter or animal numbers

If required, e.g. in case a transmitter has been lost, a transmitter number can be changed or deleted retroactively.



7.1.4.1 Changing the transmitter number

Changing the transmitter number manually

1.  > **animal management** > **transmitter** > **change**
2. Select the transmitter number to be changed.
3. In **no.** change the transmitter number and confirm with  to implement the change.

```
< 982/A>
▷ no. #: [ 17494400]
animal no.: 982
state: registered
read in?
```

Reading in the new transmitter numbers for the change


1.  > **animal management** > **transmitter** > **change**
2. Select the transmitter number to be changed.
3. In **read in?** press . The menu on the right is displayed. The transmitter number in the first line is blinking.
4. Hold the transmitter to be read in into the identification. The number is automatically taken over to the first line.

```
no. 17494400
for animal no. 982
accept?
```

5. Check whether the desired transmitter number has been taken over and press in **accept?** to implement the change.


7.1.4.2 Changing the animal number

By analogy with the transmitter number, in the above menu you can also change the animal number.

1.  > **animal management > transmitter > change**
2. Select the animal number to be changed.
3. In **animal no.** change the animal number which is currently allocated to the transmitter and confirm with . Now the change is implemented.

```
< 982/A>
no.: [ 17494400]
▷ animal no.: 982
state: registered
...
```

7.1.4.3 Deleting the transmitter numbers

1.  > **animal management > transmitter > change**
2. Select the transmitter number to be deleted and confirm **delete** with .


```
< 982/A>
▷ no.: 234567
animal no.: 982
state: available
read in?
delete?
```



Note: You can only change the transmitter numbers of non-registered animals (=state: available).

7.1.5 Deleting the transmitter numbers of animals being canceled

As a rule, the collars (or eartags) and the corresponding transmitters remain on the farm and are reused after the animal has been canceled and has left the barn. Therefore, the transmitter number of a canceled animal is not deleted as a standard. If, however, the transmitter of an animal shall **not** be reused but rather remain on the animal (electronic ear tag), carry out the following setting:

1.  > **animal management > cancel > settings**
2. In the line **delete no.** select the option yes. By doing so, when the animal is canceled the transmitter number is automatically deleted together with the animal number. This is to prevent


```
settings
▷ delete no.: [no]
```


that those transmitter numbers which have not been used are accumulated, thus effecting that no memory space is available anymore.



Note: If no electronic tags are used, the default setting **no** should remain unchanged.

7.1.6 Recalling the transmitter statistics

1.  > **animal management** > **transmitter** > **information**
2. An overview of the transmitters entered into the system is displayed. The displayed list contains the following:
 - the amount of registered transmitters resp. animals,
 - the amount of available transmitters,
 - how many further transmitters can be entered.

information	
▷ registered:	72
available:	12
free:	166

7.2 Registering the animals

The animals are fed by the automatic feeder only if they are registered there. You can register each individual animal manually or automatically. In the latter case, the animal is registered as soon as it accedes the feeding station for the first time. Thereby, the manual registration of the animals becomes unnecessary.

At registration the animal is allocated to one of the four groups A, B, C or D, thus being fed according to the feed, concentration and milk ratio plans of the corresponding group. Group allocation has also an effect on e.g. additive dispense or the alarm levels.



Example: group A for heifers (with less weight gain), group B for bull calves (with higher weight gain), group C for veal calves, group D for other calves.

To which group the animals should be allocated solely depends on the feed quantity, the feed concentration and the milk ratio

animal management	
▶ register	
...	

intended for the calves. At which station the animals are fed resp. in which pen the animals have been housed is thereby irrelevant.

If you house two animal groups, the one being fed only with milk and the other with milk powder and water, make sure to allocate these animals to different feeding groups.

7.2.1 Registering the animals manually

1.  > **animal management** > **register** > **animal**


```
register
▶ animal
  automatic
```


2. Select one of the available, non-registered animal numbers.

3. Select the **group** to which the animal shall be allocated.

```
< 20/a>
▷ group: [A]
  correct. days: 0
  additive 1: P1
  additive 2: no
  weight: 50 kg
  w. gain: 500 g
  register?
```

4. If the total duration of feeding for the animal has to be shortened, enter the desired amount of correction days into **correct. days** (see **8.2.6** Shortening or extending the total duration of feeding, page **112**).




5.  Select an additive prescription.

 **Note:** Before additive dispense can be started, the prescriptions for additive 1 or/and additive 2 must have been created (see **8.5.1** Creating a medicine prescription plan, page **126**), otherwise the message on the right will be displayed.

```
no prescription
available
```

6. Enter the representative animal weight. The weight gain is automatically calculated.

```
< 20/a>
...
▷ weight: [50]kg
  w. gain: 500 g
  register?
```

 **Note:** The weight and the weight gain are only displayed if an  additive dispenser has been activated in the Setup or if at least a feeding or concentrate station is equipped with an  animal scales. The indication of weight is important if you decide to dose the additives in accordance with animal's weight.



Note: If no animal scales is available, an average weight gain based on experience will be calculated.

7. Confirm **register?** with to register the animal.
8. Press to confirm the query on the right.

```
animal 20/a
in group A
register?
```



Note: On the day of registration the animal will receive, distributed over the day, exactly the amount of feed to which it is entitled on the first day. If you have entered correction days, the animal will receive the amount of feed to which it is entitled on the corresponding day.

7.2.2 Registering the animal automatically



If a non-registered animal enters the feeding station for the first time, it can automatically be registered. Three different automatic registration modes can be selected. The following three subchapters contain a more detailed description of these modes. Below you will find a synoptical table.

```
register
  animal
▶ automatic
```


Automatic registration mode	Transmitter number in the identification	
	available	unknown
deactivated	warning unknown transmitters	warning unknown transmitters
available transmitters	the animal will be registered	warning unknown transmitters
all transmitters	the animal will be registered	the transmitter will be entered, a new animal number will be allocated, the animal will be registered

7.2.2.1 Deactivating the automatic registration

The automatic registration is deactivated as a standard. You can restore this state at any time:



1.  > **animal management** > **register** > **automatic**
2. In **mode** select **no** and confirm with . The automatic registration is now deactivated.

```
automatic
▷ mode: [no]
```


 **Note:** If the registration function is deactivated, the warning **unknown transmitter** (see **12.2.13** Unknown transmitters, page **186**) will be given in case a non-registered animal enters the station.

7.2.2.2 Registering only available transmitters automatically

The automatic registration shortens the registration process of the animals. You can determine that only those animals whose animal numbers (more precisely: the allocated transmitter numbers) are already known by the system, are registered. If such an available transmitter number is detected by the identification, the corresponding animal will be automatically registered. The animals resp. transmitter numbers which haven't been entered into the system yet are still the cause for the warning **unknown transmitter**.

1.  > **animal management** > **register** > **automatic**
2. In **mode** select **available**.
3. Select the group into which you would like to register the animals automatically (here exemplified by group A).
4.  Select one or more additive prescriptions.



```
automatic
▷ mode: [available]
group: A
additive 1: P1
additive 2: no
weight: 51 kg
w. gain: 510 g
```

 **Note:** Before additive dispense can be started, the prescriptions for additive 1 or/and additive 2 must have been created (see **8.5.1** Creating a medicine prescription plan, page **126**), otherwise the message on the right will be displayed.

```
no prescription
available
```

5. Enter the representative animal weight of all the animals to be registered. The weight gain is automatically calculated.



Note: The weight and weight gain are displayed only if an  additive dispenser has been activated in Setup or if at least a feeding or concentrate station is equipped with an  animal scales. The indication of weight is important if you decide to dose the additives depending on animal's weight.




Note: Remove the animals, that should be weaned, from the pen before you cancel them, otherwise they are automatically registered again when accessing the feeding station, thus being set to the beginning of the feeding plan.

7.2.2.3 Entering the transmitter numbers and registering the animals automatically

To shorten the automatic registration process further, you can determine that also those animals whose animal numbers (more precisely: the allocated transmitter numbers) are not known by the system, are registered. By doing so, the read-in process or the manual input of the transmitter numbers becomes unnecessary. If an unknown transmitter number is identified by the antenna, it is automatically entered into the system together with a new animal number and at the same time registered.



Note: When initially entering the transmitter or animal numbers, the animal number is either a continuous number or it is part of the transmitter number (see **7.1.3** Allocating the animal numbers, page **94**). Check whether this kind of number allocation actually meets your expectations.

1.  > **animal management** > **register** > **automatic**
2. In **mode**: select **all**.
3. The previous chapter contains a description of the remaining settings.

```
automatic
▷ mode:      [    all]
  group:      A
  ...
```





Note: Animals **without a collar** are not allowed to stay in the pen as they might displace other animals, thus robbing an undefined amount of feed.

7.3 Canceling the animals or animal groups

If individual animals or an animal group shall not be fed according to the plan anymore, they have to be canceled and removed from the pen. The same applies to those animals whose feeding plan has lapsed.

```
animal management
  register
  ▶ cancel
  transfer
```

7.3.1 Canceling an individual animal

1.  > **animal management** > **cancel** > **animal**
2. Select the desired animal number.
3. In **plan end** you can view how long the animal will be fed according to the plan.
4. The following lines display the amount of each individual feed component the animal has consumed from registration to cancelation.
5. Confirm **cancel** with  to cancel the animal.

```
cancel
▶ animal
  group
  above plan
```

```
< 20/A > ↘ 6.5 L
▷ plan end:    5 days
  MP:         22 kg
  milk:       102 L
  additive 1:  0 g
  additive 2: 360 g
  weight:     103 kg
  initial:    47 kg
  w. gain:    723 g
  cancel?
```




Warning: After an animal has been canceled, it is not fed via the automatic feeder anymore.



Note: If for the **automatic registration mode** you have selected **all** or **available**, you should remove the canceled animals from the pen, otherwise they will be automatically registered again (see **7.2.2.3** Entering the transmitter numbers and registering the animals automatically, page **101** resp. see **7.2.2.2** Registering only available transmitters automatically, page **100**)

7.3.2 Canceling the group


1.  > **animal management** > **cancel** > **group**
2. Select the desired group.
3. In **registered** you can view the number of animals fed according to the corresponding plan.
4. In **weaned** you can view how many animals have already terminated the feeding plan and are not fed anymore.
5. Confirm **cancel** with if all the animals of the group shall be canceled, no matter if the animals are registered or weaned.
6. Confirm the corresponding security query with .

```
cancel
  animal
▶ group
  feeding period over
```

```
<group A>
▶ registered:      24
  weaned:         14
  cancel?
```

```
animals
  of group A
  cancel?
```

7.3.3 Canceling weaned animals

1.  > **animal management** > **cancel** > **feeding period over**
2. Confirm **cancel?** with if weaned animals shall be canceled.
3. Confirm the corresponding security query also with .



```
cancel
  animal
  group
▶ feeding period over
```

```
animals
  cancel?
```

7.4 Transferring the animals

An already registered animal can be transferred to another group at any time:

```
animal management
  ...
▶ transfer
```

1.  > **animal management** > **transfer**
2. Select the desired animal.
3. In **group** select the desired feeding group.
4. Confirm the query on the right with .

```
< 21/B > ↗ 8.0 L  
▷ group: [A]
```

```
animal 21/B  
in group A  
transfer?
```



Note: At transfer time the feeding day remains the same, i.e. the animal is **not** set back to the beginning of the feeding plan (= to plan day 1).

8 Feeding



Note: Please consider the documentation of the peripheral devices, if required.

8.1 Functioning of the automatic feeder

8.1.1 Feed preparation

During feed preparation the liquid components are dispensed first. As soon as the liquid in the mixer jar touches the bar electrode, milk powder will be dispensed from the powder hopper into the mixer jar. There, the portion is intensely mixed.

The warm water needed to prepare the portion is extracted from the boiler. The warm milk is pumped through the stainless steel coil of the heat exchanger into the mixer jar.

The circulation pump keeps the warm boiler water moving at high speed thus effecting a rapid heat transfer to the liquid in the stainless steel coil. The circulation pump is active when an animal is consuming a feed portion or when the calibration or a cleaning process are being carried out. If no feed has been consumed, the circulation pump will be actuated every 15 minutes for 30 seconds.

8.1.2 Feed dispense


The feed can be dispensed at the stations either in the **parallel** or the **priority mode**. Whereas in the **parallel mode** several animals can be simultaneously fed at different stations, in the **priority mode** only one animal at a time can be fed.




Note: The parallel feed dispense is only possible at those stations where the feed is dosed via the peristaltic pump. In addition to the existing peristaltic pump stations, one more valve station can be included in the parallel feed dispense respectively.

8.1.2.1 Priority mode

The feed prepared in the mixer jar is conveyed to the teat, where it is taken in by the animal, via the suction hoses and the open box valve by the suckling movements of the animal.

If long hoses are inevitable, the  servo control will facilitate feed intake especially to the young animals.

8.1.2.2 Parallel mode (SynchroFeed)

In the parallel mode, the feed is prepared in the mixer jar for several animals and simultaneously dispensed to the stations with parallel feed supply. One of these stations can also be a valve station, all other stations must be provided with feed by peristaltic pumps. At all of these peristaltic pump stations the quantity is booked on the basis of the number of revolutions of the corresponding peristaltic pumps. The peristaltic pumps are controlled respectively by an  Intelligent Feeding Station (IFS), which is integrated into the CAN-bus.

8.1.3 Feeding regime

8.1.3.1 Restricted mode

If the mixer jar is empty, the automatic feeder starts to prepare a feed portion as soon as an entitled animal enters the feeding station and is identified. The feed grounds the bar electrode. After the animal has drunk up the feed, the bar electrode is free again. If the animal is still entitled to feed, the automatic feeder prepares one further portion.

If the animal has no feed entitlement anymore, the box valve closes after the bar electrode is free again and draining time has lapsed.

If the bar electrode remains covered, the box valve closes after hold time has lapsed.

If an animal breaks off feed intake, five minutes after feed preparation the remaining quantity in the mixer jar will be released thus being available for any other entitled animal. The consumed quantity is booked for the animal. Alternatively, the feed can also be drained immediately via the mixer draining valve, if available.

Feeding program

After the animals have been registered in a group (A, B, C or D), they are fed according to the feeding plan of the corresponding group.

The daily feed quantity is spread over several intervals according to the interval feeding system (→ **Basic principle of interval feeding**).

Minimum quantity

The minimum quantity is intended to prevent the animals from consuming too small quantities. When a calf achieves the corresponding minimum quantity, this quantity will be released.

Maximum quantity


In order to avoid excessive feed intake due to too high minimum quantities, the quantities to be consumed are limited. If an animal has consumed the maximum quantity, feed dispense will be broken off for two hours for this specific animal. The accumulated quantities are still effective.

8.1.3.2 Ad libitum-mode

In the adlib-mode the automatic feeder operates without animal identification. A portion is prepared whenever the bar electrode is free. With several feeding stations the corresponding box valves open at the same time.



Caution: If the automatic feeder operates in the ad libitum mode for a long time, the box valve will heat up considerably. Therefore slip the suction hose directly on the nozzle of the mixer jar and remove the female power connector from the box valve. The same applies to an automatic feeder which is equipped with two or more box valves.

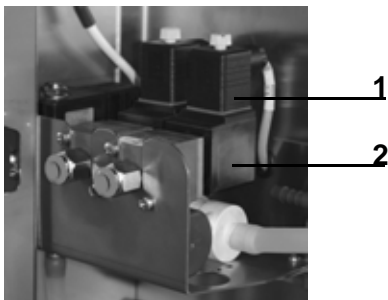

1	Female power connector
---	------------------------

2	Box valve
---	-----------



Warning: Deactivate all time-controlled cleaning menus, otherwise it may happen that the cleaning water is fed to the animals.

8.1.3.3 Priority

Here you can give specific animals feeding priority:

- > Animals for which an **alarm** is given.
- > Animals to which an **additive** is administered.
- > Animals to which priority should be given **up to** a specific feeding day. Enter the corresponding value.
- > A (feeding) **station** and all the animals fed via it.

```
priority
▷ alarm:          [no]
  additive:       no
  till feed. day: 0
  station:        none
```

8.1.4 Dispensing additional feed portions



By means of **extra portions** the animals can be fed with further feed in addition to their daily feed entitlement. Via the **MilkMaker** functionality you can make larger feed quantities available once to a specific time, e.g. to single-housed calves.

```
manual function
▶ extra portion
  MilkMaker
  ...
```

8.1.4.1 Dispensing extra portions

You can manually start the preparation of feed portions at any time. These feed portions are not deducted from the day quantity to which the animals are entitled according to the feeding plan.

```
manual function
▶ extra portion
  MilkMaker
  ...
```

1.  > **extra portion**
2. Confirm **start?** with . The extra portion will be prepared.

The following parameters are taken into consideration during the preparation and the dispense of the extra portion:

- **Output**

Here you can select where the portion has to be dispensed. Select **bucket** if the portion has to be dispensed via the discharge or select one of the registered **feeding stations**. If slight feed quantities must be dosed into a container, select a feeding station. Remove the hose from the outlet of the corresponding valve and let the feed flow into the corresponding container.

```
extra portion
▷ start?
  output:          [bucket]
  qty:             0.5 L
  temperature:    42.0 °C
  conc.:          135 g/L
  milk ratio:     100 %
  additive 1:     0 g/L
  additive 2:     0 g/L
```



Note: To dose larger milk quantities into a container, use the MilkMaker functionality (see **8.1.4.2 MilkMaker-functionality**, page **110**).

- **Temperature**

Here you can enter the temperature with which the extra portion is prepared.

- **Quantity**

Here you can enter the feed quantity to be dispensed.

- **Concentration**

Here you can enter the feed concentration of the extra portion to be prepared.

- **Milk ratio**

Here you can enter the required milk ratio of the extra portion to be prepared.

- **➕Additive**

Here you can enter the concentration for additive 1 and additive 2, if you would like to add some additives to the extra portion.

8.1.4.2 **📌➕MilkMaker-functionality**





Note: To use the MilkMaker-functionality a **➕**dosing unit in terms of a peristaltic pump is required. The submenu **MilkMaker** is only displayed, if the dosing unit has been selected in the setup of the automatic feeder (see **4.5 Equipment**, page **57**).

```
manual function
  extra portion
  ► MilkMaker
  ...
```



The MilkMaker-functionality is intended to prepare once immediately or at a defined time a large feed quantity and to pump it to a dosing unit (e.g. a MilchMobil).

Dispensing the milk portion immediately

1.  > **MilkMaker**
2. Confirm **start?** with . The milk quantity is immediately prepared and dispensed.

```
MilkMaker
▷ start?
  automatic:      [ yes]
  dispense at:   18:00
  quantity:      0.5 L
  temperature:   42.0 °C
  conc.:         135 g/L
  milk ratio:    100 %
  additive 1:    0 g/L
  additive 2:    0 g/L
```


Time-controlled dispense of the milk portion

1.  > **MilkMaker**
2. In **automatic** select **yes**.
3. In **dispense at** select the time at which the milk portion should be dispensed.
4. After the selected time has been achieved, the milk portion will be prepared according to the defined parameters and dispensed via the  connected peristaltic pump.

```
MilkMaker
  start?
▷ automatic:      [ yes]
  dispense at:   18:00
  quantity:      0.5 L
  ...
```

8.2 Changing the data of individual animals



In the menu **animal** you can carry out animal-specific settings. Here you can view and, if necessary, change the following values:

- **the group** of the animal
- **the feed quantity** of the individual animal
- **the concentration** of the dispensed feed
- **the milk ratio** of the dispensed feed
-  potentially dispensed **additives**
- the **animal weight**
- the **plan day** of the animal.

```
< 21/B > ↘ 6.5 L
▷ group:      [B]
  feed:       5.0 L
  conc.:      135 g/L
  milk ratio: 100 %
  additive 1: no
  additive 2: no
  weight:     103 kg
  plan day:   56
```

8.2.1 Changing the group

Here you can transfer an already registered animal to another group.

1.  > **feeding** > **animal**
2. Select the desired animal.
3. In **group** select the desired feeding group.
4. Confirm the query on the right with .


```
< 21/B > ↗ 8.0 L
▷ group: [A]
...
```

```
animal 21/B
in group A
transfer?
```

8.2.2 Deviations of the feed quantity or feed concentration

In **feed** resp. **conc.** you can enter

- the increase or reduction of the current, animal-specific feed quantity resp. concentration,
- how long this change shall be valid.

1.  > **feeding** > **animal** > **feed** resp. **conc.**
2. Select the desired animal.
3. Enter the validity period into **deviations**.
4. Enter the desired quantity into **quantity**.
5. In the following display lines you can check:

```
< 21/B > ↗ 8.0 L
▷ deviations: [ 3]days
quantity: 1.5 L
plan: 8.0 L
feed: 9.5 L
```

- the daily feed quantity to which the animal is entitled according to the plan (**plan**),
- the feed quantity which can be consumed after the correction has been carried out (**feed**),



Note: In **conc.** proceed as with **feed**.

```
< 21/B > ↗ 8.0 L
▷ deviations: [ 3]days
quantity: -10 g/L
plan: 135 g/L
conc.: 125 g/L
```

If the corrections are not valid anymore, the animal becomes an **expiry animal**, thus being automatically fed according to the feeding plan again.

8.2.3 Checking the milk ratio

Here you can view the milk ratio for checking purposes.

8.2.4 Changing additive dispense



To know more about how to change the additive quantities, see **8.5.3.4 Changing additive dispense, page 135.**

8.2.5 Changing the weight

Here you can change the weight. The weight gain is calculated automatically.


<	21/B	>	↗	8.0 L
▷	weight:	[65.5]kg	
	w. gain:		655 g	




Note: This menu is only displayed if the automatic feeder is equipped with an additive dispenser or at least one feeding or concentrate station is equipped with an   animal scales.

8.2.6 Shortening or extending the total duration of feeding

The total duration of feeding of an animal can be extended or shortened by „shifting“ the animal to the desired plan day.

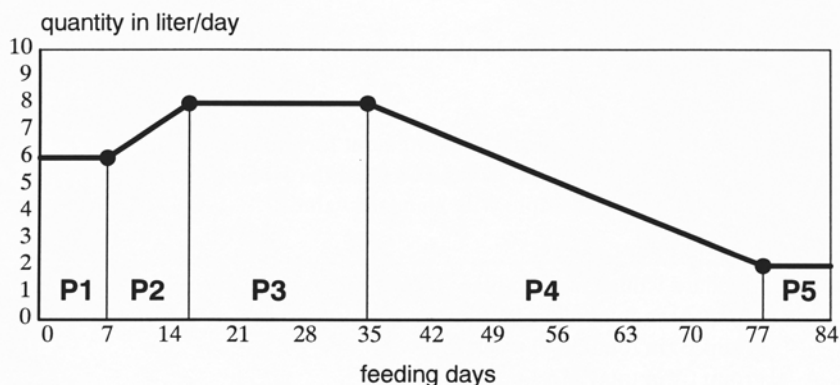

1.  > **feeding** > **animal** > **plan day**
2. Select the desired animal.

3. **Feed. day** shows the number of days that have passed since registration.

4. In **correct** select the desired amount of days.



Note: To **shorten** the total duration of feeding, enter a **positive number**. To **extend** it, enter a **negative number**. The maximum extension corresponds to the number of feeding days.

```
< 21/B > ↗ 5.4 L
feed. day: 42
▷ correct: [5]days
plan day: 47
plan end: 64 days
feed: 5.4 L
conc.: 43 g/L
milk ratio: 100 %
```

5. In the following display lines you can check:

- the **plan day** according to which the animal is fed after correction,
- when the **plan end** is achieved,
- the **feed quantity** and **feed concentration** fed to the animal on the current day,
- the current **milk ratio** of the feed portion.



Example: At registration animal 1 is already a little bit older and more developed than the other animals in the group. Therefore, for this animal the total duration of feeding will be shortened. The animal will be „shifted“ to day 14 of the feeding plan. In line 1 you can subsequently view the feed quantity of the day to which the animal is entitled on plan day 14 (7.5 liters).

```
< 21/B > ↗ 7.5 L
feed. day: 1
▷ correct: [14] days
plan day: 15
...
```

8.3 Plans


At feed preparation the following plans are taken into account:

- feeding plan
- milk ratio plan
- concentration plan
- limitation plan

Four plans each are available: feeding plan A, B, C or D, concentration plan A, B, C or D, etc.

You can allocate an animal either to group A, B, C or D. Group A is fed according to the feeding plan A and group B according to the feeding plan B, etc. Those animals having been allocated to different feeding groups can nevertheless be housed in the same pen or be fed at the same station.

Below you will find an example of a feeding plan

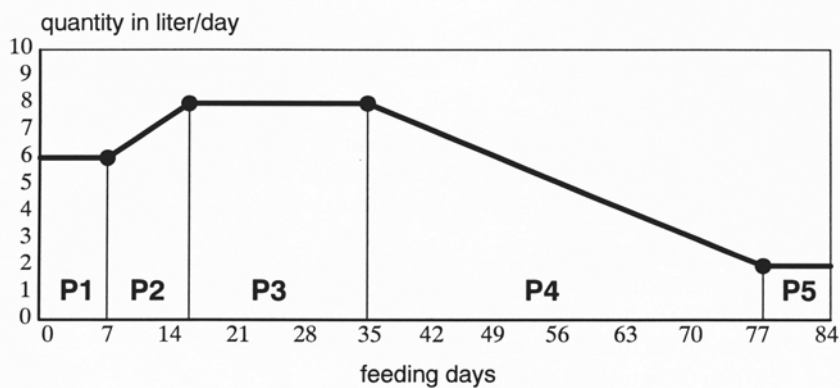

As a standard, each feeding plan is subdivided into four periods (P 1 - P 4). However, a fifth period can be added to the feeding plan, if required.

The registration day corresponds to the first day of the feeding plan.

If at start-up you have „reset“ (new installation) the device data of the automatic feeder, the machine will operate with default values. The default values are based on experience and can be changed or adapted to the needs of each individual animal at any time.


You will find the default feeding plans in the annex of this instruction manual.


8.3.1 Changing the feeding plans


1.  > **feeding** > **plans** > **feed** > **quantity**


2. Select a group. The related default feeding plan is displayed.
3. In **P 1** enter the duration (number of days) of the first feeding period.
4. Press to move to column **from** and enter the start value of the feed quantity for **P 1** (period 1).
5. Press to move to column **to** and enter the end value of the feed quantity for **P 1**.

<group A>				
	days	from	to	L
▷ P 1:	[3	6.0	6.0]	
P 2:	14	6.0	8.0	
P 3:	18	8.0	8.0	
P 4:	42	8.0	2.5	
P 5:	0	0.0	0.0	
duration:			77 days	
quantity:				478 L

 **Note:** You can increase or decrease the feed quantity by 0.1 liter-steps. The feed is then allotted to one or more portions of different size depending on feed entitlement.

 **Example:** Feed entitlement 1.6 liters, no further animal is drinking: The feed quantity is divided into four partial portions. The first portion is 0.4 liters, the second 0.5 liters and the last two 0.35 liters each.

 **Note:** Only the feed quantity that has been actually consumed will be booked.

 **Note:** As a standard four feeding periods are shown. Max. 5 periods can be activated. Whenever you have activated the last period for now, the next period will be displayed.

6. For **P 2 to P 5** you must just enter the duration of the feeding period and the final value of the feed quantity. As displayed on the screens, the final value of a feeding period always corresponds to the initial value of the next period.
7. The lower menu lines show the total duration of the feeding plan and the total feed quantity accumulated till the end of the corresponding plan.

<group A>				
...				
P 5:	0	0.0	0.0	
▷ duration:			77 days	
quantity:				478 L

Default plan values for	Duration of periods (in days)	Feed quantity (liters according to feeding plan)	MP-quantity (kg DM according to concentration plan)
Group A	77	478	64
Group B	70	384	51
Group C	64	316	42
Group D	71	353	47

8.3.2 Changing the concentration plans

For each feeding plan a corresponding concentration plan is available. Like the feeding plan also the concentration plan is subdivided into four periods as a standard. However, the duration of the periods of the concentration plans is not linked with the duration of the periods of the feeding plans.



Example: If the concentration must be the same for all feeding periods, in **P 1** of the concentration plan enter the exact number of days that correspond to the total number of days in the feeding plan.



Note: Many manufacturers of milk powder give a recommendation about the milk powder concentration per liter of feed (water including milk powder) on the packaging. In the program of the automatic feeder, however, the concentration is set per liter of water. Therefore, please refer to the following table which shows you the values to be selected in the concentration plans in order to achieve the desired concentration per liter of prepared feed.

Desired concentration (in g/L of feed)	Setting in the concentration plan (in g/L of water)	Dry matter (in %/L of feed)
100	111	10.0
105	117	10.5
110	124	11.0
115	130	11.5
120	136	12.0
125	143	12.5
130	149	13.0
140	163	14.0
150	176	15.0
160	190	16.0
170	205	17.0
180	220	18.0
190	235	19.0
200	250	20.0



Example: If the concentration per liter of feed should be 120 grams, you must select 136 g/L in the concentration plan.

1.  > **feeding** > **plans** > **feed** > **concentration**

2. Select a group. The related default concentration plan is displayed.

3. If you want to change the values, proceed as with **feed**.

<group A>			
	days	from	to g/L
▷ P 1:	[77	135	135
P 2:	0	0	0
duration:			77 days
quantity:			64 kg



Note: If the concentration plan is shorter than the feeding plan, the end of the concentration plan will be displayed as an expire plan message. The concentration of the feed portion fed last will be maintained until the feeding plan has lapsed.



Note: One period is displayed as a standard. However, you can activate up to five periods. Whenever you have activated the last period for now, the next period will be displayed.

8.3.3 Changing the milk ratio plans

The milk ratio of the feed is set in the milk ratio plan. Moreover, here you can set the milk quantity an animal group should receive and the duration of milk feeding for this group. As a standard one period (100 % milk) of the milk ratio plan is activated. However, you can subdivide the milk ratio plan into up to five periods. Either no milk (0 percent) or only milk (100 percent) or a milk ratio between 30 and 70 percent can be selected.



Note: Those animals being fed either only with milk or only with milk powder/water must be allocated to two different feeding groups.




Example: If the milk ratio must remain the same for all feeding periods, in **P 1** of the milk ratio plan enter the exact number of days which correspond to the total number of days in the feeding plan.



Note: The duration of the periods of the milk ratio plans is not linked with the duration of the periods of the feeding plans. If the milk ratio plan is shorter than the feeding plan, the end of the milk ratio plan will be displayed as a termination message. The milk ratio of the feed portions fed last is maintained until the feeding plan has lapsed.

Default values of the milk ratio plan groups A, B, C and D
P(eriod) 1: Milk ratio = 100 %
Periods 2 to 5 are not activated as a standard.

1.  > **feeding > plans > feed > milk ratio**
2. Select the desired group. The related default milk ratio plan will be displayed.
3. If you want to change the values, proceed as with **feed** and **concentration**.

<group A>				
	days	from	to	%
▷ P 1:	[77	100	100]	
P 2:	0	0	0	
duration:			77 days	
quantity:			478 L	

8.3.4 Changing the plan for limitation of quantities

The limitation of quantities controls feed allocation per day via the entitlement intervals.

Minimum quantity

The feed quantities to which an animal is entitled are saved from one interval to another and can be consumed at any time as soon as the minimum quantity is achieved. As of 8 p.m. the total remaining quantity is available and can be consumed till midnight calculation. In that case, the minimum quantity is not effective anymore. The maximum quantity defined in the plan still limits the consumed quantity per visit.

The feed quantities are continuously saved. By the minimum quantity you determine the feed amount to be saved until a feed portion is dispensed. Thereby you determine the number of meals indirectly.

This principle perfectly meets animals' needs. Because at the beginning of the feeding plan little animals can be provided with small portions, e.g. four times 1.5 liters/day. Later on, the feeding times should be reduced to only one per day by entering higher minimum save-up quantities. The long time intervals between the feeding times increase the consumption of concentrate and raw food considerably. At the same time the tendency to mutual suckling is decreased.






Note: You can increase or decrease the feed quantity by 0.1 liter-steps. The feed is then allotted to one or more portions of different size depending on feed entitlement.

Maximum quantity

To prevent that the animals consume too much feed all at once, the released feed quantity is limited. That means that the animals only get no more than the feed quantity which corresponds to the maximum quantity.



Example: An animal saved 4.0 liters of feed. The maximum quantity is 2.0 liters. If the animal visits the feeding station, max. two liters are dispensed. The remaining 2.0 liters can be consumed by the animal only after a two-hour break.

1.  > **feeding** > **plans** > **feed** > **limitation**
2. Select the desired group. The related default plan for limitation of quantities will be displayed.
3. In **P 1** enter the duration (number of days) of the first feeding period.
4. Press  to move to the column **min.** and enter the number of liters for the minimum saved quantity.
5. Press  to move to the column **max.** and enter the number of liters for the maximum quantity.

<group A>				
	days	min	max	L
▷ P 1:	[14	1.5	2.0]	
P 2:	14	2.0	2.5	
P 3:	49	2.5	3.0	
P 4:	0	0	0	
duration:	77 days			



Note: The maximum quantity must be higher than the minimum saved quantity.

6. If you want to change the values for **P 2** to **P 5**, proceed as with **P 1**.

7. The last menu line displays the total duration of the plan for limited quantities.

Default values of the minimum saved quantity and the maximum quantity for the groups A, B, C and D			
	Period	Minimum save-up quantity	Maximum quantity
Group A	1: 14 days	1.5 L	2.0 L
	2: 14 days	2.0 L	2.5 L
	3: 49 days	2.5 L	3.0 L
	4 and 5: not activated as a standard		
Group B	1: 14 days	1.5 L	2.0 L
	2: 14 days	2.0 L	2.5 L
	3: 42 days	2.5 L	3.0 L
	4 and 5: not activated as a standard		
Group C	1: 14 days	1.5 L	2.0 L
	2: 14 days	2.0 L	2.5 L
	3: 36 days	2.5 L	3.0 L
	4 and 5: not activated as a standard		
Group D	1: 7 days	1.0 L	1.5 L
	2: 14 days	1.5 L	2.0 L
	3: 14 days	2.0 L	2.5 L
	4: 36 days	2.5 L	3.0 L
	5: not activated as a standard		



Note: The set values relating to limited quantities should not be reduced at the end of the feeding period.

8.3.5 Changing the plan for maximum speed




This plan rules the percentage of the maximum speed used to turn the peristaltic pumps of the stations which are operated in the parallel mode. By default, at the beginning of the feeding period, the pumps run at 70 % of the maximum speed. This

value increases continuously and at the end of the feeding period it achieves 90 %. If necessary, the maximum speed plan can be subdivided into up to 5 periods. The value relating to the maximum speed can be 30 to 100 %.

Default values of the maximum speed plan for the groups A, B, C and D

P(eriod) 1: Start value: 70 %, End value: 90 %

P(eriods) 2 to 5 are not activated as a standard.

1.  > **feeding** > **plans** > **feed** > **max. speed**
2. Select the desired group. The related default plan of the maximum speed is displayed.
3. In **P 1** enter the duration (number of days) of the first feeding period.
4. Press  to move to the column **from** and enter the initial value for the maximum speed.
5. Press  to move to **to** and enter the final value for the maximum speed.
6. To change the values for **P 2** to **P 5**, proceed as with **P 1**.
7. The last menu line shows the total duration of the maximum speed plan.

<group A>			
	days	from	to %
▷ P 1:	[70	50	80]
P 2:	0	0	0
duration:	70 days		

8.4 Alarm levels


The alarm levels allow you to determine the time or the value as of which an alarm is given. The alarm levels are determined per group.

You can enter alarm levels for:

- **Feed consumption**
- **Feeding speed**

alarm levels	
▷	feed

- Break without additive
- Break with additive

1.  > **feeding** > **alarm level** > **feed**
2. Select the desired group to which the alarm levels should apply.
3. In **after** enter how much time (in hours) may pass at most until an alarm is given after the feed has been released. (This setting refers to the current day).

```
<group A>
▷ after:          [03:00]h
  yesterday:      80 %
  feed. speed:    70 %
  break w.o. add.: 3
  break w. add.:  1
```



Example: The value relating to the alarm level **after** is set to 3 a.m. At 8.10 a.m. a portion will be released to the animal. If three hours later, i.e. 11.10 a.m. the animal has not claimed its feed amount, an alarm will be given for this animal.

Default value:	3 h(ours)
Range:	0 to 9 a.m.

4. In **yesterday** enter the feed quantity that should have been consumed at least.

Default value:	80 %
Range:	0 % to 99 %

```
<group A>
  after:          03 h 00 min
▷ yesterday:      [80]%
  feed. speed:    70 %
  break w.o. add.: 3
  break w. add.:  1
```



Example: The alarm level is set to 80 %. If the animal consumes less than 80 % of the feed to which it was entitled yesterday according to the feeding plan, an alarm is given.

5. In **feed. speed** enter the desired value.

Default value:	70 %
Range:	0 % to 99 %

```
<group A>
  after:      03 h 00 min
  yesterday:  80 %
  ▶ feed. speed: [70]%
  break w.o. add.: 3
  break w. add.: 1
```




Note: The average, animal-specific feeding speed of the current feeding day is daily compared in the evening with the average of the previous three days.



Example: Animal's average feeding speed of the previous three days is 1 (one) liter per minute. The alarm level is set to 70 %. If the average, animal-specific feeding speed of the current feeding day drops to 0.6 liters per minute, the alarm level (70 % of 1 liter = 0.7 liters) is not achieved. An alarm is given.

6. Enter the desired value in **break**.



Note: If the automatic feeder is equipped with an  additive dispenser, in **break w.o. add.** (= break without additive) and **break w. add.** (= break with additive) you must enter how often feeding with or without additive may be broken off before an alarm is given.

```
<group A>
  after:      03 h 00 min
  yesterday:  80 %
  feed. speed: 70 %
  ▶ break w.o. add.: [3]
  break w. add.: 1
```

Default value:	Break without additive: 3 Break with additive: 1
Range:	0 to 99

8.5 Additive dispense

To dispense medicine and electrolyte up to two additive dispensers can be connected to the automatic feeder: A dispenser for powder or liquid additives and one further solely for liquid additives.

```
feeding
...
▶ additive
...
```

You can determine the dosage of medicine/electrolyte and the duration of administration in the prescription plans. Up to four prescription plans for medicine and one prescription plan for electrolyte can be created. Medical preparations are dosed into the milk or milk powder/water mix, whereas electrolytes are normally dosed into the water.



Note: The electrolytes can also be given according to the medicine prescription plan. In that case, the electrolytes are dosed into the milk or milk powder/water mix like the medical preparations.

Additive contains the following menus:

- **Animal**
- **Group**
- **Medicine prescription**
- **Electrolyte prescription**

```
additive
▶ animal
  group
  medicine prescr.
  electrolyte prescr.
```



Note: Please observe the indications on the package insert and discuss the dosage with the veterinary, if necessary.



Warning: Additives can be harmful to health. Therefore, make sure that only authorized persons have access to them.

8.5.1 Creating a medicine prescription plan

To give additive to the animals you have to create a prescription plan and allocate it to a dispenser. Up to four different medicine prescription plans can be created.

```
additive
  animal
  group
  ► medicine prescr.
  electrolyte prescr.
```

8.5.1.1 Selecting the dosage

The dosage is made either

- according to animal's weight (in g/100 kg),
- according to the feed quantity (in g/L),
- as day quantity per animal and day (g/day).

Dosing the additive according to weight

Heavy animals are given more additive than light-weight ones. The weight entered at registration is automatically increased each day by the weight gain and the weight gain progression.

```
<prescription 1>
...
▷ dosage:      [g/100kg]
...
```

Dosing the additive according to the feed quantity

Those animals getting plenty of feed will get more additive than those animals getting less feed. The additive quantity is equally apportioned among the feed portions.

```
<prescription 1>
...
▷ dosage:      [ g/L]
...
```




Example: Animal 1 receives 8 liters, animal 2 2 liters per day. With a medicine quantity of 2 g/L, 16 grams per day are given to animal 1 and 4 grams per day to animal 2.

Dosing the additive as day quantity



Example: If you want to give a specific additive quantity per day to an animal, select **dosage g/day**.

```
<prescription 1>
...
▷ dosage:      [ g/day]
...
```

1.  > **feeding** > **additive** > **medicine prescr.**
2. In **dosage** select the desired setting.

8.5.1.2 Distribution

If the additives are dosed according to weight (**g/100 kg**) or as a day quantity (**g/day**), you can distribute them throughout the day as follows:

- once (daily)
- twice (daily) or
- equal (= even distribution among all the portions).



Note: If you have selected **once** and **twice**, the additive will be apportioned among the „mid“ portions. Basically, the first (unaltered feed taste) and last portion (prevention of medicine left-overs in the mixer jar) are free from additive. Exception: With two portions, the additive is dosed into the first portion.

Distribution type „once“

The additive quantity is dosed into the „mid“ portions of the first feed claim of the day.



Example: An animal weighing 100 kg is entitled to 3 liters of feed, the minimum quantity is 2 liters and 9 g/100 kg additive should be given. At the first feed claim of the day no additive is dosed into the first and fifth portion whereas 3 grams are dosed each into the second, third and fourth portion.

```
<prescription 1>
...
dosage:      [ g/day]
▷ distribute: [equal]
...
```

Distribution type „twice“

Half of the additive quantity is apportioned among the portions of the first feed claim in the morning and the rest among the portions of the first feed claim in the afternoon.

First day's half: midnight to noon, second day's half: noon to midnight


```
<prescription 1>
...
dosage:      [ g/day]
▷ distribute: [twice]
...
```




Example: An animal weighing 100 kg can claim 2 liters each at the first visit to the feeding station in the morning and in the afternoon. The additive dosage is 9 g/100 kg. At the first feed claim in the morning no additive is dosed into the first and fifth portion whereas 1.5 grams each are dosed into the second, third and fourth portion. The same applies to the first feed claim in the afternoon.

Distribution type „equal“

The additive is apportioned among all the feed portions.

1.  > **feeding** > **additive** > **medicine prescr.**
2. In **distribute** select the desired setting.

```
<prescription 1>
...
dosage:      [  g/day]
▷ distribute: [equal]
...
```

8.5.1.3 Dispenser




Select the dispenser that should dose the additive according to the prescription plan.

```
<prescription 1>
...
▷ dispenser:      2
```

8.5.1.4 Duration of medication and additive quantity

Like the feeding and concentration plans, the prescription plans can be subdivided into five periods (P 1 - P 5). This allows you e.g. to continuously increase the additive quantity over a long period of time and to reduce it again at the end of treatment.

```
additive
  animal
  group
  ► medicine prescr.
  electrolyte prescr.
```

1.  > **feeding** > **additive** > **medicine prescr.**
2. Enter the duration (number of days) of the first feeding period in **P 1**.
3. Press  to move to the column **from** and enter the desired value.
4. Press  to move to the column **to** and enter the desired value.

```
<prescription 1>
      days from to g/
▷ P 1: [3  0  0]
P 2:   0  0  0
```

5. With **P 2** to **P 5** proceed as with **P 1**.

Unlike the feeding plans, for the medicine plans the final value of the preceding period is not taken over as start value. Each period can be entered individually.

<prescription 1>			
	days	from	to g/
▷ P 1:	[3	10	20]
P 2:	0	0	0

6. In **duration** you can check the total duration of additive dispense.

7. If you want to create further prescription plans, proceed as explained before.



Note: The message on the right may be displayed if you have selected high **medicine dosages** and subsequently changed the type of dosage (**dosage**) from e.g. g/100 kg to g/L.

If you press , the values entered into the prescription plan will be automatically corrected for the maximum values. If you want to enter the values by yourself, press to terminate the process.

```
runtime too long!
reduce quantity?
```




Note: The prescription plans are not linked to animal's housing date. The additive is dispensed only after you have activated the prescription plans **P 1, P2, P3 or P4** under **additive 1 resp. 2**. If the total duration of feeding has lapsed according to the feeding plan, the feed will be given further with additive. In that case, the feed quantity fed last will be maintained until the end of the prescription plan.



Note: The additive quantity should not fall short of 1 g / portion. If the additive quantity is less than 1 g / portion, add some glucose or milk powder to the additive in order to increase the quantity.


8.5.2 Creating the electrolyte prescription plan

You can create one electrolyte prescription plan.

1.  > **feeding** > **additive** > **electrolyte prescr.**
2. Enter the electrolyte **quantity** (concentration).
3. Enter the **duration** of the electrolyte dispense.
4. Enter the amount of **electrolyte** feed per animal and meal.
5. Enter the amount of **feed** the animal is allowed to consume per meal. The maximum feed quantity an animal is allowed to consume is limited by the feeding plan.

```
additive
...
  medicine prescr.
▶ electrolyte prescr.
```


```
electrolyte prescr.
▷ qty:          [ 30]g/L
  duration:      2 days
  EL:            1.5 L
  feed:          2.0 L
  wait. time:    02:00
  dispenser:     2
```

 **Note:** The animals receive electrolyte and feed by turns. If you enter 0 L in feed, the animal will receive solely electrolyte feed.

6. In **wait. time** you can enter how long the animal has to wait until it is allowed to claim feed after electrolyte or viceversa. The waiting time is also valid if the animal receives solely electrolyte (feed = 0.0 L).
7. Select the **dispenser**.



8.5.3 Programming additive dispense

After you have created the prescription plan, you can allocate it to individual animals or a group and then activate it. You can also allocate several prescription plans to a dispenser, thus allowing flexible additive dosage according to plan.

 **Note:** If two dispensers are connected, two different medicines or an electrolyte and a medicine can be given to an animal or a group at the same time.

Hereinafter it is assumed that the automatic feeder is equipped with two additive dispensers and that you can choose between four medicine prescription plans and the electrolyte prescription plan.


8.5.3.1 Giving medicine to individual animals

1.  > **feeding** > **additive** > **animal**
2. Select the desired animal.
3. Select whether **additive 1**, **additive 2** or **both** should be dispensed. Press  in the corresponding line. How to proceed further is exemplified by **additive 1**.

```
additive
▶ animal
...
```


3.1 In **dispensed** select the prescripton plan.

```
< 21/B > ↘ 8.0 L
▶ additive 1: no
  additive 2: no
  blocked: no
```

3.2 Further lines are shown. To enter deviations, press  in **dosing**. The following lines will show the dosage according to the prescription plan and the corrected dosage.

```
< 21/B > ↘ 8.0 L
▷ dispensed: [ no]
```


```
< 21/B > ↘ 8.0 L
  dispensed: P2
▶ dosing: 12 g/100 kg
  weight: 60 kg
  additive 1: 1.2 g
  day w. add.: 1
```

3.3 To correct the weight, press  in **weight**. The weight gain is automatically adapted to the new weight.



Note: If the additives are to be dispensed according to animal's weight, it is imperative to key in the exact weight of the corresponding animal since heavy animals are given more additive than light-weight ones.


3.4 **Add. 1** shows the additive quantity.

3.5 To extend or shorten the duration of additive dispense, press  in **day w. add.** The following lines will show the corrected **prescription day** and **prescription end**.

```
< 21/B > ↘ 8.0 L
▶ day w. add.: 3
  correct: 2 days
  prescr. day: 5
  prescr. end: 7 days
```

4. **Blocked** (see 8.5.4 Handling remaining portions, page 137).

8.5.3.2 Giving electrolyte to individual animals

1.  > **feeding** > **additive** > **animal**
2. Select the desired animal.
3. Select whether **additive 1** or **additive 2** is the **electrolyte**. Press in the corresponding line. How to proceed is exemplified by **additive 1**.
 - 3.1 In **dispensed** select **EL**.
 - 3.2 Further lines are displayed. To enter deviations, press in **dosing**. The following lines show the dosage according to the prescription plan and the corrected dosage.
 - 3.3 In **EL** the electrolyte/feed quantity is displayed. To change it, press .
 - 3.4 In **feed** you can change the milk/feed quantity an animal is allowed to consume per meal.
 - 3.5 If in **day w. add.** you press , you can extend or shorten the duration of additive dispense. The following lines show the corrected **prescription day** and **prescription end**.

```
additive
▶ animal
...
```


```
< 21/B > ▾ 8.0 L
▶ additive 1: no
  additive 2: no
  blocked: no
```

```
< 21/B > ▾ 8.0 L
▷ dispensed: [ no]
```

```
< 21/B > ▾ 8.0 L
  dispensed: EL
▶ dosing: 0 g/L
  EL: 0.0 L
  feed: 0.0 L
  day w. add.: 1
```

```
< 21/B > ▾ 8.0 L
▶ day w. add.: 3
  correct: 2 days
  prescr. day: 5
  prescr. end: 7 days
```

8.5.3.3 Giving additive to a group

1.  > **feeding** > **additive** > **group**
2. In **group** select the desired group.
3. The line **additive 1** resp. **additive 2** is variabel. If additive 1 or additive 2 are already given to one or more animals of the group, **part** will be displayed. If all animals of the group are given the same additive, the short form of the corresponding prescription (**P1**, **P2**, **P3** or **P4**) or **EL** will be displayed.

```
additive
  animal
▶ group
...
```

```
<group A>
▶ additive 1: [part]
  additive 2: part
  blocked: no
```

3.1 If you press , a list will show you how many animals of the group are given

- > neither medicine nor electrolyte,
- > medicine according to the correspond-ing pre-scription plan,
- > electrolyte.

```
<group A>
▶ dispensed:      [part]
  none:           17
  P1:             1
  P2:             2
  blocked:       0
```

3.2 If you want to give additive to the group, in the line **dispensed** press and select the corresponding prescription. The message on the right is displayed. Press if the animals of the group should receive additive according to the prescription plan (here: **P1**).

```
group A
additive P1
dispense?
```






Note: Blocked animals (see **8.5.4** Handling remaining portions, page **137**) are not given additive. Those animals which are already given additive, are not „migrated“ to the prescription plan of the group. If all animals, even those which are already given additive, must receive additive according to the prescription plan of the additive group, you have to enter **no** in **additive 1** and **additive 2**. The message on the right is displayed. Press to confirm the input. Now you can select the prescription plan that shall be valid for all the animals of the group.

```
group A
no additive
dispense?
```



Example: Some of the animals of group A are receiving **additive 1** (an electrolyte) according to the prescription plan 1 (P1), some according to the prescription plan 2 (P2), some others are not receiving any additive, an animal is given electrolyte according to the electrolyte prescription plan (EL). All the animals of the group have to be „migrated“ to the prescription plan 4 (P4). If in line **additive 1** you select P4, those animals which up to now have not received any additive or electrolyte will receive additive 1 according to the prescription plan 4 (P4). If also those animals which up to now have received additive according to P1 or P2 or to the electrolyte prescription plan have to be „migrated“ to P4, first of all you must deactivate additive dispense for all the animals of the group. Select **no** in **additive 1** and proceed as described under **note**. The same also applies to **additive 2**.

8.5.3.4 Changing additive dispense

1.  > **feeding** > **animal** > **additive 1 resp. 2**
2. Select the desired animal.
3. In the line **additive 1** resp. **2** the corresponding prescription plan is displayed. To change the settings, press :
 - 3.1 In the line **dispensed** you can terminate additive dispense [**no**], select another prescription plan (**P1**, **P2**, **P3** or **P4**) or **EL**.
 - 3.2 If you want to change the additive quantity for the selected animal, in **dosing** press . A four-line submenu will be displayed:
 - 3.2.1 In **deviations** enter the desired validity period.

```
feeding
▶ animal
...
```

```
< 21/B > ↘ 8.0 L
...
▶ additive 1: P2
additive 2: P3
```

```
< 21/B > ↘ 8.0 L
dispensed: EL
▶ dosing: 0 g/L
EL: 0.0 L
feed: 0.0 L
day w. add.: 1
```

3.2.2 In **quantity** enter the amount by which the currently dispensed additive quantity should be increased or reduced.

3.2.3 The amount of dosage according to the prescription plan (**prescription**),

3.2.4 The amount of dosage after correction (**dosing**).

IPress once to access the one higher menu level:

3.3 In **weight** (only if in **dispensed** you selected **P1**, **P2**, **P3** or **P4**) the current animal weight is displayed. To change it, press . Another submenu will be displayed:

```
< 21/B > ↘ 8.0 L
dispensed:      P2
dosing:        12 g/100 kg
▶ weight:       60 kg
additive 1:    1.2 g
day w. add.:   1
```

3.3.1 In **weight** enter the desired value. The weight gain is calculated automatically.

3.4 In **additive** 1/2 (only if in **dispensed** you selected **P1**, **P2**, **P3** or **P4**) the (updated) additive quantity is displayed.

3.5 In **EL** 1/2 (only if in **dispensed** you selected **EL**) the electrolyte/feed quantity is displayed. To change it, press .

3.6 In **feed** (only if in **dispensed** you selected **EL**) you can change the milk/feed quantity the animal is allowed to consume per meal.

If in **day w. add.** you press , you can extend (but only as of the second day of additive dispense!) or shorten the duration of additive dispense. In the following lines the corrected **prescription day** and **prescription end**.

```
< 21/B > ↘ 8.0 L
▶ day w. add.:  3
correct:       2 days
prescr. day:   5
prescr. end:   7 days
```



Note: If the deviation plan is not valid anymore for the animal, this animal becomes an **expire animal** (end of the plan) thus being automatically provided with additive according to the prescription plan.

8.5.4 Handling remaining portions


The function **block remaining portions** prevents specific animals from drinking up feed residues, which contain additive (medicine!).


If an animal has not drunk up a feed portion, which contains additive (the bar electrode is covered), feed consumption will be blocked for those animals which should not receive additive.


Blocked animals are allowed to be fed again,

- if the remaining portion has been drunk up by an animal which is allowed to receive additive or consume remaining portions,
- or if the remaining portion has been automatically pumped out via the mixer draining valve (if available).

8.5.4.1 Blocking the remaining portions for individual animals

1.  > **feeding** > **additive** > **animal**
2. Select the desired animal.
3. In **blocked** select whether the remaining portions, which contain additive, shall be blocked for the animal.




 **Note:** To cancel blocking for an animal so that it is allowed to receive additive, you must select **no** in **blocked**. Only then you can adjust the desired prescription plan in **additive 1 or/and additive 2**. The same applies if you want to block an animal to which additive is being given. Select **no** in **additive 1** and **additive 2** and only then **yes** in **blocked**.

 **Note:** Blocked animals are not given additive even if additive dispense is active for the complete feeding group (see **8.5.3.3 Giving additive to a group**, page **133**).

```
additive
▶ animal
...
```

```
< 21/B > ↘ 8.0 L
additive 1:    no
additive 2:    no
▷ blocked:     [yes]
```


8.5.4.2 Blocking the remaining portions for animal groups


1.  > **feeding** > **additive** > **group**
2. Select the desired group.
3. If in **blocked** you press , you will access a submenu where you can block remaining portions with additive for the displayed animal group.
4. In **blocked** select **yes** and press . All the animals of the corresponding group are not allowed to drink the remaining portions, unless additive is currently being administered to them.

```
additive
  animal
  ► group
  ...
```

```
<group A>
  additive 1:      part
  additive 2:      EL
  ► blocked:       no
```

```
<group A>
  ► blocked:       [no]
  dispensed:      1
  not blocked:    5
  blocked:        0
```

 **Note:** Electrolyte can be dispensed even if medicine dispense is blocked for an individual animal or the complete group (see **8.5.3** Programming additive dispense, page **131**).

 **Note:** The feed residues with additive are pumped out or fed to an animal which is allowed to get additive. If an animal which is entitled to additive is followed by a blocked animal, the feed portion will be prepared only after the mixer jar has been (all-automatically) rinsed with clear water.

9 Cleaning

The automatic feeder has to be cleaned at regular intervals, particularly when fresh milk is fed. The following cleaning menus can be selected:

- **Mixer**
- **➔Heat exchanger** (serial equipment with **VP**)
- **Circuit cleaning**
- **VP➔Air** (pulsating compressed-air cleaning)
- **VP(Box) valves**
- **Sponge** (= heat exchanger cleaning with sponge)
- **Hose**
- **Settings**

```
cleaning
▶ mixer
  heat exchanger
  circuit cleaning
  air
  valves
  sponge
  hose rinsing
  settings
```



Note: certain failures prevent the start of cleaning processes, e.g. when water or detergent have not been calibrated yet.

Type and frequency of the cleaning process depend on the composition and the germ-content of the milk to be fed.



Warning: Detergent can be harmful to health. Therefore make sure that only authorized persons have access to it.

9.1 Settings

In this menu you can enter:

- the temperature of the cleaning water,
- **➔**the detergent quantity,
- whether the teat should be cleaned.

1. > **cleaning** > **settings**

```
settings
▷ temperature:  [45]°C
  detergent:    0 ml/L
  clean teat:   no
```

2. In **temperature** enter the desired temperature of the cleaning water.
3. In **detergent** enter the desired detergent quantity.

	Temperature	Detergent quantity
Default value:	45 °C	0 ml/L
Range:	10 to 50 °C	0 ml/L to 25 ml/L



Note: The temperature of the cleaning water and the detergent quantity apply to all cleaning processes! Anyhow they can be changed at any time.

4. If the teat must be cleaned, too, select **yes** in the line **clean teat**. In that case, the rinsing water is not drained via the mixer draining valve, if available, but via the teat.



Note: The detergent is dispensed only if the mixer draining valve is available.

9.2 Mixer


The mixer can be cleaned automatically (time-controlled) or manually, with or without detergent.





Note: The mixer is automatically cleaned twice a day, at 7:00 a.m. and at 10 p.m. Max. four cleaning cycles can be carried out. The default values of the cleaning times can be changed at any time.




Note: If mixer cleaning does not take place at the entered time, the reason for it may be that heat exchanger cleaning is taking place simultaneously or has been carried out before. The same applies if between heat exchanger cleaning and mixer cleaning no feed has been claimed. In that case, too, mixer cleaning will not take place.

If the automatic feeder is equipped with the  cleaning kit, the detergent is dosed all-automatically and the cleaning water is drained all-automatically via the mixer draining valve.


If the automatic feeder is not equipped with the  cleaning kit, after pre-cleaning you can pour some detergent into the mixer jar, if required.

With  you can all-automatically drain the cleaning water via the teat by means of the training pump. However, make sure that during the cleaning process no animal is sucking at the teat.

Alternatively you can also tip over the mixer. In that case, you must deactivate beforehand the function **mixer emptying via the teat**.

With  you can drain the cleaning water via the mixer draining valve.

9.2.1 Starting mixer cleaning automatically/time-controlled

1.  > **cleaning** > **mixer**
2. Enter the number of cleaning cycles in **cleaning/day**.
3. Enter the desired time in **cleaning 1, 2...**

If the cleaning cycle is completed, the message on the right is displayed.

```


mixer cleaning
▷ start?
  cleaning/day:      1
  cleaning 1        22:00
  
```



Note: If at cleaning time there is still some liquid in the mixer jar (the bar electrode is covered), automatic cleaning will be deferred by one hour at most. During that time the animal can drink up the liquid in the mixer jar. If the mixer jar is not emptied within one hour, the liquid in the mixer jar will be drained via the mixer draining valve, if available, or via the teat (provided that **empty via teat** is active) and the cleaning cycle will start running.

These details also apply to **HE cleaning**.

9.2.2 Starting mixer cleaning manually

1.  > **cleaning** > **mixer**
2. Confirm **start?** with .
3. Change the detergent quantity, if necessary, and confirm with .

```

mixer cleaning
▷ start?
  cleaning/day:      1
  cleaning 1        22:00

```



Note: Observe the notes in chapter **Starting mixer cleaning automatically/time-controlled**.

```


mixer cleaning
completed!




```

9.3 Heat exchanger cleaning (serial equipment with)

For hygienic reasons, the heat exchanger must be daily cleaned. In the process all the components of the automatic feeder (except for the suction hoses) are cleaned with water and detergent. That prevents creation of milk deposits or other impurities.


Heat exchanger cleaning can be activated manually or automatically. If automatic heat exchanger cleaning is active (the number of cleaning processes per day is more than 0), automatic mixer cleaning becomes no longer necessary as the mixer jar is cleaned, too.

 **Note:** heat exchanger is automatically cleaned twice a day, at 7:00 a.m. and at 10:00 p.m. Max. four cleaning cycles can be carried out. The default values of the cleaning times can be changed at any time.

1.  > **cleaning** > **heat exchanger**
2. Confirm **start?** with .
3. Change the detergent quantity, if necessary, and confirm with .

9.4 Circuit cleaning


The heat exchanger, the suction hoses and the milk hose can be simultaneously cleaned with detergent.



1.  > **cleaning** > **circuit cleaning**
2. In **water amount** enter the desired water quantity for pre-cleaning and rinsing.

```
cleaning
...
▶ circuit cleaning
...
```

```
circuit cleaning
▷ start?
water amount:      2 L
```

Default value:	2 L
Range:	1 L to 10 L

 **Note:** The longer the hoses, the larger should be the water quantity for pre-cleaning and rinsing.

3. Confirm **start?** with .
4. Change the detergent quantity, if necessary, and confirm with .


```
circuit cleaning
detergent:      0 ml/L
```

The automatic feeder starts pre-cleaning.

After a short time pre-cleaning is broken off. The message on the right is displayed:


```
hoses
disconnected?
```

5. Make the suction hoses ready for the cleaning process:
 - 5.1 Remove the suction hoses (4) + (5) from the hose nozzles on the teats and the milk hose from the milk supply of the automatic feeder.

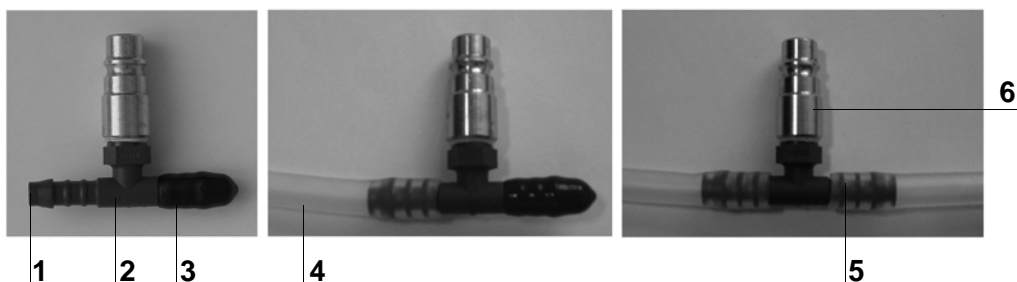

1 Hose nozzle	4 Suction hose (first station)
2 Cleaning adaptor	5 Suction hose (second station)
3 Rubber closing cap	6 Coupling for milk supply

- 5.2 Slip the suction hoses on the plastic hose nozzles of the cleaning adaptor.
- 5.3 Place the cleaning adaptor next to the discharge.

 **Note:** Do **not** connect the cleaning adaptor to the milk supply **yet!**

Press to continue pre-cleaning.

When pre-cleaning has been completed, the message on the right will be displayed.

hoses
connected?

7. Connect the cleaning adaptor to the milk supply.
8. Press to start main cleaning. The display shows the time left till the end of main cleaning.
9. When main cleaning has been completed, the message on the right will be displayed. Remove the cleaning adaptor and place it next to the discharge.

hoses
disconnected?

10. Press to start rinsing.

11. When circuit cleaning has been completed, the message on the right will be displayed. Remove the suction hoses from the cleaning adaptor. Reconnect the milk hose to the automatic feeder and the milk tank and slip the suction hoses on the hose nozzles of the teat. Confirm the message with .

```
hoses
connected?
```

12. Now you can reactivate the automatic mode of the automatic feeder.


9.5 Air (pulsating compressed air cleaning)

Compressed air cleaning allows you to clean the suction hoses up to the top of the teat without need of using detergent. To achieve efficient cleaning, the air pressure must be between 2 and 2.5 bar. The compressed air should be supplied by an oil-free compressor with a capacity of 100 liters per minute and which is equipped with a pressure reducer.



Caution: If the air pressure is more than 2.5 bar, the diaphragm of the milk solenoid valves may be damaged.

Compressed-air cleaning (hereinafter called air cleaning) can be started automatically or manually.

1.  > **cleaning** > **air**
2. In **start after** enter the time that should elapse after the last portion has been dispensed before **air cleaning** starts running **automatically**.
3. If you want to **manually start** air cleaning, in **F-station** press . Select the **feeding station**.
4. In **mode** select the intensity of air cleaning.
5. In **start** press .

```
air cleaning
▷ start after: [ 30]min
F-station
```

```
<station 1>
start?
▷ mode: [ medium ]
```


```
air cleaning
start after: [ 30]min
▶ F-station
```

	Start after	Intensity
Default value:	30 min	medium
Range:	0 to 120 min	low, medium, high

9.6 (Box) valve cleaning

This menu is only displayed if in **setup > circ. valve** you selected **valve**.

The box valves can be all-automatically cleaned even if the automatic feeder is not equipped with the kit for fully automatic heat exchanger cleaning. In that case, the box valves are only cleaned with cold water. No detergent will be added.

1.  > **cleaning > valves**
2. In **start after** enter the time that should elapse after the last portion has been dispensed before cleaning starts running.
3. In **duration** enter how long the valves should be cleaned.

```


valve cleaning
▷ start?
  start after:   30 min
  duration:      3 sec

```

	Start after	Duration
Default value:	30 min	3 sec
Range:	0 min, 5 to 120 min	1 to 10 sec


9.7 **Sponge cleaning**

If the automatic feeder is not equipped with the fully automatic heat exchanger cleaning or the latter is deactivated, the stainless steel coil of the heat exchanger should be daily (recommended!) cleaned with the sponge ball to remove deposits and milk residues. The sponge ball is used as a mechanical cleaning aid.


1.  > **cleaning** > **sponge**
2. Open the quick coupling for sponge cleaning.

```
cleaning
...
▶ sponge
...
```



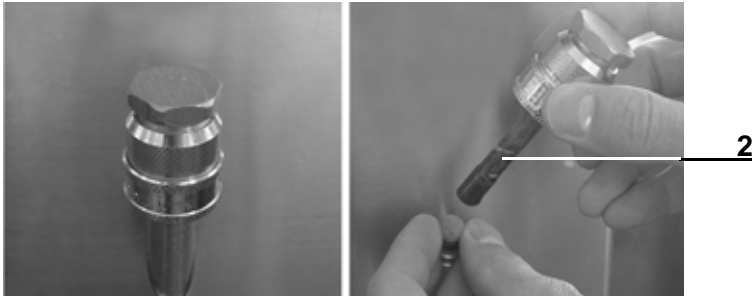

With :

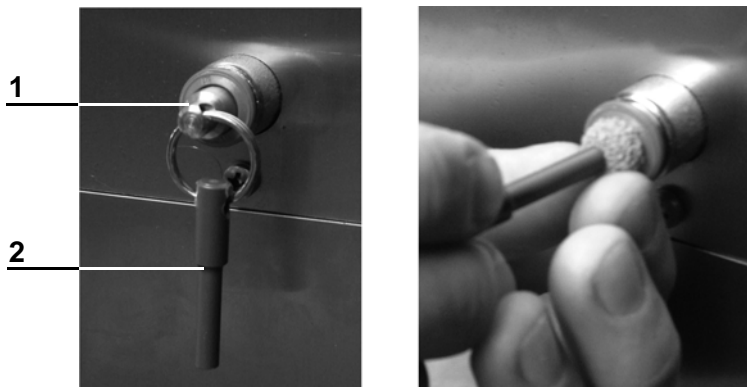

With :



1	Metal plug
2	Tappet

3. Press the sponge ball into the opening by means of the tappet.
4. With : Close the quick coupling by means of the metal plug.
With : Close the quick coupling by means of the tappet.
5. Confirm **start?** with  to start the cleaning process. The control message on the right is displayed.
6. Confirm **sponge inserted?** with .

```
sponge cleaning
▶ start?
```

The sponge is pressed by the water through the stainless steel coil.


```
sponge
inserted?
```

7. As soon as **sponge cleaning** is completed, remove the sponge ball from the mixer jar.


8. Confirm **sponge removed?** with .

```
sponge
removed?
```

9. The cleaning water is drained off via the mixer draining valve, if available. If the draining valve is missing, tip over the mixer jar to empty it.

 **Note:** If there is some air in the hose, the water will not drain off. You can activate the feeding pump in support of this process. To do so, press .

10. Rinse with clear water. To do so, use the menu „water HE“ in the manual functions ()

 **Note:** If the cleaning sponge pushes forward dirt or deposits, you should repeat the cleaning process immediately afterwards and later on at regular intervals.

9.8 Rinsing the hose

The suction hose can be rinsed each time a calf visits the feeding station.

As soon as an animal has drunk up the last portion to which it is entitled, the automatic feeder dispenses 0.25 liters of warm water into the mixer jar (after draining time has lapsed). As an animal usually stays a little bit longer in the feeding station suckling at the teat, in this way the suction hose can be easily rinsed.

- > **cleaning** > **hose rinsing**
- Select the desired group.

```
cleaning
...
▶ hose
...
```

3. In **activated** select the desired setting.
4. In **as of plan day** enter the desired value.

```
<group A>
> activated:          [yes]
  as of plan day:    14
```



Note: By default suction hose rinsing is activated only after the calves have already been fed for 14 days on the automatic feeder because young calves are not likely to drink the water. This value can be adapted to each individual animal group.



P If two or more stations are operated in the parallel mode, hose rinsing will not take place.

10 Diagnostic

The menu **diagnostic** facilitates troubleshooting when a technical problem arises. In addition, it allows you to check the settings in Setup.



Note: Please consider the documentation of the peripheral devices, if required.

```
diagnostic
▶ valves
  motors
  heating
  sensors
  stations
  control
  version
  setup
  software
```

10.1 Checking the valves/motors

Here you can check whether the following actuators as well as their control are working properly.

Valves

- **Water valve boiler**
- **Water valve HE** (HE = heat exchanger)
- **Milk** (milk valve)
- **Mixer draining valve**, if available
- **Circulation valve** (⦿ valve cleaning or heat exchanger cleaning)

and

Motors

- **Mixer**
- **Milk pump**
- **Powder**
- **⦿ Additive 1**
- **⦿ Additive 2**
- **⦿ Detergent**






```
diagnostic
▶ valves
  motors
  ...
```

```
valves
▷ water bo.:      open?
  water HE:      open?
  milk:          open?
  mixer drain:   open?
  circ. valve:   open?
  air valve:     open?
```

```
diagnostic
  valves
▶ motors
  ...
```


```
motors
▷ mixer:          start?
  milk pump:      start?
  powder:        start?
  additive 1:    start?
  additive 2:    start?
  detergent:     start?
  feed. pump:    start?
  circulation pump
```

- Feeding pump
- Circulation pump

1.  > **diagnostic** > **valves resp. motors**
2. As long as in e.g. **valves** > **water valve HE** you keep  pressed, the valve remains open.
3. In **circ. pump** press . To check the functioning of the circulation pump, in **start?** press . To carry out a more detailed function check, in **check?** press .



```

circulation pump
▷ start?
  check?
    
```

 **Note:** This test also takes place automatically at midnight.

10.2 Checking the heating

In this menu you can check whether the boiler heating is working properly.

1.  > **diagnostic** > **heating**
2. As long as in **on?** you keep  pressed, the boiler should heat up and the temperature increase.

```




diagnostic
...
▶ heating
...
    
```


```

heating
▷ on?
  boiler:          42.1 °C
    
```

10.3 Checking the sensors

In this menu you can check the following sensors:

-  Supply,  spot and bar electrode,
- Button for the manual training pump (active/inactive),
-  Detergent (ok/empty),
- Mixer and boiler sensors (temperature of the liquids in the boiler and the mixer jar),

1.  > **diagnostic** > **sensors** > **supply el.**

```

sensors
▷ supply el.:      free
  spot el.:       free
  bar el.:        free
  detergent:      ok
  MAP button:    inactive
  boiler:         42.1 °C
  mixer:          40.4 °C
  water meter
    
```


2. In the second line the state of the queried electrode is displayed. Press **start?** in water bo., **water HE or milk**. Use the lines below to dose a liquid feed component into the mixer jar and to check whether the corresponding electrode shows reaction. To subsequently empty the mixer jar, in **mixer: empty?** press .

```
supply electrode
▷ state:                free
  milk:                 start?
  water HE:             start?
  water bo.:           start?
  mixer:                empty?
```

- **V** Water meter: Here you can check whether the water meter is working properly. To do so, open the water valve. In **pulses** the pulses of the water meter are displayed. To subsequently empty the mixer jar, in **mixer: empty?** press .

```
water meter
▷ pulses:                23
  water HE:             start?
  water bo.:           start?
  mixer:                empty?
```



Note: Changes in state or temperature are immediately displayed. Consequently, fault occurrence is narrowed down.

10.4 Checking the stations

This menu is structured as follows:

- Feeding stations (F-stations)
- **C** Concentrate stations (C-stations)

```
stations
▶ feed
  concentrate
```



In addition, you can check the animal scales (SC) – if available – mounted in the corresponding station.

10.4.1 Feeding stations

Here you can

- > check, whether the identification of the feeding station is working properly,
- > **P** **+** start the servo pump,
- > **V** **+** open the teat slider,
- > **V** **+** close the gate of CalfProtect,
- > open the box valve,


```
stations
▶ feed
  concentrate
```

- >  check whether the feed sensor of the gradient or the servo control is active/inactive,
- > view the control unit allocated to the feeding station,
- > check the animal scales allocated to the feeding station.
- > If the feeding station is an Intelligent Feeding Station (IFS) or an IFS-compact unit, the CAN-bus-address can be transferred to this control of the feeding station(s) resp. the concentrate station (see **4.8.1.2 IFS-F(eeding stations)**, page **61** or see **4.8.1.3 IFS-compact unit for four feeding stations**, page **63** resp. see **4.8.2 IFS-concentrate stations**, page **65**). To do so, in **search?** press .

```

<F-station 1>
▷ no. ‡:          1456
  pump:           start?
  teat slider:    open?
  Calf Protect:   close?
  feed sensor:    active
  control:        [IFS-F 1]
  scales
  search?

```

1.  > **diagnostic** > **stations** > **feed** > **F-station 1...**
2. To check the identification (antenna test), hold a transmitter within the range of the antenna. The line **no. ‡** displays the transmitter number.



Note: If the transmitter number is not identified, proceed as follows:

1. Check in the setup whether the correct identification system has been selected.
2. Check the data lines between the antenna and the automatic feeder for damages.
3. Check in the setup the allocation of the station where the identification causes problems.


10.4.2 Concentrate stations

Here you can

- > check whether the identification of the concentrate station is working properly,
- > start the motor of the concentrate station,
- > view whether the feed bowl is currently full or empty,
- > view the control unit allocated to the concentrate station,
- > check the animal scales allocated to the concentrate station,
- > retransfer the CAN-bus-address to the concentrate station.

```
<C-station 1>
> no. #:          945637
  motor:          start?
  feed bowl:      full
  control:        [IFS-C 1]
  scales
  search?
```

10.4.3 Animal scales

If an animal scales is allocated to the feeding or the concentrate station, in **diagnostic** the menu **scales** will be displayed for this station. Press  in this line to access a submenu. Here you can

- > view the scales control allocated to the scales,
- > carry out a test weighing,
- > tare the scales,
- > calibrate the scales.

```
<F-station 1>
...
▶ scales
  search?
```

```
scales
> alloc.:        SC 1/2
  weigh?
  tare?
  calibrate?
```







10.5 Control

In **control** (see **12 Failures and warnings**, page **171**) you can view how often:

- the automatic feeder was without current (**power failures**),
- the control of the automatic feeder fell back on internal back-up after memory error occurred (**Reset**),
- the connection to the **terminal** was faulty,
- a **database** error occurred,

```
diagnostic
  valves
  motors
  heating
  sensors
  stations
▶ control
  version
  setup
  software
```


- the connection to an IFS-feeding station, an IFS-compact unit, an IFS-concentrate station, an animal scales or a scales control was faulty,
- the identification of the IFS-feeding station, the IFS-compact unit or the IFS-concentrate station was faulty,
- the minimum temperature in the boiler/HE was not achieved (**heat up**),
- the water or milk check was negative (**water shortage** or **milk shortage**),
- the mixer could not be emptied via the mixer draining valve (**mixer emptying**),
- the functioning of the **heating** was faulty,
- the **water meter** provided faulty values,
- faults occurred during automatic mixer and heat exchanger cleaning (**cleaning**),
- heat exchanger checking failed (**HE not filled**),
- the milk or the circulation valve did not close properly (**milk/circ. valve**),
- the **temperature sensors** in the **boiler** and the **mixer** did not provide plausible values,
- the **temperature** of the boiler water was **too high**, e.g. if the automatic feeder is provided with warm water,
- the **supply electrode** was grounded before preparation of a feed portion or at the beginning of heat exchanger cleaning,
- the automatic feeder could not commute to the automatic mode because e.g. the liquid and the powder feed components, the additive and the detergent were not calibrated (**calibration**).

-   compatibility problems between the program version of the automatic feeder and the IFS arose (**ID**),
- the same CAN-bus-addresses were allocated to the machines (**double address**),
- a connection fault with the  **ID-chip** occurred,
- **unknown transmitters** were detected by the identification,
- a message was given that an animal number has already been allocated (**double animal no.**),
- the **circulation pump** check was negative,
- the  **detergent** sensor signalled „empty“,
- the motor shaft did not turn (,),
- the sensor for empty signal did not signal „covered“ although the unit for feed dispense had turned (,),

1.  > **diagnostic** > **control**

2. Select the failure that occurred.




3. In **since** you can view when the inputs were deleted last.

4. Confirm **delete?** with  to delete the faults.

```
<power failures>
  amount:                2
  since:                  30.04.09
  ▶ delete?
```

10.6 Version








In **Version** you can check the version numbers of the following units:

- the automatic feeder,
- the procesor,
- the  ID-chip,
- the  terminal,
- the identifications of all the available feeding and  concentrate stations


```
diagnostic
  valves
  motors
  heating
  sensors
  stations
  control
  ▶ version
  setup
  software
```

- as well as all the peripheral devices. In that case, the program version of the application as well as the version of the mini-bootloader and, if available, of the bootloader are displayed.

The versions of the following peripheral devices can be checked:

-   control(s) of the IFS-feeding station(s)
-   control(s) of the IFS-compact unit(s)
-  control(s) of the IFS-concentrate station(s)
-   control(s) of the scales.

To display the version, proceed as follows:

1.  > **diagnostic** > **version**
2. Move to the desired submenu and read the version number.

```
device
▶ PRG: H IV      05.11
  MBL: MBL32    01.02
  BL : BL32     01.12
```

```
diagnostic
▶ device
  processor
  ID-chip
  terminal
  identification
  periph. devices
```

10.7 Setup

Here you can check the settings you selected in the setup. Here the settings cannot be changed.

1.  > **diagnostic** > **setup**
2. If you want to change the settings, see **4.1** Overview of the menus in the setup, page **55**.

```
setup
▶ language:      English
  machine
  equipment
  heating
  identification
  ID-chip
  stations
  terminal
  communication
```

10.8 Software

This menu is intended exclusively for the development department of the manufacturer. For you, dear customer, it is of no significance.

1.  > **diagnostic** > **software**

```
diagnostic
...
▶ software
```

11 Animal control

If you press , the following menu will be displayed:

- Entitled
- Alarm
- Plan over
-  Additive
- Marked
- New
- Double
- Unknown
- All
- Total consumption
- Print

```
animal control
▶ entitled:      15
  alarm:        3
  plan over:    4
  additive:     50
  marked:       2
  new:          0
  double:       0
  unknown:      0
  all:          56
  total consumption
  print
```

For each menu the number of animals is displayed. In **print** you can manually start printing of the alarm animal and the feed list.



Note: Please consider the documentation of the peripheral devices, if required.

11.1 Checking the complete animal group or specific animals

All gives you a general overview of the feeding behavior of all animals.

In **marked** you can check the feeding behavior of specific marked animals.

The displays of **all** are hereinafter exemplified.



The first line shows the animal number, the plan tendency and the feed quantity determined in the feeding plan for the current day.

```

animal control
...
▶ all:                56
...
    
```

2. Select the desired animal.

In the following lines you can check the values of:

- **Feed consumption** in % of today (value in the left column) and yesterday (value in the right column)
- **Break-off** today and yesterday
- **Feeding speed** today and yesterday
- Number of **visits to the feeding station** today and yesterday
- **Feeding day**

```

< 20/A1 >    ↘ 8.0 L
▶ !cons. %:   25  100
  break:      1    0
  speed %:    85  100
  visit:      1    6
  feed. day:  8
    
```

11.1.1 Checking feed consumption

1. > all > cons. %

2. Select the desired animal.

The first display line shows the animal number, the plan tendency and the feed entitlement of the current day.

```

< 20/A1 >    ↘ 8.0 L
▶ !cons. %:   25  100
  break:      1    0
  speed %:    85  100
  visit:      1    6
  feed. day:  8
    
```

The second display line is variable. Four display variants are available:

Variant 1

The animal is entitled to feed. The following is displayed: the time as of which the animal is entitled to feed and the feed quantity saved until check time.

```

< 20/A1 >    ↘ 8.0 L
▷ as of 04:00  3.2 L
  cons. %:    20  100
...
    
```

Variant 2

The animal is not entitled to feed (here: till noon).


```

< 20/A1 >    ↘ 8.0 L
▷ till 12:00   0.0 L
  cons. %:    50  100
...
    
```


VARIANT 3

The animal has saved more feed than it is allowed to consume all at once. If this animal consumes up to the maximum feed quantity, it is subsequently blocked for two hours. The display shows the time as of which the animal is allowed to be fed again.

```
< 20/A1 > 8.0 L
▷ till 11:38 block
cons. %: 100 100
...
```

 **Note:** To delete feed blocking, press . Confirm **delete blocking?** with .


```
block
delete?
```

VARIANT 4

The animal has saved more feed than it is allowed to consume all at once: If the animal does not consume the maximum quantity, the display will show the time up to which the difference between consumed and maximum quantity is available.


```
< 20/A1 > 8.0 L
▷ till 11:38 max. 1.5 L
cons. %: 45 100
...
```

3. In **cons. % as well as cons. L** the display shows the absolute quantity consumed on the current (left column) and the previous day (right column).

 **Note:** If the consumed feed quantity of the current day must be set to zero (0), press . Confirm **delete consumption?** with .


```
consumption
delete?
```

In **feed** the display shows the feed quantity to which the animals are resp. were entitled today (left column) and yesterday (right column).

 **Note:** In **feed** you can change the feed quantity by entering deviations.

```
< 20/A1 > 8.0 L
▶ till 12:38 0.0 1
cons. %: 100 100
cons. L: 3.6 8.2
feed: 8.0 8.2
conc.g/L: 135 135
milk %: 100 100
```

4. In **conc. g/L** the feed concentration of today (left column) and yesterday (right column) is displayed.

 **Note:** Here, too, you can enter corrections.

5. In **milk %** the milk ratio of the feed portion of today and yesterday is displayed.



Note: **Milk %** is only displayed if the automatic feeder is working in the **MP/milk mode**.

11.1.2 Checking the feeding break-offs

1.  > **all** > **break off**

2. Select the desired animal.

```
< 20/A1 > 8.0 L
!cons. %: 25 100
▶ break off: 1 0
...
```

Without additive dispenser

3. In **break off** the display shows how often the animals broke off feed consumption today (left value) and yesterday (right value).

With additive dispenser

4. In **w. additive** you can view how often the consumption of feed with additive has been broken off. In **no additive** you can view how often the consumption of feed without additive has been broken off.

```
< 20/A1 > 8.0 L
▶ w. additive: 1 0
no additive: 0 0
```



Note: **W. additive** and **no additive** are only displayed if the automatic feeder is equipped with an additive dispenser.

11.1.3 Checking the feeding speed

1.  > **all** > **speed %**

2. Select the desired animal.


3. In **rel. %** the feeding speed for today (left value) and yesterday (right value) is displayed as a percentage.

4. In **abs. L/min** the absolute feeding speed for today and yesterday is shown.

```
< 20/A1 > 8.0 L
!cons. %: 25 100
break off: 1 0
▶ speed %: 85 100
visit: 3 6
feed. plan: 8
```

```
< 20/A1 > 8.0 L
▶ rel. %: 80 100
abs. L/min: 1.00 1.00
```


11.1.4 Checking the visiting behavior

1.  > **all** > **visit**
2. Select the desired animal.
3. In **last** you can view when the animal visited the feeding station last on the current day.
4. In **entitled** you can check how often the entitled animal visited the feeding station.
5. In **not entit.** you can check how often a non entitled animal visited the feeding station.

```
< 20/A1 >  ↘ 8.0 L
!cons. %:   25  100
break off:   1   0
speed %:    80  100
▶ visit:    3   6
feed. day:   8
```

```
< 20/A1 >  ↘ 8.0 L
▷ last:      14:09:20
entitled:    2   4
not entit.:  1   2
```

11.1.5 Checking the feeding day

-  > **all** > **feed. day**
- Select the desired animal.
- In **correct** you can enter the correction days.

The following lines allow you to check:

- **Plan day**
- **Plan end** (feeding plan)
- **Feed** (current day quantity)
- **Concentration**
- **Milk ratio** (is only displayed with MP/milk mode)

```
< 20/A1 >  ↘ 8.0 L
!cons. %:   25  100
break off:   1   0
speed %:    80  100
visit:      3   6
▶ feed. day:  8
```

```
< 20/A1 >  ↘ 8.0 L
▷ feed. day:  8
correct:      0 days
plan day:     8
plan end:    73 days
feed:         8.0 L
conc.:       135 g/L
milk ratio:   100 %
```

11.2 Checking the entitled animals

Entitled animals are defined as those animals which are still entitled to feed. In the menu **entitled** the following is displayed:

- the absolute and the relative quantities consumed by all the entitled animals,

```
animal control
▶ entitled:      15
...
```

- how often entitled animals broke off feed consumption (with/without additive),
- how often entitled animals visited the feeding station (with/without feed entitlement) and when they stayed in the feeding station last.

```
< 20/A1 > 8.0 L
▶ till 12:38 0.0 L
  cons. %: 100 100
  cons. L: 3.6 8.2
  break off: 1 0
  visit: 3 6
```



Note: Proceed as with **all**.

11.3 Checking the alarm animals

An animal becomes an alarm animal when the set threshold values for one or more of the following parameters for today and yesterday are above or below target (see **8.4 Alarm levels**, page **122**).

- Feed consumption (as a percentage of the day quantity)
- Number of break-offs
- Feeding speed


```
animal control
  entitled: 15
▶ alarm: 2
  plan over: 1
  ...
```

```
!< 20/A1> 8.0 L
▷ cons. %: 25 100
  break off: 3 0
  speed %: 87 123
  delete all?
```



Note: Proceed as with **all**.

Deleting the animals with alarm messages

1.  > **alarm**
2. Select the desired animal.
3. Confirm **delete all?** with .

```
< 20/A1 > 8.0 L
  cons. %: 25 100
▷ delete all?
```



Note: The alarms of the current feeding day can be deleted only on the next day.

11.4 Checking the animals with expiry messages

The day before a temporary action (such as e.g. deviations of the feed quantity) expires, an expiry message for the corresponding action will be displayed.

The following expiry messages may appear:

End of the feeding plan

If the feeding plan expires, the animals are not fed anymore.

End of the concentration plan

If the concentration plan expires before the feeding plan, the feed concentration fed last will be maintained until the end of the feeding plan.

End of an additive or electrolyte prescription plan

If the additive or electrolyte prescription plan expires, the animals are not given additive anymore.

Deviation plans

If the deviation plan for feed, concentration, electrolyte or additive expires, the animal will be fed again according to the feed, concentration, electrolyte or additive plan of the corresponding group.



Note: Press to hide the message. The message will reappear on the next day and can be deleted by repressing .

Proceed as with **all**.

```
animal control
  entitled:          15
  alarm:             2
▶ plan over:        1
  ...
```

```
< 20/A1 >  ↘ 8.0 L
  feed plan
▶ delete all?
```

```
< 20/A1 >  ↘ 8.0 L
  concentration plan
▶ delete all?
```

```
< 20/A1 >  ↘ 8.0 L
  additive prescr. 2
▶ delete all?
```

```
< 20/A1 >  ↘ 8.0 L
  deviations feed
  deviations conc.
  deviations additive
▶ delete all?
```

11.5 Checking the animals to which additive is administered

The control menu **additive** is only displayed if the automatic feeder is equipped with at least one additive dispenser and at least one animal is fed with additive.

```
animal control
  ...
▶ additive:          50
  ...
```

> In **additive 1** resp. **additive 2** you can view according to which prescription plan the additive is or was administered to the animal.

```
< 20/A1 > 8.0 L
▶ additive 1: P1 P1
  additive 2: no no
  break off: 0 0
```

> If you open one of the two menus, you can terminate additive dispense (**dispensed no**) or enter another additive prescription plan.

> Moreover, you can check or/and change the following values:

```
< 20/A1 > 8.0 L
▶ dispensed: [ EL]
  dosage: 40 g/L
  EL: 2.0 L
  feed: 1.5 L
  day w. add.: 3
```

> The relative (%) and absolute (L) feed **consumption** today and yesterday,

> How much **additive** has been dispensed to the animal today and yesterday,

> Additive **dosing**: Press if there is need to change dosing,

```
< 20/A1 > 8.0 L
▷ deviations: [ 3] days
  qty: 10 g/L
  prescr.: 40 g/L
  dosing: 50 g/L
```

> **Weight**: press if you want to change calf's weight,

> How long the animal has already received additive can be viewed in **day w. add.** To extend or shorten additive dosing, press (**correct**). The prescription day corresponds to the corrected day with additive.

```
< 20/A1 > 8.0 L
  day w. add.: 3
▷ correct: [ 1] days
  prescr. day: 4
  prescr. end: 10 days
```

> In **break off** you can view how often feed consumption with / without additive has been broken off.

```
< 20/A1 > 8.0 L
▷ w. additive: 1 0
  no additive: 0 0
```



Note: Proceed as with **all**

11.6 Checking newly housed animals

This menu shows the newly registered animals. Here you can view different information resp. carry out animal-specific changes. You can

- > adjust the **animal no.** and move the animal to another **group**.
- > enter deviations in **feed** and **conc(entration)**.
- > check the milk ratio.
- > select and adjust a prescription in **additive**.
- > change calf's weight in **weight**.
- > press in **plan day** to access a submenu. There you can view the following information resp. change the values:

```
< 5562/A1 >  ▾  6.0 L
no.:          2213258
animal no.:   5562
group:        A
feed:         6.0 L
conc.:        135 g/L
milk ratio:   100 %
additive 1:   no
additive 2:   no
weight:       48 kg
▶ plan day:   8
time:         13:24:54
date:         29.04.09
confirm?
```

- > In **feed. day** the number of days passed by since registration is displayed.
- > In **correct** enter the desired number of days.

```
< 5562/A1 >  ▾  6.0 L
▷ feed. day:  8
correct:      0 days
plan day:     8
plan end:     73 days
feed:         8.0 L
conc.:        135 g/L
milk ratio:   100 %
```

- 👉 **Note:** If you want to **extend** the total duration of feeding, enter a **negative figure**. If you want to **shorten** it, enter a **positive figure**.

In the following lines you can check:

- > animal's **plan day** after correction,
- > when the **plan end** is achieved,
- > the **feed** quantity and feed **concentration** fed to the animal today,
- > the current **milk** ratio of the feed portion.
- > **Date** and time of animal's registration.
- > In **confirm** press to delete the animal from the list of the newly registered animals.



Note: The animals displayed in **new** are registered and can be fed. The confirmation is intended for deletion of the corresponding animal from the menu **new**. If you do not confirm, after two days the data will be automatically deleted from the menu **new**.

11.7 Checking double animal numbers

During the all-automatic registration process, in individual cases, double allocation of animal numbers may occur. In the menu **double** you can therefore adjust the corresponding animal numbers.

1. Select an animal number for the displayed animal which has not been allocated to an animal yet.



Example: The number 6575 has been allocated to the animal all automatically. After manual change, now the number is 6579.

2. In **confirm?** press .

```
animal control
...
▶ double:                1
...
```

```
< 6575/A1 > ↗ 8.0 L
no.:                    1836575
▶ animal no.:           [ 6579 ]
time:                   15:23:27
date:                   29:04:09
confirm?
```

11.8 Checking the unknown transmitters

The warning **unknown** is displayed when

- the identification detects a transmitter which is not allocated to any of the animal numbers
- a transmitter number is allocated to an animal number but not registered yet

1. > **unknown**

2. Here you can

```
animal control
...
▶ unknown:                2
...
```


- > view how many and which transmitter numbers are referred to
 - > check on which day and at which time the transmitter numbers have been detected by the identification last
 - > delete the transmitter numbers, if necessary.
3. To delete the warning, confirm **delete?** with .
 4. To register an animal with this transmitter number, press in **register**. Then, register the animal in the displayed menu.

```
< 1836575>
no.:          1836575
amount:       3
time:         12.01.07
date:         15:48:20
▷ delete?
register
```

11.9 Checking the total consumption

In this menu you can check the total consumption and the consumed quantities of each individual animal.

1. > **total consumption**

If in **total** you press , the calculated (**set**) and actual (**act.**) quantities consumed by all animals today, yesterday and the day-before-yesterday are displayed.

```
animal control
...
▷ total consumption
print
```

```
<MP>
                set  act.
▷ t.kg:         7.6  2.4
y.kg:          6.3  5.9
b.kg:          6.4  5.8
```

2. If in **animal** you press , the feed and additive amount consumed by each individual animal will be displayed. The consumed quantities are summed up starting from registration till removal.

```
< 6575/A1 > ↗ 8.0 L
▷ MP:           7 kg
milk:           0 L
additive 1:     0 g
additive 2:     656 g
```


12 Failures and warnings

When a **failure** occurs, the **automatic mode is broken off**. The display shows the corresponding failure message and the green LED on the hand-held terminal starts flashing.

Warnings signal a problem but they **do not break off the automatic mode**. Also with warnings the LED starts flashing.



Note: Those warnings which have been deleted or hidden with `Esc` will be automatically displayed again after one further warning has been displayed but anyway after ten minutes at the latest.

Various warnings and failures are automatically deleted as soon as the fault has been removed. Some of them are deleted only after you have pressed `C` or `Enter` in **delete failure?** resp. **delete warning?**.

Irrespective of the failures and warnings, messages are generated e.g. by hand-held terminal or the bootloader of the automatic feeder control and displayed on the screen. These messages are explained in section „**Other failures and messages**“.



Note: Please consider the documentation of the peripheral devices, if required.

12.1 Failures


12.1.1 CRC-error

If the memory datasets of the automatic feeder control have been destroyed, the message on the right will be displayed.

```
failure
CRC-error
```

The reason for this failure may be strong electromagnetic discharges. The battery for data buffering of the CPU may also possibly be empty.

The following CRC-errors can be displayed:

- check animal
 - check device data
 - check plans
 - check prescriptions
1. Press until the message is not displayed anymore.
 2. Check the corresponding datasets. If errors are obvious, the program must be reset.
 3.  > **device data** > **new installation**
 4. In **everything** press and confirm the message on the right with .

```
all
new installation?
```



Note: At „new installation“ all user-specific data are deleted and replaced by default values.

5. If the failure reappears, the automatic feeder should be checked by service personnel.

12.1.2 Heating

If the actual value of the boiler water falls below the minimum temperature, feeding will be broken off until the temperature is equal to or higher than the minimum temperature.

The potential reason for it may be the following: the feed is consumed so rapidly that the time needed by the boiler to heat up the water is not sufficient.

If there is no explanation for the failure, service personnel should check the automatic feeder for lime deposits resp. other sources for defect.

The failure message on the right is displayed:

```
failure
  heating      xx.x °C
```

> Check the heating.

> Also check the temperature value in the mixer for **min. temp.**

12.1.3 Temperature too high

If the temperature of the boiler water is too high, the failure message on the right will be displayed.

```
failure
▶ temperature too high
```

1. Press to check the temperature.
2. In **water bo. start?** keep pressed. Drain the boiler water into the mixer until the displayed failure message disappears.
3. To empty the mixer, in **mixer: empty?** press .

```
temperature too high
▷ boiler:      xx.x °C
  water bo.:   start?
  mixer:       empty?
```

If you provide the boiler with pre-heated water, please check whether the temperature of the supplied water is too high.

If there is no explanation for the failure, let service personnel check the automatic feeder.

12.1.4 Heat exchanger not filled

At start-up of the automatic feeder the control checks whether the heat exchanger is filled with water. If this check fails, feeding will be broken off.

```
failure
▶ HE not filled
```

1. Check the water supply.
2. In **HE fill?** press .
3. Check whether the **V** supply electrode resp. the **C** bar electrode is touched by the water jet during heat exchanger filling and the display shows „covered“.
4. Check, if necessary, whether the **V** supply resp. the **C** bar electrode are touched by the water jet when pressing in **water bo. start?**

```
HE not filled
▷ HE:          fill?
  mixer:       empty?
  water HE:    start?
```



Note: **C** Check whether the stop valves and the draining valve are tight. If some liquid in the mixer is drained via one of these valves, the bar electrode may not be grounded anymore.

12.1.5 Water shortage

If the **C** bar resp. the **V** supply electrode is not grounded in the mixer jar during water dispense and the **V** water meter does not transmit any pulses, the device will start a water check. If water check fails, feed preparation and animal identification will be switched off.

- > Press in **water bo. start?**.
- > Press in **water HE start?**.
- > Check whether the water jet touches the **C** bar electrode resp. the **V** supply electrode.
- > Check the water supply to the automatic feeder.
- > Press in **delete failure?**.
- > **Exclusively for electricity specialists:** Check the sensitivity of the electrode:


The **sensitivity** of the electrode is:

- **too high**, if the electrode signals **covered** though it is actually free.
- **too low**, if the electrode signals **water shortage** though it is covered.

```
failure
▶ water shortage
```

```
water shortage
▷ water bo.:      start?
  water HE:      start?
  bar el.:       start?
  supply el.:    free
```

Increasing/reducing the electrode sensitivity



Danger! Hazardous voltage! Pull the mains plug.

To increase the sensitivity of the electrode, turn the potentiometer (see wiring diagram) located on the motherboard clockwise. To decrease the sensitivity of the electrode, turn the potentiometer counterclockwise.

12.1.6 Water meter

This failure message is displayed if during water dispense

- the supply electrode is grounded,
- but the water meter does not transmit any pulses.

The water meter should be checked and replaced, if necessary, by **service personnel**. Feeding can be carried on as an emergency operation.

1. In **water HE start?** press , then in **water bo. start?** press and check whether the pulses are displayed.
2. In **mixer emptying?** press .
3. Confirm **delete failure?** with .
4. Confirm **emergency operation start?** with .
5. The warning **water meter** will be displayed. At the same time, the calibration values for boiler water become invalid. The failure message on the right will be displayed.
6. Calibrate **water bo(iler)** and **water HE**. After that, the failure message will disappear. The automatic feeder will start the emergency operation.
7. If the water meter works properly again or has been replaced, delete the warning **water meter**. The failure messag-

```
failure
▶ water meter
```

```
failure
▷ pulses:
  water HE:      start?
  water bo.:      start?
```

```
emergency operation
start?
```

```
failure
▶ calibration
```

es **calibr. water bo. and calibr. water HE** are displayed again

8. Calibrate both liquid feed components.
9. Move to the default automatic mode.

12.1.7 Mixer emptying

If the cleaning water cannot be drained off the mixer because the drain is e.g. clogged, the failure message on the right will be displayed. Feeding will be broken off until the failure has been removed.

```
failure
▶ mixer:          empty?
```

- > Check all feed-supplying components leading from the mixer to the mixer draining valve or from the mixer to the teat for clogging and remove potential obstructions.
- > Check the feeding pump. In **feed. pump: start?** press .
- > Check the mixer draining valve (if available). In **mixer drain: open?** press .
- > Check the bar electrode.
- > In **water bo.: start?** press to fill the mixer with some water.
- > In **mixer: drain?** press .
- > As soon as the failure has been removed, confirm **delete failure?** with .

```
mixer emptying
▶ feed. pump:      start?
  mixer drain:    open?
  water bo.:      start?
```



Warning: Before recommissioning the automatic feeder it is imperative to remove all detergent residues in order not to put animals' health at risk.



Caution: It is imperative not to extend the hose that leads from the mixer draining valve to the drain!

12.1.8 Heating

If the heating does not work properly, the reasons for it may be the following:

- > In **on?** press . Check whether the displayed temperature increases.
- > If the temperature increases, in **delete failure?** press .


```
failure
▶ heating
```

```
heating
▷ on?
boiler:      xx.x °C
delete failure?
```


Exclusively for service personnel:

- The heating element is defective.
- > Check the heating element for continuity.
- The temperature sensor is defective.
- There is no voltage on the heating.
- > Check the on-site fuses, if necessary.
- The safety temperature limiter is triggered. To reactivate it, proceed as follows:


1. In **delete failure?** press .



2. Pull the mains plug. For those devices with fix power connection, switch the main switch off and be sure the device is free of voltage before getting close to live parts.



3. Open the right lateral door of the automatic feeder. Remove the metal covering.



4. Push the Reset-button to reset the safety temperature limiter.

5. Secure the metal covering and close the lateral door.
6. Only then, plug in the mains plug or turn the main switch to position ON.

12.1.9 Boiler temperature sensor

If the temperature sensor in the boiler is defective, the failure message on the right is displayed.

```
failure
▶ boiler sensor
```

- If in **boiler** or/and **mixer** 0.0 °C is displayed, it can be assumed that the data line is interrupted. If 99.9 °C is displayed, it can be assumed that a short circuit occurred.

Exclusively for service personnel:

- > Remove the plug from the motherboard and measure the resistance of the sensor.
- > If the measured value deviates from the value contained in the table, the sensor must be replaced (see wiring diagram of the machine).

```
boiler sensor
▷ boiler:      xx.x °C
  mixer:      xx.x °C
```

12.1.10 Milk/circulation valve

If the failure **milk/circ. valve** is displayed, it can be assumed that the milk valve or the circulation valve is untight.

```
failure
▶ milk/circ. valve
```







1. Carry out a function and visual check of both valves.
2. In **milk pump start?** press . If, after the pump has started, some liquid flows out of the milk/water outlet, one of the two valves is untight.
3. Let service personnel check and replace the valves, if necessary.
4. Once the failure has been removed, in **delete failure?** press .

```
milk/circ. valve
▷ milk pump:    start?
  milk:        start?
  cleaning:    start?
```

12.1.11 Milk empty

1.  > **device data** > **milk values** > **machine stop**



If in **milk values** you select **machine stop**, the feeding process will be broken off as soon as the milk tank is empty.

2. Replenish the milk tank and press .
3. In **milk: suck in?** press  and wait until the milk flows out of the outlet bubble-free thus effecting that the  supply electrode resp. the  bar electrode continuously signal „covered“.
4. Once the reason for failure has been removed, in **delete failure?** press .
5. Confirm **milk filled?** with .

```
failure
▶ milk empty
```

```
milk empty
▷ milk:          suck in?
  supply el.:    frei
  bar el.:       free
  delete failure
```

12.1.12 Calibration

The automatic feeder cannot commute to the automatic mode, if the liquid and powder feed components, the  additive and the  detergent have not been calibrated. The adjacent failure is e.g. displayed if the boiler water has not been calibrated.

This fault message also appears e.g. if you commute from the MP-mode to the MP/milk mode and directly move to the automatic mode without having calibrated the milk before.

> Calibrate the feed components and the .

```
failure
▶ calibration
```

12.1.13 Supply electrode

If the supply electrode is grounded before a feed portion is mixed or at the beginning of heat exchanger cleaning, the feeding mode is broken off and the message on the right is displayed.

```
<water boiler>
▷ start?
  set qty:      500 ml
  runtime:      6.0 s
```

```
failure
▶ supply electrode
```

1. Check whether the supply electrode is grounded (status = covered), when you press each in **milk start?**, **water HE start?**, **water bo. start?**.
2. In **mixer: empty?** press .
3. If the reason for failure has been removed, in **delete warning?** press .

```
supply electrode
▷ state:                free
  milk:                 start?
  water HE:             start?
  water bo.:            start?
  mixer:                empty?
  delete failure?
```

12.1.14 ID-chip

The automatic feeder is equipped with an electronic rating plate (ID-chip) indicating the device number and further important information about how to operate the automatic feeder. If the ID-chip is defective, you must replace it within 30 days, otherwise feeding will be broken off until the defective ID-chip has been replaced.

```
failure
  ID-chip missing
```

12.1.15 Station/draining valve

If a station valve or the mixer draining valve is untight, during the cleaning process water will get lost.

```
failure
  ▶ station/drain valve
```

- > Check all the **station valves** as well as the **mixer draining valve** for **tightness**. Clean the valves, if necessary. Foreign material may have been deposited, thus preventing the valves from closing completely.
- > If even cleaning does not bring any results, the corresponding valve must be repaired or replaced.
- > The bar electrode is possibly defective and must be replaced. In **water bo. start?** press and check whether the electrode signals „covered“.
- > If the reason for failure has been removed, in **delete failure?** press .

```
station/drain valve
▷ bar el.:              free
  water bo.:            start?
  mixer:                start?
  mixer:                drain?
```

12.1.16 IFS-version

In the parallel mode (SynchroFeed) at least one of the feeding stations supplied with feed at the same time is operated by a peristaltic pump together with the relevant IFS-control unit.

The software version of the IFS-control units used for parallel operation must be 5.00 (or greater).

```
failure
▶ incorrect version
```

```
<IFS-F 1 >
▷ version 5.00 or
  greater required
```



Note: This failure cannot be deleted. The IFS-control(s) must be updated to be operated in the parallel mode.

12.1.17 Output error

The control of specific relays is permanently monitored by an electronic protective device. If these relays are actuated for more than 60 seconds, a fault may be the reason for it. The fault message **output error** will be displayed and feeding is automatically broken off.

```
failure
  output error
```

1. Switch the automatic feeder off and after some seconds on again.
2. If the message reappears, you should contact service personnel.

This message is also displayed when a short circuit occurs on a cable connecting the automatic feeder to an external component (e.g. the antenna or the hand-held terminal).

Exclusively for service personnel:

1. Check the cable connections.
2. Replace the cable(s).

12.2 Warnings

12.2.1 Identification

If the identification system does not work, the message on the right is displayed:

- > Check the identification.
- > Check the cables leading to the antenna for visible damages.
- > Check whether in Setup the (correct) antenna is activated.

The warning is automatically deleted as soon as the fault has been removed.

```
warning
▶ identification
```

```
<identification>
▷ no connection
```

12.2.2 Incorrect ID

All CAN-nodes have a unique and unchangeable ID. The ID is used to automatically check whether the correct node responds to the CAN-address. If this is not the case, the automatic feeder is indeed able to communicate with the CAN-node but the data will not be transferred correctly.

- > Check all CAN-addresses.

Exclusively for service personnel

- > Update all CAN-nodes, if necessary, as for compatibility reasons the IDs may have been changed.

```
warning
▶ incorrect ID
```

```
<periph. device>
▷ ID: #####
```

12.2.3 Double address

If two or more automatic feeders are networked within the bus system, it may happen that an address is assigned twice.

1. In **double address** press .
2. The display on the right shows you the CAN-node (IFS) and its default CAN-address, which is available twice in the bus system.
3. Move to the setup and check the addresses of all CAN-nodes for double allocation.

```
warning
▶ double address
```

```
<IFS-F1>
▷ address [41]
delete warning?
```

4. To the node with the same CAN-address, allocate another still available CAN-address in the line **address**. You will find more detailed information about the different CAN-nodes in the following chapters:
 - IFS-feeding station: see **4.8.1.2** IFS-F(eeding stations), page **61**
 - IFS-compact unit: see **4.8.1.3** IFS-compact unit for four feeding stations, page **63**
 - IFS-C(oncentrate station): see **4.8.2** IFS-concentrate stations, page **65**
 - Scales control: see **4.8.3** Scales, page **66**
5. Delete the warning at all automatic feeders.



Note: If possible, use an address from the default range of numbers of this CAN-node.

12.2.4 IFS-F(eeding station)

One or possibly even both of the messages on the right are displayed if the automatic feeder is not able to communicate with the control of the IFS-feeding station via the CAN-bus. A reason for it may be that the CAN-node is switched off or the address of the IFS-F does not correspond to the one in the automatic feeder.

```
warning
▶ IFS-F single
  IFS-F quadruple
```

1. Activate the **search mode** at the IFS. To do so, briefly push the red round **button** located on the motherboard of the IFS. On the control unit for one feeding station (IFS-F single) the button is marked on the board with S1 (see the wiring diagram enclosed to this instruction manual). The green LED (marking with IFS-F single: ST1, with IFS-F quadruple: H4) blinks (10 times per second).

```
<IFS-F 1>
▷ search?
```

2. In **search?** press . The message on the right is displayed.

```
IFS-F
is being searched!
```

3. If the IFS is detected on the CAN-bus, the address will be transferred. The message on the right will be displayed. The green LED (ST1 or H4) of the IFS-motherboard does not blink anymore.

```
IFS-F
found!
```



Note: If you have activated the **search mode** by mistake, repress the button S5 or H4. The search mode will be **terminated**.

12.2.5 Motor F-station

This message is displayed if the motor of the IFS-feeding station does not deliver any counting pulses anymore. A potential reason for it may be the following:

```
warning
▶ motor F-station
```

1. The motor which starts the peristaltic pump does not run anymore. Press in the submenu **pump: start?** to check it.
2. The cable between the motor and the board used to transfer the pulses has been possibly removed or it may be defective.

```
<station 7>
▷ pump:          start?
```

12.2.6 IFS-C(oncentrate station)

This message is displayed if the automatic feeder is not able to communicate with the control of the IFS-concentrate station via the CAN-bus. A reason for it may be that the CAN-node is switched off or the address of the IFS-C does not correspond to the one in the automatic feeder.

```
warning
▶ IFS-C
```

see **4.8.2** IFS-concentrate stations, page **65**

```
<IFS-C 1>
▷ search?
```

12.2.7 Motor C-station

This message is displayed if the motor of the IFS-concentrate station does not deliver any counting pulses anymore. A potential reason for it may be the following:

```
warning
▶ motor C-station
```

1. The motor, which starts the auger of the concentrate feeder does not run anymore. Press in the submenu **motor: start?** to check it.

```
<station 7>
▷ motor:          start?
```


2. The cable between the motor and the board used to transfer the pulses has been possibly removed or it may be defective.

12.2.8 Scales (SC)

This message is displayed if the automatic feeder is not able to communicate with the scales control via the CAN-bus. A reason for it may be that the CAN-node is switched off or the address of the scales control does not correspond to the one entered in the setup of the automatic feeder.

```
warning
▶ scales
```

see 4.8.3 Scales, page 66

12.2.9 Water meter

see 12.1.6 Water meter, page 175

```
warning
▶ water meter
```

```
water meter
▷ pulses
  water HE:      start?
  water bo.:    start?
```

12.2.10 Mixer emptying

If the mixer cannot be emptied because e.g. the discharge is clogged or the feeding pump is defective, the warning on the right will be displayed.

```
warning
▶ mixer emptying
```

> Check all feed-supplying components leading from the mixer to the mixer draining valve resp. from the mixer to the teat for clogging and remove them.

```
mixer emptying
▶ feed. pump:    start?
  mixer drain:  open?
  water bo.:    start?
```

> Check the feeding pump. In **feed. pump: start?** press .

> Check the mixer draining valve (if available). In **mixer drain open?** press .

> Check the bar electrode.

> In **water boiler: start?** press to fill the mixer with some water.

> In **mixer: drain?** press .

- > Once the failure has been removed, press to confirm **delete failure?**.

This message disappears each time the bar electrode is free.

12.2.11 Mixer sensor

The warning **mixer sensor** is displayed if the temperature sensor in the mixer jar is defective or the temperature in the mixer jar falls below 0 °C.

```
warning
▶ mixer sensor
```

```
mixer sensor
▷ boiler:          xx.x °C
  mixer:          xx.x °C
```

12.2.12 Milk empty

1.  > **device data > milk values > continue with MP**

If in **milk values** you selected **continue with MP**, the feeding process will not be broken off when the milk tank is empty.

2. Replenish the milk tank and press .
3. In **milk: suck in?** press and wait until the milk comes out from the outlet bubble-free, thus effecting that the **V** supply electrode resp. the **C** bar electrode continuously signal „covered“.
4. In **delete warning?** press as the reason for the warning has been removed.
5. Confirm **milk filled?** with .

```
warning
▶ milk empty
```



```
milk empty
▷ suck in milk:  start?
  delete warning?
```

12.2.13 Unknown transmitters

The warning **unknown transmitters** is displayed when

- the identification does not detect a transmitter which has not been allocated to an animal number,
- a transmitter number has been allocated to an animal number but not registered yet.

```
warning
▶ unknown transmitters
```

1. The display shows how often the displayed transmitter number has been identified.
2. Moreover, the display shows when the transmitter has been detected by the identification last.
3. In **delete?** press , if the transmitter number has to be removed.
4. In **register** press , if the transmitter number has to be allocated to an animal number. Another display will be shown (see 7.2.1 Registering the animals manually, page 97).



```
< 1234567>
▷ no.:          1234567
  amount:         4
  time:          16:18:20
```

```
< 1234567>
▷ group:         [A]
  correct. days: 0
  additive 1:    no
```


12.2.14 Calibration

The warning **calibration** signals that the last calibration dates back 120 days.

```
warning
▶ calibration
```

1. Calibrate (depending on the displayed message) the liquid and powder feed components, the  additive and the  detergent.
2. Delete the warning.

```
<water boiler>
▷ start?
  set qty:        500 ml
  runtime:        6.0 s
```

 **Note:** If you delete the warning but do not subsequently calibrate, the message will reappear on the following day.


12.2.15 Automatic calibration

The warning **autom. calibration** indicates that during the last automatic calibration the determined value has not been taken over as it considerably differed from the current calibration value.

```
warning
▶ autom. calibration
```

1. Manually calibrate (depending on the display text) the station to which the warning refers (here: station 2).
2. Delete the warning.

```
<station 2>
▷ outside tolerance
  delete warning?
```

 **Note:** The limit of tolerance for takeover of the determined automatic calibration value can be changed in the calibration menu for the corresponding station.

12.2.16 Circulation pump

At midnight the control of the automatic feeder checks whether the circulation pump is working properly. If this is not the case, the message on the right is displayed.

```
warning
▶ circulation pump
```

Exclusively for service personnel

1. Open the right lateral door of the automatic feeder.
2. In **start?** press and check whether the circulation pump is audible. If this is not the case, check the circulation pump and replace it, if necessary.
3. To start a large functional test, in **check?** press .
4. As soon as the failure has been removed, in **delete warning?** press .

```
circulation pump
▷ start?
check?
delete warning?
```

12.2.17 ID-chip

If the electronic rating plate (ID-chip) is defective, you should replace it within 30 days, otherwise the feeding process will be broken off until the defective ID-chip has been replaced by a new one.

```
warning
ID chip xx d. left
```

12.2.18 Detergent

If the float switch of the detergent container signals „empty“, the message on the right is displayed.

```
warning
▶ detergent empty
```

1. Replenish the detergent container.
2. This message is automatically deleted when the detergent container has been filled.
 - Check the float switch for impurities and adhesions.


```
detergent empty
▷ pump: start?
detergent: empty
```

12.2.19 Double animal number

If during the all-automatic registration process the same animal number has been assigned twice, the message on the right will be displayed.

```
warning
▶ double animal no.
```

1. Change the animal number.
2. Press **confirm?** and to take over the changes .

 **Note:** Only after the animal number has been changed, the confirmation becomes effective and the warning is deleted.

```
< 2181/A1>↵6.0 L
▷ no.: 18372181
  animal no.: 2181
  time: 11:33:56
  date: 29.04.09
  confirm?
```

12.2.20 Machine capacity

If the storage space for the animal or transmitter numbers is exhausted, the message on the right is displayed.

```
warning
▶ machine capacity
```

Animal numbers

1. Cancel one or more animals.
2. Delete the warning.

```
machine capacity
▷ 250 animals only
  delete warning?
```

Transmitter numbers

1. Delete one or more transmitter numbers.
2. Delete the warning.

```
machine capacity
▷ full transm. memory
  delete warning?
```

12.2.21 Database

The message on the right is displayed if the database is faulty. For the causes and the handling, see **12.1.1 CRC-error**, page 171.

```
warning
▶ database
```

12.3 Further failures and messages

Exclusively for service personnel

12.3.1 Hand-held terminal

12.3.1.1 CAN bus off

If the message on the right is displayed, a short-circuit has possibly occurred. But also other failures, such as e.g. electromagnetic discharges may have a negative effect on the CAN-cable.

```
terminal Vxx.xx
CAN bus off
```

- > Check the CAN-bus for short-circuit resp. other failures and remove it/them.

12.3.1.2 CAN bus heavy

The reasons for the message on the right may be the following:

```
terminal Vxx.xx
CAN bus heavy
```

- Short-circuit
- > Check the CAN-bus for short-circuit.
- The terminator has not been mounted.
- > Check whether the terminators have been mounted correctly.
- The data line is interrupted.
 - The CAN-cable is clamped incorrectly.
 - There is no connection to the control of the automatic feeder.
- > Check whether the data line is wired correctly and the control of the automatic feeder is working properly.

12.3.1.3 Waiting

The reason for the message on the right is: The hand-held terminal is not initialized because

```
terminal Vxx.xx
waiting
```

- the CAN-bus address of the terminal does not correspond to the one configured in the setup of the automatic feeder.
 - the control of the automatic feeder is not active.
1. Start the search mode: Press when switching the automatic feeder on and keep the keys pressed.
 2. If the message reappears, you must check whether the control of the automatic feeder is working properly.

12.3.1.4 Searching

The reason for the message on the right is the following: The hand-held terminal is in the search-mode.



```
terminal Vxx.xx
searching
```

- > Check the function of the automatic feeder. If the message does not disappear automatically within approx. ten seconds, you must check the control of the automatic feeder.

12.3.2 Bootloader

12.3.2.1 Waiting for update

The reasons for the message on the right are the following:

- The control program of the automatic feeder is not executable.
- > Update the program by means of the UpdateManager.
- The bootloader has been activated at switch-on (by mistake).
- > If at switch-on of the automatic feeder you activated the bootloader by mistake by keeping the keys   pressed, you must restart the automatic feeder.

```
bootloader Vxx.xx  
waiting for update
```

12.3.2.2 Flash programming

This message is displayed when the program is being updated.

- > Wait until the update has been completed.

```
bootloader Vxx.xx  
flash programming
```

12.3.2.3 Starting program

This message is displayed when the bootloader starts the control program of the automatic feeder.

- > Wait until the program is started.

```
bootloader Vxx.xx  
starting program
```

12.3.3 Message when starting the automatic feeder

This message is displayed when the control program of the automatic feeder is started.

- > Wait until the automatic feeder is ready for operation.

```
High Vxx.xx  
starting program
```


13 Care and maintenance plan / Routine tasks

13.1 Automatic feeder in operation

	Care/maintenance interval			
	daily	wee kly	3-mo.	if required
Check the animals.	<input type="checkbox"/>			
Check the milk powder hopper and replenish it, if necessary.	<input type="checkbox"/>			
Clean the milk tank and the connecting hose. To clean the connecting hose to the automatic feeder, start the cleaning cycle.	<input type="checkbox"/>			
Replenish the milk tank.	<input type="checkbox"/>			
☛ Check the detergent container and replenish it, if required.	<input type="checkbox"/>			
Clean the mixer jar. If the automatic feeder is not equipped with the ☛detergent pump, manually start mixer cleaning and add some detergent. Use a brush to increase the cleaning efficiency.	<input type="checkbox"/>			
Check the milk powder hopper and the ☛additive dispenser outlet. Remove incrustations as they impair dosing accuracy. Observe the safety instructions contained in this instruction manual! Never touch the crushing hazard area as long as parts can move there. Never use your fingers to clean the milk powder outlets but use the tool contained in the scope of delivery!	<input type="checkbox"/>			
Check whether the teat is faultless.	<input type="checkbox"/>			

	Care/maintenance interval			
	daily	wee kly	3-mo.	if required
<p>Check the suction hoses for deposits. The suction hoses must be regularly checked for deposits. If you detect some deposits: 1. Select „suction hose cleaning“. 2. Start the cleaning cycle. 3. If after the cleaning process deposits are still visible in the suction hoses, you should manually clean the suction hoses (e.g. by means of a ● cleaning pistol). 4. If even this does not yield the desired result, replace the hoses. The suction hoses can also be cleaned continuously.</p>		<input type="checkbox"/>		<input type="checkbox"/>
<p>Cleaning cycle</p>		<input type="checkbox"/>		
<p>Sponge cleaning (exclusively in the MP/milk mode) Sponge cleaning must be carried out daily if the automatic feeder is not able to clean the heat exchanger all automatically. If the automatic feeder can clean the heat exchanger all automatically, activate sponge cleaning only if necessary. E.g. if you have not been using any detergent for one week or you are using a new detergent and are not sure of its cleaning efficiency.</p>	<input type="checkbox"/>			<input type="checkbox"/>
<p>Carry out calibration Carry out calibration at regular intervals but at least quarterly. Recalibrate milk powder, ● concentrate and ● additives at least each time you use a new batch or you change the product/manufacturer. Make sure that the powder outlets are free from deposits. ● The same applies to the feed bowl and the dosing flap of the concentrate feeder.</p>			<input type="checkbox"/>	
<p>● Check the concentrate feeder and replenish it, if necessary.</p>	<input type="checkbox"/>			
<p>● Check the animal scales, the cables and the holding devices.</p>		<input type="checkbox"/>		

13.2 Shutdown of the automatic feeder and the peripheral devices

	ok?
Empty and clean the milk powder hopper.	<input type="checkbox"/>
Close the cable inlets of the antennas by means of blind plugs. Moisture may penetrate into the control unit if the inlets are not closed.	<input type="checkbox"/>
Carry out circuit cleaning .	<input type="checkbox"/>
Drain the water from the boiler. Remove the water hose located between the water solenoid valve and the boiler and open the bleeder screw located at the boiler casing so that the water can drain off. When the boiler is completely empty, remount the water hose and tighten the bleeder screw.	<input type="checkbox"/>
Drain the water from the solenoid valves and the volume regulator. (In case of frost risk!)	<input type="checkbox"/>
🔧 Empty and clean the concentrate feeder. Remove the CAN-Bus-cable and the antenna cable.	<input type="checkbox"/>
🔧🔧 Demount the weighing platform and clean it. Remove the connecting cable of the scales control.	<input type="checkbox"/>
Pull the mains plug.	<input type="checkbox"/>
Store the devices in a frost-free location, if possible.	<input type="checkbox"/>

14 Check list for after-sales service




Note: Before starting up the automatic feeder, you must carefully read, understand and follow the information contained in the instruction manual with a particular focus on the safety instructions!

Start-up	
1.	Ground the automatic feeder.
2.	Advise the end user that the water must have drinking water quality. High lime or/and iron or/and manganese contents may lead to early wear.
3.	Advise the end user that the hose leading from the mixer draining valve (if available) to the outlet shaft must not be extended.
4.	Advise the end user that the machine and the cables must be protected against sunlight.
5.	Connect the water and milk supply.
6.	Mount the race-way and the feeding station.
7.	Connect the antennas.
8.	Install the concentrate station (including the antennas) and fill the concentrate container.
9.	Install the animal scales: Install the scales control(s), mount the weighing platforms in the stations.
10.	Install the suction hoses.
11.	Replenish the milk powder hopper and the milk tank.
12.	Plug in the mains plug.
13.	Switch the automatic feeder on.
14.	Fill the boiler with water.
15.	Adjust the target and the minimum temperature of the heating (in the menu device data - portion).
16.	Check the switch position of the heating cable, the vapor screen and the mixer jar heating (in summer: 0).
Setup	
1.	Push the control switch resp. turn the main switch to switch the automatic feeder off and immediately afterwards on while keeping pressed.
2.	Check the following settings:
2.1	Language
2.2	Date and time and adjust them, if necessary
2.3	Machine
2.4	Enter the Squelch value.
2.5	Equipment
2.5.1	Mixer draining valve available yes/no (serial equipment)
2.5.2	Feeding pump available yes/no
2.5.3	Additive dispenser 1/2 Powder or Liquid available yes/no
2.5.4	Detergent pump available yes/no
2.5.5	Detergent sensor none/internal/external








2.5.6	<input checked="" type="radio"/> Circulation valve available yes/no
2.5.7	<input checked="" type="radio"/> Cleaning valve available yes/no
2.5.8	<input checked="" type="radio"/> <input checked="" type="radio"/> Air valve (pulsating compressed air cleaning) available yes/no
2.5.9	Circulation pump available yes/no
2.5.10	Mixer sensor available yes/no
2.5.11	<input checked="" type="radio"/> Water meter available yes/no
2.5.12	<input checked="" type="radio"/> Spot and supply electrode available yes/no
2.5.13	<input checked="" type="radio"/> MilkMaker-dispensing unit available yes/no
3.	Heating activated yes/no - Relay <input checked="" type="radio"/> mechanical/ <input checked="" type="radio"/> electrical
4.	Select the identification system, if necessary.
5.	<input checked="" type="radio"/> ID-chip
6.	Stations
6.1	Activate the internal feeding station(s) controlled by the automatic feeder.
6.2	<input checked="" type="radio"/> <input checked="" type="radio"/> Configure the IFS-feeding station(s). Select the options, if available. Allocate the CAN-bus address to the IFS-feeding station(s): To do so, put the IFS (feeding station) in the search-mode and allocate the address via search?.
6.3	<input checked="" type="radio"/> <input checked="" type="radio"/> Configure the IFS-compact unit(s) and assign the CAN-bus address: To do so, put the IFS-compact unit in the search mode and allocate the address via search?. Allocate each of the four pumps to a station and the equipment of the station.
6.4	<input checked="" type="radio"/> Configure the IFS-concentrate station 1(...). Select the type of concentrate and of concentrate feeder. Assign the CAN-bus address: To do so, put the IFS (C-station) in the search mode and allocate the address via search ?.
6.5	<input checked="" type="radio"/> <input checked="" type="radio"/> Configure the scales control 1/x. To do so, select the CAN-address via the DIP-switch on the scales control board and enter the selected address into setup. Activate the available weighing units (1/2).
7.	Terminal
8.	Communication
8.1	PC serial/CAN, Institute yes/no
8.2	<input checked="" type="radio"/> Printer no/serial/CAN

Device data

1.	New installation
2.	Select the restricted or the ad libitum mode.
3.	Feeding station
3.1	Draining and hold time
3.2	<input checked="" type="radio"/> Enter the turn-on and turn-off delay in case of gradient or servo control.
3.3	<input checked="" type="radio"/> <input checked="" type="radio"/> Enter the minimum and maximum speed in case of servo control (with IFS-feeding station).
3.4	<input checked="" type="radio"/> <input checked="" type="radio"/> Enter pump start and stop in case of servo control (with IFS-feeding station).
3.5	<input checked="" type="radio"/> <input checked="" type="radio"/> Parallel mode: Switch the automatic calibration on or off, determine the time of automatic calibration.
4.	<input checked="" type="radio"/> <input checked="" type="radio"/> Teat slider (close / open after xx min)
5.	<input checked="" type="radio"/> <input checked="" type="radio"/> CalfProtect (open after xx min)
6.	Select the mixer options (drain/OFF delay)

6.1	Switch the draining mode on or off.
6.2	 Empty via teat
6.3	Drain after x minutes (if the mixer draining valve is available)
6.4	OFF delay
7.	Select the milk values
7.1	Select the MP/milk mode or the MP-mode
7.2	Continue with MP / machine stop
7.3	Enter the dry matter.
7.4	Activate milk expelling.
7.5	Commute to the single heating circuit.

Calibration




1.	Water boiler
2.	Water HE
3.	Milk
4.	MP
5.	 Additive 1/2
6.	 Detergent
7.	  Feeding stations 1..
8.	 Concentrate stations 1..
9.	  Animal scales

Register

1.	Antenna test
2.	Select the transmitter number assignment: continuous, automatic.
3.	Read in transmitter numbers.
4.	Select the registration mode: no, automatic, available transmitter numbers.
5.	Register the animals.



Plans

Feed






1.	Feeding plans
2.	Concentration plans
3.	Milk plans
4.	Limitation of quantities: check and, if necessary, adjust the minimum/maximum quantity.
5.	 Check and, if necessary, adjust the maximum speed of the peristaltic pumps.
6.	 Weaning
 Concentrate	
1.	Concentrate plan
2.	Portion size
3.	Limitation of quantities: Check and, if necessary, adjust the minimum/maximum quantity.

4.	Accustoming quantity activated yes/no
4.1	Check and, if necessary, adjust the quantity/threshold.

Change the data of individual animals

1.	Group
2.	Feed
3.	Concentration
4.	Milk ratio
5.	 Concentrate
6.	 Additive 1 / additive 2
7.	Weight
8.	Plan day (correction days)

Cleaning

1.	Settings
1.1	Temperature of the cleaning water
1.2	Detergent quantity
1.3	Teat cleaning
2.	Mixer
3.	 HE (with  serial equipment)
4.	Cleaning circuit
5.	  Air (pulsating compressed-air cleaning)
6.	 (Station) valve cleaning
7.	Sponge
8.	Suction hose

15 Accessories

The following accessories are available for the automatic feeder:


- Stainless steel finish
- Second, **V**third and **V**fourth feeding station
- Additive dispenser Powder
- Additive dispenser Liquid
- Servo control (when the feeding stations are distant from or higher than the automatic feeder as as for **P**parallel feeding)
- Gradient control (when the feeding stations are lower than the automatic feeder)
- Large fly protection door
- Electronic vapor screen for the milk powder outlet
- Electronic vapor screen for the additive dispenser Powder
- Mixer heating
- Equipment for protection against frost
- Powder hopper top section with a capacity of 50 kg
- **V**Pulsating compressed-air cleaning
- **C**Cleaning kit for fully automatic heat exchanger cleaning (Combi and Fresh milk) consisting of:
 - Circulation valve
 - Mixer draining valve
 - Detergent dosing pump
- **VP**Profi kit for Combi and Fresh milk consisting of:
 - Fully automatic heat exchanger cleaning with detergent dosing pump
 - Stainless steel pump 250 W

- Concentrate feeders
- Animal scales
- PC-program „NetTerminal PC“
- PC-program „KalbManagerWIN“
- Förster-gateway CAN Ethernet
- CalfProtect
- Teat slider
- Additional dispenser for second milk powder type








16 Annex

16.1 Menu overview

16.1.1 Main menu (key)

 Animal management	Register	Animal	Group: A..D Correction days: 0 to 99 days <input type="radio"/> Additive 1/2: yes/no Weight in kg: 30 to 250 kg Weight gain in g: xxx g Register?
		Automatic	Mode: [no all available] Group: A..D <input type="radio"/> Additive 1/2: yes/no Weight in kg: 30 to 250 kg Weight gain in g: xxx g
	Cancel	Animal	Plan end: xx days <input type="radio"/> Plan end concentrate 1/2: x days MP: x kg Milk: x L <input type="radio"/> Additive 1/2: x g <input type="radio"/> Concentrate 1/2: x kg <input type="radio"/> Weight: x kg <input type="radio"/> Initial weight: 30 bis 250 kg <input type="radio"/> Weight gain: x g Cancel?
		Group	<Group A..D> Registered: x animals Weaned: x animals Cancel?
		Weaned animals	Registered: x animals Weaned: x animals Cancel?
		Settings	Delete transmitter number: yes/no
	Transfer	<Animal 1..250> Group: A..D	
	Transmitter	New	Transmitter number ‡: xxxxxxxxxxxx Animal number: 0-9999 Allocation animal number: [automatic continuous] Range: [6-3 5-3 5-2 4-2 4-1 3-1] or next: xxxx Accept?
		Change	Transmitter number ‡: xxxxxxxxxxxx Animal number: 0-9999 Transmitter state: [available registered] Read in? Delete?
		Information	Registered: x animals Available: x animals Free: x animals

Menu overview of the Main menu ( key)

 Feeding	Animal	Group: [A..D]	
		Feed	Deviations: 0 - 99 days Quantity: -25.5 to 25.5 L Plan: x.x L Feed: x.x L
		Concentration	Deviations: 0 - 99 days Quantity: -255 to 255 g/L Plan: x.x g/L Concentration: xxx g/L
		Milk ratio in %	
		 C 1/2	Deviations: 0 - 99 days Quantity: -9.9 to 9.9 kg Plan: x.x kg C 1/2: x.x kg
		 Additive 1/2	Dispensed: [no P1 P2 EL] Dosage: 0-99 [g/day g/L g/100 kg] Weight: 30-250 kg Additive 1/Additive 2/Electrolyte: x grams Day with additive: x
		 Weight	Initial weight: 30-250 kg Weight gain: x grams
		Plan day: x	Feeding day: xx Correction days: -99 to 99 days Plan days: xx Plan end: xx days Plan end C 1/2: xx days Feed: x.x L Concentration: xxx g/L Milk ratio: xxx % Concentrate 1/2: x.x kg
	 Additive	Animal	 Additive 1/2: [no P1 P2 EL] Blocked: yes/no
		Group	<Group A..D>  Additive 1/2: [yes no part] Blocked: yes/no
		Medicine prescription	<Prescription 1-4> Periods 1-5: Duration, start and end value Duration: x days Dosage: 0-99 [g/day g/L g/100kg] Distribution: [once twice equal] Dispenser: [1 2 none]
		Electrolyte prescription	Quantity: 0-99 g/L Duration: 1-99 days Electrolyte: 0.5 - 9.5 L Feed: 0 - 9.5 L Waiting time: 30 min - 6 hours Dispenser: [1 2 none]

Menu overview of the Main menu ( key)

Feeding	Plans	Feed	Quantity Concentration Milk ratio Limitation Maximum speed ☑ Weaning
		☑ Concentrate 1/ 2	Quantity Portion size Limitation Accustoming quantity
	Alarm levels	Feed	After: 0 to 9 hours Yesterday: 0 to 99 % Feeding speed: 0 to 99 % Break without additive: xx ☑ Break with additive: xx
		☑ Concentrate 1/ 2	As of: 8:00 a.m. till noon 0 to 99 % Yesterday: 0 to 99 % Plan: 0 to 99 % no alarm: 0 to 99 days
Priority	Alarm: yes/no Additive: yes/no Till feeding day: 0 to 99 Station: none, 1.. 8		
Calibration	<Water boiler> <Water HE> <Milk> <MP> ☑ <Additive 1/2> ☑ <Detergent> ☑ <F-station 1..8> ☑ <C-station 1..8>	Start? Measured? Set quantity in ml or g ☑ Pulses (water HE + boiler, ☑ IFS-C or parallel operation): xxx Runtime in s ☑ Tolerance: 5-50 % Date of last calibration	
	☑ <Scales 1/1..12/2>	Start? Calibration factor: xxxx Animal scales factor: 1.00 to 2.00 Date of last calibration	
Device data	Portion	Set temperature: 10.0 to 44.0 °C Minimum temperature: 0 to 43.5 °C Quantity <250 ml: yes/no Tolerance concentration: ± 0 bis 50 g/L Tolerance milk ratio: ± 0 to 100 %	
	Milk values	[MP-mode MP/milk mode] [continue with MP machine stop] (only with MP/milk mode) Dry matter: 5 to 255 g/L Drain: 0, 1 to 3 hours 1-circuit: < 30-70 %, 100 %	
	Ad libitum-mode	Activated: yes/no Concentration: 0 g/L, 5-255 g/L (only in the ad libitum-mode) Milk ratio: 0 %, 30 to 100 % (only in the ad libitum-mode) ☑ Additive 1/2: 0 to 99 g/L (only in the ad libitum-mode)	

Menu overview of the Main menu ( key)

Device data	Stations	Feed	<F-station 1.. 8> Draining time: 10 to 60 seconds <input checked="" type="radio"/> Turn-on delay: 0.0 to 2.0 seconds <input checked="" type="radio"/> Turn-off delay: 0.0 to 2.0 seconds <input checked="" type="radio"/> <input checked="" type="radio"/> Pump start: 0.2 to 9.9 seconds <input checked="" type="radio"/> <input checked="" type="radio"/> Pump stop: 0.2 to 9.9 seconds <input checked="" type="radio"/> <input checked="" type="radio"/> Maximum speed: 20 to 100 %
		<input checked="" type="radio"/> Concentrate	<C-station 1.. 8> Feed type: [1 2]
		<input checked="" type="radio"/> <input checked="" type="radio"/> Teat slider	Close after: 0 to 9 minutes Open after: 0 to 9 minutes
		<input checked="" type="radio"/> <input checked="" type="radio"/> CalfProtect	Open after: 0 to 30 minutes
	Mixer	Draining mode: yes/no Drain: 0, 5 .. 120 minutes <input checked="" type="radio"/> Empty via teat OFF delay: 3 .. 12 seconds	
Time/date	Time: current time Date: current date		
New installation	Device data <input checked="" type="radio"/> Plans <input checked="" type="radio"/> Medicine prescription <input checked="" type="radio"/> Animal data <input checked="" type="radio"/> Transmitter numbers <input checked="" type="radio"/> Everything		
Cleaning	Mixer	Start?	Detergent: 0 to 25 ml
		Cleaning/day: 0 to 4 Cleaning time 1.. 4: midnight till 11:59 p.m.	
	<input checked="" type="radio"/> Heat exchanger	Start?	Detergent: 0 to 25 ml
		Cleaning/day: 0.. 4 Cleaning time 1.. 4: midnight till 11:59 p.m.	
	Circuit cleaning	Start?	Detergent: 0 to 25 ml
		Water quantity: 1 to 10 L	
	<input checked="" type="radio"/> Compressed air	Start after: 0, 5 to 120 min	
		F-station	<F-station 1.. 8> Start? Mode: [low medium high]
	<input checked="" type="radio"/> Valves	Start? Start after: 0 to 120 min Duration: 1 to 10 s	
Sponge	Start?		
Hose rinsing	<Group A..D> Activated: yes/no As of plan day: 1 to 99		
Settings	Temperature: 10.0 to 50.0 °C Detergent: 0 to 25 ml/L Teat cleaning: yes/no		

Menu overview of the Main menu ( key)

Diagnostic	Valves	Water boiler: open? Water HE: open? Milk: open? Mixer drain: open? Circulation valve: open? ● Air valve: open?		
	Motors	Mixer motor: start? Milk pump: start? Powder motor: start? ● Additive dispenser 1/2: start? ● Detergent pump: start? Feeding pump: start?		
		Circulation pump	start? check?	
	Heating	On? Boiler temperature: xx.x °C		
	Sensors	● Supply electrode: [free covered] ● Spot electrode [free covered] Bar electrode: [free covered] ● Detergent: [ok empty] Button feeding pump (MAP): [active inactive] Boiler: xx.x °C Mixer: xx.x °C	State: [free covered] Milk: start? Water HE: start? Water boiler: start? Mixer: empty?	
		● Water meter	Pulses: xx Water HE: start? Water boiler: start? Mixer: empty?	
	Stations	Feeding stations	<F-station 1 .. 8> Transmitter number. ‡: xxxxxxxxxxxx ● Valve: open? ● Pump: start? ● Teat slider: open? ● CalfProtect: close? ● Feed sensor: [active inactive] Steuerung: IFS-Tränke x oder IFS-Kom- Control unit x/x Search?	
		● Concentrate stations	<C-station x> Transmitter number ‡: xxxxxxxxxxxx Motor: start? Feed bowl: [empty full] Control: IFS-C 1.. 8 Search?	


Menu overview of the Main menu ( key)

Diagnostic	Stations	Scales	<Scales 1/1 .. 12/2> Weigh? Tare? Calibrate?
	Control	Power failures Reset Terminal Database ⓪⓪ <IFS-F 1 .. 8> ⓪ <IFS-F quadruple [1 2]> ⓪ <IFS-C 1 .. 8> <Scales control 1 .. 12> <Scales 1/1 .. 12/2> <Identification F-station 1.. 8> ⓪ <Identification C-station 1.. 8> Heat up	Amount: x Since: dd.mm.yyyy (date) Delete?
	Control	Water shortage Milk shortage Mixer emptying Heating Cleaning Water meter Heat exchanger not filled Milk/circulation valve Boiler sensor Mixer sensor Temperature too high Electrode Calibration ID Double address ID-chip Unknown transmitters Doubel animal no. Circulation pump Detergent ⓪ <Motor sensor C-station 1 .. 8> ⓪ <C-station 1 .. 8 empty>	Amount: x Since: dd.mm.yyyy (date) Delete?
	Version	Device Processor ⓪ ID-chip Terminal <Identification F-station 1 .. 8> ⓪ <Identification C-station 1 .. 8> ⓪⓪ <IFS-F single 1 .. 8> ⓪⓪ <IFS-F quadruple [1 2]> ⓪ <IFS-C 1 .. 8> ⓪⓪ <Scales control 1 .. 8>	ID: xxxxxx Version: xx.xx or Program version: xx.xx Version minibootloader: xx.xx Version bootloader: xx.xx

Menu overview of the Main menu ( key)

Diagnostic	Setup	Language	Selected language	
		Time/date	Time: hh:mm:ss (current time) Date: dd.mm.yy (current date)	
		Machine	Type: [Powder Milk Combi] Number: 1 - 99 Address: 2 - FD System: Interval feeding Operating mode: [SA SM] Animal number: [<input type="radio"/> 50 <input checked="" type="radio"/> 250] HE capacity: [<input type="radio"/> 50 <input checked="" type="radio"/> 250] ml Boiler valve: [<input type="radio"/> Basic <input checked="" type="radio"/> brass] HE valve: [<input type="radio"/> Basic <input checked="" type="radio"/> brass]	
	Setup	Equipment	Mixer drain: yes/no	
			Feeding pump: yes/no	
			<input checked="" type="radio"/> Additive dispenser 1/2: yes/no	
			<input checked="" type="radio"/> Detergent pump: yes/no	
			<input checked="" type="radio"/> Detergent sensor: [no bar external]	
			<input checked="" type="radio"/> Circulation valve: [HE <input checked="" type="radio"/> valve no]	
			<input checked="" type="radio"/> Air valve: yes/no	
			Circulation pump: yes/no	
			Mixer sensor: yes/no	
			<input checked="" type="radio"/> Water meter: yes/no	
			<input checked="" type="radio"/> Supply electrode: yes/no	
			<input checked="" type="radio"/> <input checked="" type="radio"/> Spot electrode: yes/no	
			<input checked="" type="radio"/> MilkMaker: yes/no	
	Heating	Activated: yes/no Relay: [<input checked="" type="radio"/> mechanical <input checked="" type="radio"/> electronical]		
	Identification	Type: [Tiris Nedap]		
	ID-chip	Activated: yes/no Read in?		
Stations	Feed Concentrate Animal scales			
Terminal	CAN-address: 1 to FD (hexadecimal)			
Communication	PC: [serial CAN] Institute: yes/no (only with CAN) Printer: [no serial CAN]			
Software	EXCLUSIVELY FOR FT-INTERNAL PURPOSES			



16.1.2 Menu overview of the manual functions (key)

Extra portion	Start? Output [bucket station 1 .. 8] Quantity: 0.25 to 65.0 L Temperature: 41.0 to 45.0 °C Concentration: 5 - 255 g/L Milk ratio: 0, 30 to 100 % Additive 1: 0 to 99 g/L Additive 2: 0 to 99 g/L
MilkMaker	Start? Automatic: yes/no Quantity: 0.25 to 65.0 L Temperature: 41.0 to 45.0 °C Concentration: 5 - 255 g/L Milk ratio: 0, 30 to 100 % Additive 1: 0 to 99 g/L Additive 2: 0 to 99 g/L
Mixer: empty?	
Milk: suck in?	
Milk: start?	
Water HE: start?	
Water boiler: start?	
Mixer: start?	
F-station	<Station 1 .. 8> Valve open?  Pump start?
HE: fill?	

16.1.3 Menu overview of animal control (key)

Entitled: x animals	As of xx:xx h x.x L Consumption in %: today/yesterday Consumption in L: today/yesterday Electrolyte in L: today/yesterday (if selected)	
	Break off: today/yesterday	<input checked="" type="radio"/> With additive: today/yesterday Without additive: today/yesterday
	Visits: today/yesterday	Last visit: hh:mm:ss (time) Entitled: today/yesterday Not entitled: today/yesterday
Alarm: x animals	Feed consumption: today/yesterday Feeding speed: today/yesterday Break off: today/yesterday Delete all?	
Plan over: x animals	Feeding or concentration plan Additive prescription 1/2 or electrolyte Deviations feed or concentration or additive Delete all?	
<input checked="" type="radio"/> Additive: x animals	Additive 1: dispensed medicine resp. electrolyte prescription yesterday/today: Additive 2: dispensed medicine resp. electrolyte prescription yesterday/today	Dispensed: [no P1 P2 P3 P4 EL] Consumption in %: today/yesterday (only medicine prescription) Consumption in g: today/yesterday (only medicine prescription) Additive 1/2 in g: today/yesterday (only medicine prescription) Dosage in g: xx g/L g/100kg g/day Weight in kg: xx kg (only weight-dependent medicine prescription) Electrolyte: x.x L (only electrolyte prescription) Feed: x.x L (only electrolyte prescription) Day with additive: xx
	Break off today/yesterday	With additive: today/yesterday Without additive: today/yesterday
Marked: x animals	See „all“ (below)	
New: x animals	<Animal number/station plan tendency plan quantity> Transmitter number †.: xxxxxxxxxxxx Animal number: xxxx Group: A..D	
	Feed: xx.x l	Deviations: 0 to 99 days Quantity: -25.5 to 25.5 L Plan: x.x L Feed: x.x L
	Concentration: xxx g/L	Deviations: 0 to 99 days Quantity: -255 to 255 g/L Plan: xxx g/L Concentration: xxx g/L
	<input checked="" type="radio"/> C 1/2: x.x kg	Deviations: 0 to 99 days Quantity: -9.9 to 9.9 kg Plan in: x.x kg C 1/2: x.x kg

Menu overview of animal control ( key)

	 Additive 1/2	Dispensed: [no medicine prescription P1..4 electrolyte prescription]	
		Dosage: xx g/L or xx g/100 kg or xx g/day	Deviations: 0 to 99 days Quantity: xx g/L g/100 kg g/day Prescription: xx g/L g/100 kg g/day Dosage: xx g/L g/100 kg g/day
		Weight: xx kg	Weight: 30 to 250 kg Weight gain: xxx g
		Additive 1/2: xx.x g	
		Day with additive: xx	Day with additive: xx Correction days: 0 to 99 days Prescription day: 1 Prescription end: xx days
New: x animals	Weight: xx kg	Weight: 30 to 250 kg Weight gain: xxx g	
	Plan day: xx	Feeding day: xx Correct: 0 to 99 days Plan day: xx Plan end: xx days  Plan end C 1/2 in: xx days Feed: xx.x L Concentration: xxx g/L Milk ratio in % C 1/2: x.x kg	
	Time: hh.mm.ss (time of registration)		
	Date: dd.mm.yyyy (date of registration)		
	Confirm?		
	Double: x animals	<Animal number/group station plan tendency plan quantity> Transmitter number ‡: xxxxxxxxxxxx Animal number: xxxx Time: hh:mm:ss (time of occurrence) date: dd.mm.yyyy (date of occurrence) Confirm?	
Unknown: x animals	<xxxxxxxxxxxx .. xxxxxxxxxxxx > (list of all unknown transmitter numbers) Transmitter number ‡: xxxxxxxxxxxx Amount: x Time: hh.mm.ss (time of occurrence) date: dd.mm.yyyy (date of occurrence) Delete?		

Menu overview of animal control ( key)

All : x animals	Consumption in %: today/yesterday	As of xx:xx h x.x L Consumption in %: today/yesterday Consumption in L: today/yesterday	
		● EL in L: today/yesterday	
		Feed in L: today/yesterday	Deviations: 0 to 99 days Quantity: -25.5 to 25.5 L Plan: xx.x L Feed: xx.x L
		Concentration in g/L: today/yesterday	Deviations: 0 to 99 days Quantity: -255 to 255 g/L Plan: xxx g/L Concentration: xxx g/L
		Milk ratio in %: today/yesterday	
		● Concentrate 1/2: today/ yesterday	Deviations: 0 to 99 days Quantity: -9.9 to 9.9 kg Plan in: x.x kg C 1/2: x.x kg
	Break-off: today/yesterday	● With additive: yesterday/today Without additive: yesterday/today	
	Feeding speed: today/yesterday	Relative in %: today/yesterday Absolute in L/min: today/yesterday	
	Visit: today/yesterday	Last: hh:mm:ss (time of last visit) Entitled: yesterday/today Not entitled: yesterday/today	
	● C 1/2 in %: today/yesterday	As of xx:xx h x.x kg Consumption in %: today/yesterday Consumption in kg: today/yesterday 3 days in kg: today/yesterday	
Concentrate 1/2 in kg: today/yesterday		Deviations: 0 to 99 days Quantity: -9.9 to 9.9 kg Plan in: x.x kg Concentrate 1/2: x.x kg	
Feed in L: today/yesterday		Deviations: 0 to 99 days Quantity: -25.5 to 25.5 L Plan: xxx g/L Feed: xx.x L	
Feeding day: xx	Feeding day: xx Correct: 0 to 99 days Plan day: xx Plan end in: xx days ● Plan end C 1/2 in: xx days Feed: xx.x L Concentration: xxx g/L Milk ratio: xxx % ● Concentrate 1/2: x.x kg		

Menu overview of animal control ( key)

Total consumption	Total	Milk powder (MP) Milk ● Additive 1/2 ● Concentrate 1/2	Today: Set/actual value [L g kg] Yesterday: Set/actual value [L g kg] The day-before-yesterday: Set/actual value [L g kg]
	Animal	<Animal number/group station plan tendency plan quantity> Milk powder (MP): xx kg Milk: xxx L ● Additive 1/2: xxxx g ● Concentrate 1/2: xxx kg	
Print	Alarm list	Print alarm list?	
	Feed list	Print feed list?	

EC declaration of conformity

according to the EU Machinery Directive 2006/42/EG, Annex II, 1.A

Manufacturer:

Förster Technik GmbH,
Gerwigstr. 25
78234 Engen

Person residing within the Community authorised to compile the relevant technical documentation:

Müller Barbara
Förster Technik GmbH,
Gerwigstr. 25
78234 Engen

Description and identification of the machinery:

Make: Automatic feeder
Type: TAK5-VH1-28-P2, TAK5-VH1-30-P2, TAK5-VH1-32-F2, TAK5-VH1-32-P2, TAK5-VH1-50-F2, TAK5-VH1-50-P2, TAK5-VH1-55-P2, TAP5-VH1-28-F2, TAP5-VH1-30-F2, TAP5-VH1-32-F2, TAP5-VH1-50-F2, TAP5-VH1-55-F2, VDW5-VH1-28-P2, VDW5-VH1-32-F2, VDW5-VH1-32-P2, VDW5-VH1-50-F2, VDW5-VH1-50-P2, TAK5-CE1-25, TAP5-CE1-25, TAK5-CH1-25, TAP5-CH1-25, VDW5-CE1-25, VDW5-CH1-25, TAK1-SA2-32-S, TAK1-SA2-50-S, TAK2-SA2-50-S, TAK2-SA2-75-S, TAK2-SA2-80-S, TAP1-SA2-32-S, TAP1-SA2-50-S, TAP2-SA2-32-S, TAP2-SA2-50-S, TAP2-SA2-75-S, VDW1-SA2-32-S, TAK1-KU2-27-L, TAK1-KU2-27-L1, TAK1-KU2-38-L, TAK1-KU2-50-M, TAK1-KR1-50-M, TAK5-KR3-55-P2, TAK6-KR3-87-P2, TAP1-ZM2-27-F, TAP1-ZM2-32-M, TAP1-ZM2-38-M, TAP1-ZM2-50-M, TAP2-ZM2-32-M, TAP2-ZM2-50-M, TAP2-ZM2-75-M, VDW1-WA2-38-M, TAP0-EZ1-28-M, TAP0-EZ1-32-M, TAP0-EZ1-38-M, TAP0-EZ1-50-M, TAP1-EZ1-32-M, TAP1-EZ1-38-M

It is expressly declared that the machinery fulfils all relevant provisions of the following

EU Directives:


2006/42/EG:2006-05-17 EU Machinery Directive 2006/42/EG
2004/108/EG:2004-12-15 (Elektromagnetische Verträglichkeit) Richtlinie 2004/108/EG des Europäischen Parlaments und des Rates vom 15. Dezember 2004 zur Angleichung der Rechtsvorschriften der Mitgliedstaaten über die elektromagnetische Verträglichkeit und zur Aufhebung der Richtlinie 89/336/EWG

Reference to the harmonised standards used, as referred to in Article 7(2):


EN ISO 12100-1:2003-11 Sicherheit von Maschinen - Grundbegriffe, allgemeine Gestaltungsleitsätze - Teil 1: Grundsätzliche Terminologie, Methodologie
EN ISO 12100-2:2003-11 Sicherheit von Maschinen - Grundbegriffe, allgemeine Gestaltungsleitsätze - Teil 2: Technische Leitsätze
EN ISO 14121-1:2007 Sicherheit von Maschinen - Risikobeurteilung - Teil 1: Leitsätze (ISO 14121-1:2007)
EN 60204-1:2006-06 Sicherheit von Maschinen - Elektrische Ausrüstung von Maschinen - Teil 1: Allgemeine Anforderungen

Engen, 2009.12.30

Place, date



Signature
Markus Förster
Geschäftsführer




Signature
Thomas Förster
Geschäftsführer

16.3 Default feeding plans

16.3.1 Group A

Stand Alone Standard Feeding plan Group A Förster-Technik

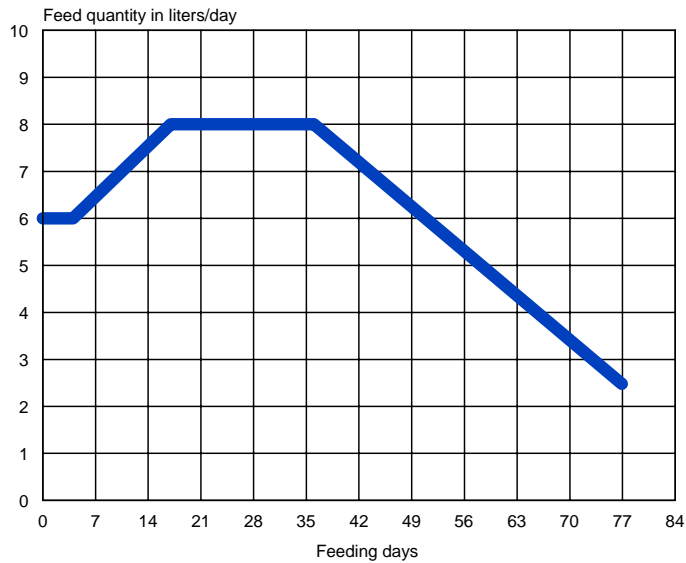

Standard feeding plan:

P1: 3 days: from 6 to 6 L
 P2: 14 days: from 6 to 8 L
 P3: 18 days: from 8 to 8 L
 P4: 42 days: from 8 to 2.5 L

Total: 77 days = 478 L

Standard concentration plan:

P1: 77 days: from 135 to 135 g/L


Total: 77 days = 64 kg MP

Standard limitation of quantities:

P1: 14 days: 1.5 L (min.)	2.0 L (max.)
P2: 14 days: 2.0 L	2.5 L
P3: 49 days: 2.5 L	3.0 L

16.3.2 Group B

Stand Alone Standard Feeding Plan Group B Förster-Technik

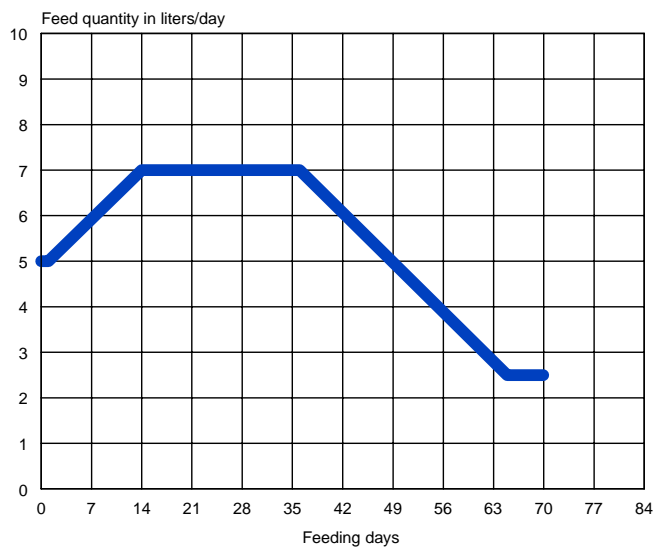

Standard feeding plan:

P1: 14 days: from 5 to 7 L
 P2: 21 days: from 7 to 7 L
 P3: 30 days: from 7 to 2.5 L
 P4: 5 days: from 2.5 to 2.5 L

Total: 70 days = 384 L

Standard concentration plan:

P1: 70 days: from 135 to 135 g/L


Total: 70 days = 51 kg MP

Standard limitation of quantities:

P1: 14 days: 1.5 L (min.)	2.0 L (max.)
P2: 14 days: 2.0 L	2.5 L
P3: 42 days: 2.5 L	3.0 L

16.3.3 Group C

Stand Alone Standard Feeding Plan Group C Förster-Technik

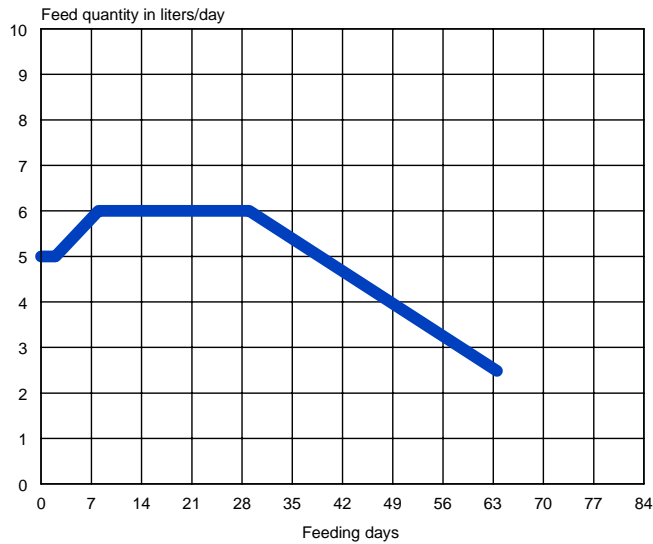**Standard feeding plan:**

P1: 2 days: from 5 to 5 L
 P2: 6 days: from 5 to 6 L
 P3: 21 days: from 6 to 6 L
 P4: 35 days: from 6 to 2.5 L

Total: 64 days = 316 L

Standard concentration plan:

P1: 64 days: from 135 to 135 g/L


Total: 64 days = 42 kg MP

Standard limitation of quantities:

P1: 14 days: 1.5 L (min.)	2.0 L (max.)
P2: 14 days: 2.0 L	2.5 L
P3: 36 days: 2.5 L	3.0 L

16.3.4 Group D

Stand Alone Standard Feeding Plan Group D (Early Weaning) Förster-Technik

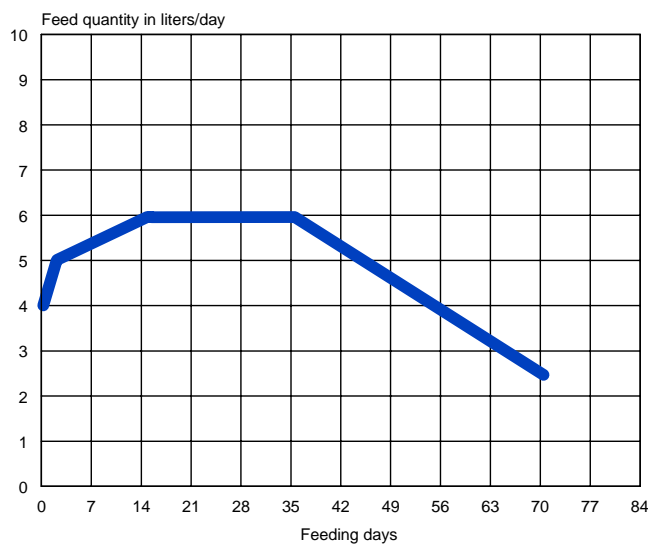**Standard feeding plan:**

P1: 2 days: from 4 to 5 L
 P2: 13 days: from 5 to 6 L
 P3: 21 days: from 6 to 6 L
 P4: 35 days: from 6 to 2.5 L

Total: 71 days = 353 L

Standard concentration plan:

P1: 71 days: from 135 to 135 g/L


Total: 71 days = 47 kg MP

Standard limitation of quantities:


P1: 7 days: 1.0 L (min.)	1.5 L (max.)
P2: 14 days: 1.5 L	2.0 L
P3: 14 days: 2.0 L	2.5 L
P4: 36 days: 2.5 L	3.0 L

16.3.5 Template for individual feeding plan

Feeding plan

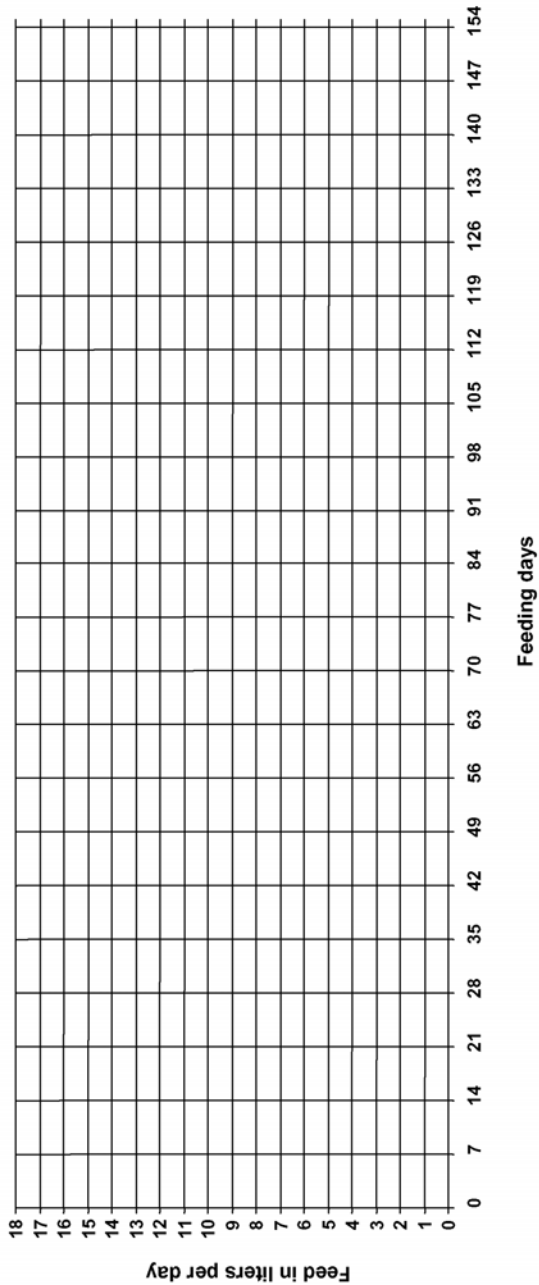


16.4 Basic principle of interval feeding

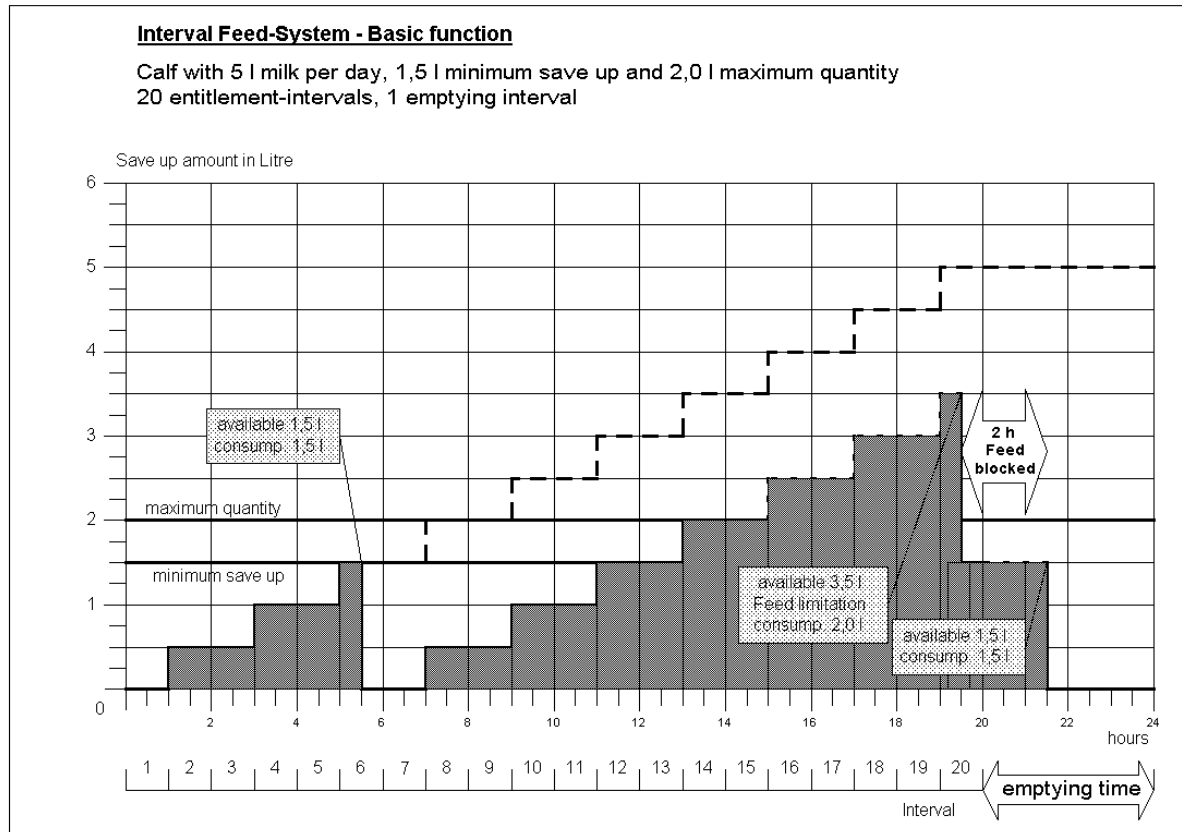


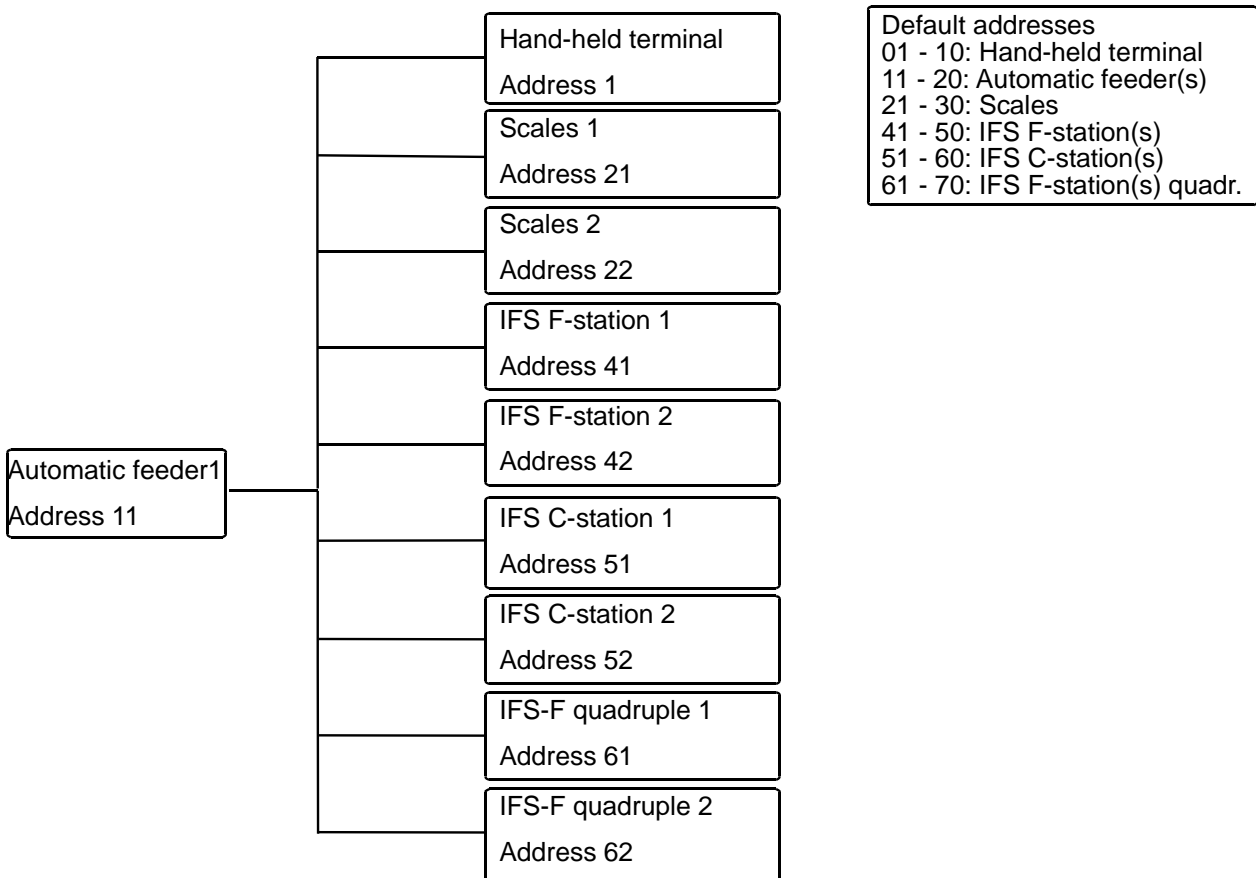
16.5 CAN-bus addresses

16.5.1 Default addresses


The graph below is intended to exemplify how to allocate addresses according to default values. On the following page you can allocate addresses according to your needs. Just copy the template, if required.

 **Note:** Please note that a number can be allocated only once.

 **Note:** It is recommended not to change the default addresses.



16.5.2 Template for individual allocation of addresses

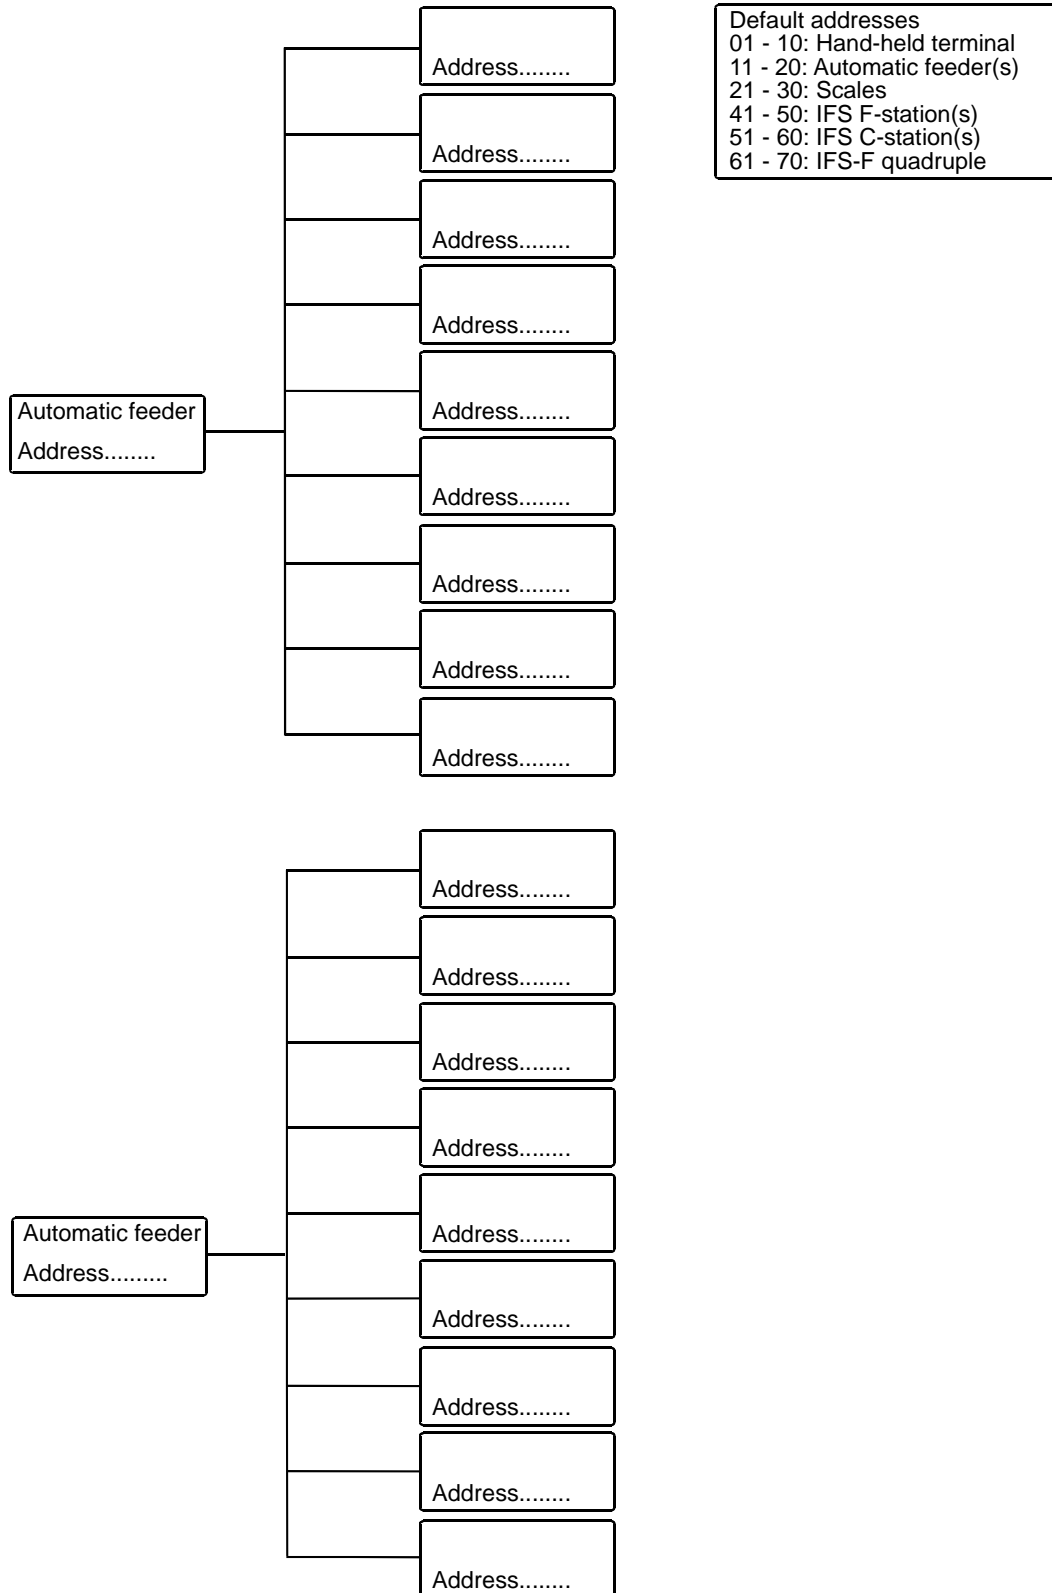

A

- Abbreviations 14
- Accessories 201
- Ad libitum
 - Feed dispense 108
 - Mode 73
- Additive
 - Administer 126
 - Animal-specific EL dispense 133
 - Animal-specific medicine dispense 132
 - Blocking the remaining portion 137
 - Changing the dispense 135
 - Creating a medicine prescription plan 127
 - Creating an EL prescription plan 131
 - Dispensing to a group 133
 - Distribution 128
 - Dosage as day quantity 127
 - Dosage depending on feed quantity 127
 - Weight-dependent dosage 127
- Alarm animals
 - Giving priority 108
- Alarm levels 123
- All animals
 - Check 159
- Allocating the CAN-bus-address
 - Concentrate station 67
 - Feeding station 64, 66
- Animal control 159
 - Alarm animals 164
 - All animals 159
 - Animals with additive 165
 - Checking break off 162
 - Checking the feeding day 163
 - Checking the feeding speed 162
 - Checking the visits 163
 - Consumption check 160
 - Entitled animals 163
 - Marked animals 159
 - Newly housed animals 167
 - Plan over 165
 - Unknown transmitters 168
- Animal identification 91
 - Cancelling the animals 100
 - Transmitter numbers
 - Reading in automatically 93, 94
- Animal management 91
- Animals
 - Cancel 102
 - Cancelling individually 100
 - Registration 100
- Animals with additive
 - Check 165
 - Giving priority 108
- Antennas
 - Connection 44
 - Test 154
- Asterisk 29

- Automatic feeder
 - Dimensions 23
 - Technical data 22
 - Weight 23
- Automatic mode 31

B

- Blocking the remaining portion 137
- Break off
 - Check 162

C

- Calibration 85
 - Detergent 85
 - Liquid feed components 85
 - Powder feed components 87
- CAN-Bus-address allocation
 - Scales 68
- Care and maintenance plan 193
- Changing the feeding plans 115
- Changing the group 112
- Checking plan over 165
- Checking the alarm animals 164
- Checking the entitled animals 163
- Checking the heating 152
- Checking the motors 151
- Checking the sensors 152
- Cleaning 139
 - Circuit cleaning 143
 - Heat exchanger 142
 - Mixer
 - Automatic cleaning (time-controlled) 141
 - Mixer cleaning
 - Starting manually 142
 - Pulsating compressed-air cleaning 145
 - Settings 139
 - Sponge cleaning 146
 - Station valves 146
 - Suction hose 148
- Combi-mode 80
- Components 16
 - Compact 16
 - CPU 18
 - Heat exchanger 20
 - Relay power board 18
 - Vario 17
- Compressed-air cleaning, pulsating 145
- Concentrate station
 - Allocating the CAN-bus-address 67
 - Check 155
 - Configuration 67
- Concentration plans
 - Change 117
- Connection
 - antennas 44

Consumption check 160

D

Date/time

Checking and adjusting 71

Device data 71

Diagnostic 151

Concentrate station 155

Control 155

Feeding station 153

Heating 152

Scales 155

Sensors 152

Valves/Motors 151

Version 157

Displays 32

Automatic mode 31

Symbols 32

Double animal numbers 168

Draining mode 79

Draining time 75

Dry matter 81

E

EL

Creating a prescription plan 131

Electrical connection 22, 39

Electrolyte

Animal-specific dispense 133

Dispense 131

Extra portion dispense 109

F

Failures 171

Boiler sensor 178

Calibration 179

Cleaning 180

CRC-error 171

Heating 177

ID-chip 180

IFS-version 181

Milk empty 179

Milk/circulation valve 178

Mixer emptying 176

Output error 181

Supply electrode 179

Water meter 175

Water shortage 174

Feed distribution 105

Parallel mode 106

Priority mode 106

Feed preparation 105

Feed quantity

Booking 116

Feed quantity and concentration

Change 112

Feeding day

Check 163

Feeding regime 106

Feeding speed

Check 162

Feeding station

Allocating the CAN-bus-address 64, 66

Check 153

Configuration 62

IFS-compact unit quadruple 65

IFS-unit single 63

Internal, controlled by feeder 62

Giving priority 108

Valve cleaning 146

Filling the milk powder hopper 53

Förster-Technik, address 15

Frost protection equipment

Activation 51

Functioning of the automatic feeder 105

Feed distribution 105

Ad libitum 108

Feed preparation 105

Maximum quantity 107

Minimum quantity 107

Restricted feed dispense 106

G

Gradient control 76

Group

Changing the group 103

H

Heat exchanger

Cleaning 142

Separate heating circuits 20

Sponge cleaning 146

I

Identification

System 2

Interval feeding program 220

M

Maintenance 193

Marked animals

Check 159

Maximum quantity

Functioning 107

Maximum speed plan 122

Medicine

Creating a prescription plan 127

Dispense 131

- Milk expelling
 - Activation 81
- Milk powder 52
- Milk powder hopper
 - Filling 52
 - Storage capacity 23
- Milk supply 43
- Minimum quantity
 - Functioning 107
 - Select 120
- Minimum temperature 48
- Mixer
 - Cleaning 140
 - Automatic/time-controlled 141
 - Starting manually 142
 - Draining via draining valve 78
 - Emptying 79
 - According to time 79
 - Emptying via teat 78
 - OFF delay 79
- Mixer heating
 - Activation 51
- MP-mode 80
- N**
- New animal numbers 167
- New installation 72
- O**
- Operating mode 31
 - Automatic mode 31
- Operation
 - Keyboard 25
 - Operating elements and menu structure 26
- Overview
 - Setup menus 55
- Overview CAN-bus-addresses 221
- P**
- Parallel mode 106
 - Portion dispense when entitlement 50
 - Setting the parameters 50
 - Tolerance values
 - Concentration 50
- Plan for limited quantities 120
- Plans
 - Concentration plan 117
 - Feeding plan 115
 - Limited quantities 120
 - Maximum speed 122
 - Milk ratio plan
 - Change 119
- Power failures 155
- Priority of animals 108
- Program configuration
 - Device data 71
 - Checking and adjusting date/time 71
 - Draining and hold time 75
 - Gradient control 76
 - New installation 72
 - Restricted/ad libitum-mode 73
 - Servo control 76
 - Setup 55
 - Overview of the program menus 55
- Protective grating for powder hopper extension 40
- Pulsating compressed-air cleaning 145
- R**
- Read the version number 157
- Restricted feed dispense 106
- Restricted mode 73
- S**
- Safety instructions 9
 - Safety signs 11
- Scales
 - Allocating the CAN-bus-address 68
 - Check 155
 - Configuration 68
- Search mode
 - Concentrate station 67
 - Feeding station 64, 66
- Servo control 76
- Setup 55
- Single heating circuit 82
- Sponge cleaning 146
- Start-up 39
 - Activating the mixer heating 51
 - Activating the vapor screen 51
 - Connecting the antenna cable to the motherboard 45
 - Filling the milk powder hopper 52
 - Locating the automatic feeder 40
 - Mounting the feeding station 44, 47
 - On-site electrical connection 39
 - Protective grating for powder hopper extension 40
 - Settings feed portion 48
 - Water and milk supply 42
 - Water pressure 42
- Stations
 - Allocation 61
 - Check 153
- Suction hose cleaning 148
- SynchroFeed 106
- T**
- Target and minimum temperature 48
- Temperature
 - Recommendations feed temperature 49

Target and minimum temperature 48

Time

Checking and adjusting 71

Tolerance values

Milk ratio 50

Total duration of feeding

Change 113

Transmitter numbers

Management 91

Reading in automatically 93, 94

U

Unknown transmitters 168

V

Valves 151

Vapor screen

Activation 51

Visits

Check 163

W

Warnings 171, 182

Automatic calibration 187

Calibration 187

Circulation pump 188

Detergent 188

ID-chip 188

Identification 182

IFS-concentrate station 184

IFS-feeding station 183

Milk empty 186

Mixer draining 185

Mixer sensor 186

Motor concentrate station 184

Motor feeding station 184

Scales 185

Unknown transmitters 186

Water meter 185

Water pressure 42

Water supply 23, 42