

## Mounting instructions

Mounting the separation bracket

**M17.3e**

**Re:** Drinking station

**Date** July 7, 2007


**Page** 1 of 2

**Retrofitting**




### Mounting the separation bracket


1. Remove the supply hose through the quick coupling (2).  
After that, detach the flipping teat bracket (1).  
To do so, use a spanner size 14 and an Allen key size 5.

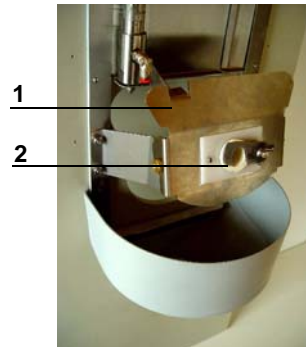


2. Both angle brackets of the teat bracket are secured with two self-locking nuts (3) each.  
Loosen them with a spanner size 10.

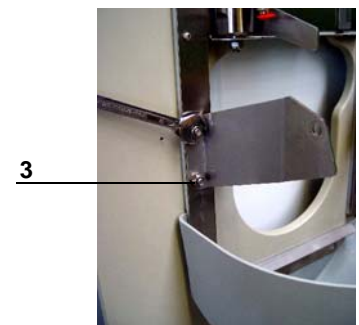

3. Unscrew the lower splash guard (4) to which - among others - the dribble bowl (5) is secured, with a Phillips screwdriver.

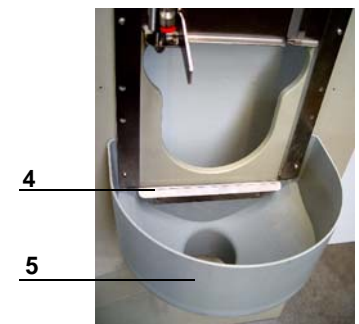

4. Widen the blind hole (6) by means of a drill Ø 6 mm.

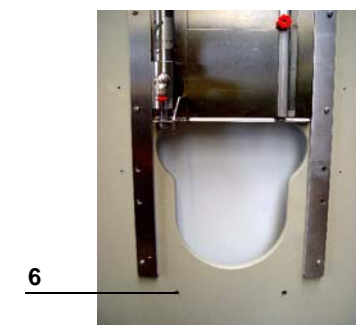

**Mounting instructions**

Mounting the separation bracket

**M17.3e**

**Re:** Drinking station


**Date** July 7, 2007

**Page** 2 of 2


**Retrofitting**



5. The retrofit kit contains a separation bracket (7) with splash guard (8). The included screws fit the bore holes. Screw the dribble bowl together with the splash guard (8) on the front plate (9).

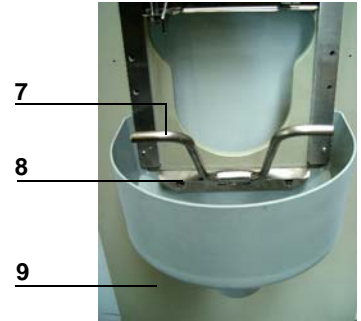

6. Use the screws loosened before to mount the included angle brackets. Before screwing, put the separation bracket into the fitting bores (10).

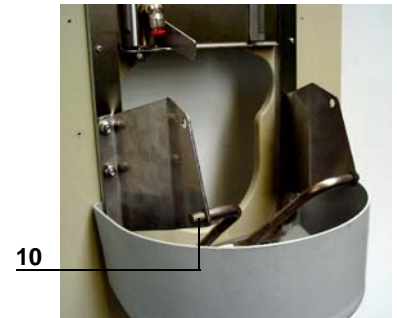

7. Finally screw on the flipping teat bracket with both angle brackets. It is recommended to fix the screws (11) with a special glue (e.g. Loctite). After you have connected the supply hose, the drinking station is operational again.

